


GEOLOG s.r.l.

Commissioner: PROGRA s.r.l.


Site: Discarica Hera V. Romea N.
Locality: RavennaTest Location: Discarica CPTU 1
Date: 16/03/2005Abs. quota (cm): 0
Prehole (cm): 0
Hydrostatic Line (cm): 195

Page 1/3

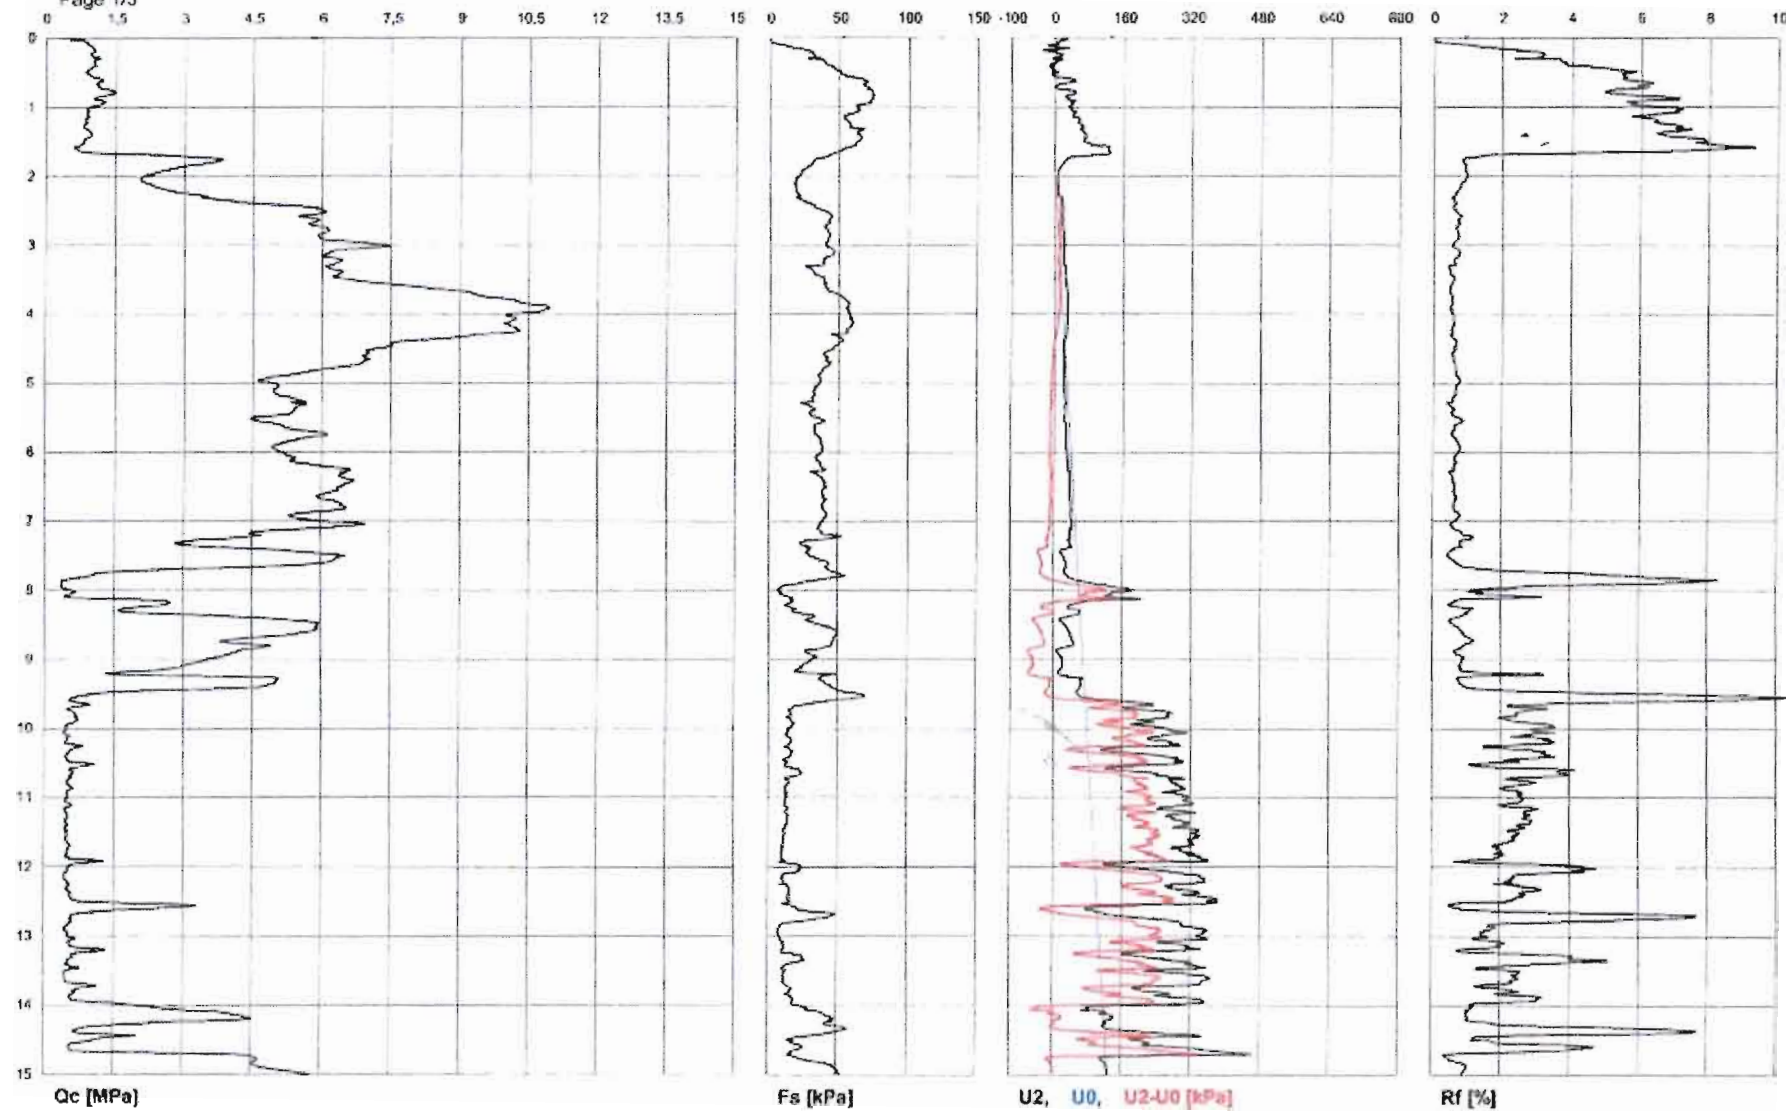

GEOLOG s.r.l.		Commissioner: PROGRA s.r.l.	
Site: Discarica Hera V. Romea N. Locality: Ravenna		Test Location: Discarica CPTU 1 Date: 16/03/2005	Abs. quota [cm]: 0 Prehole [cm]: 0 Hydrostatic Line [cm]: 195

Page 2/3

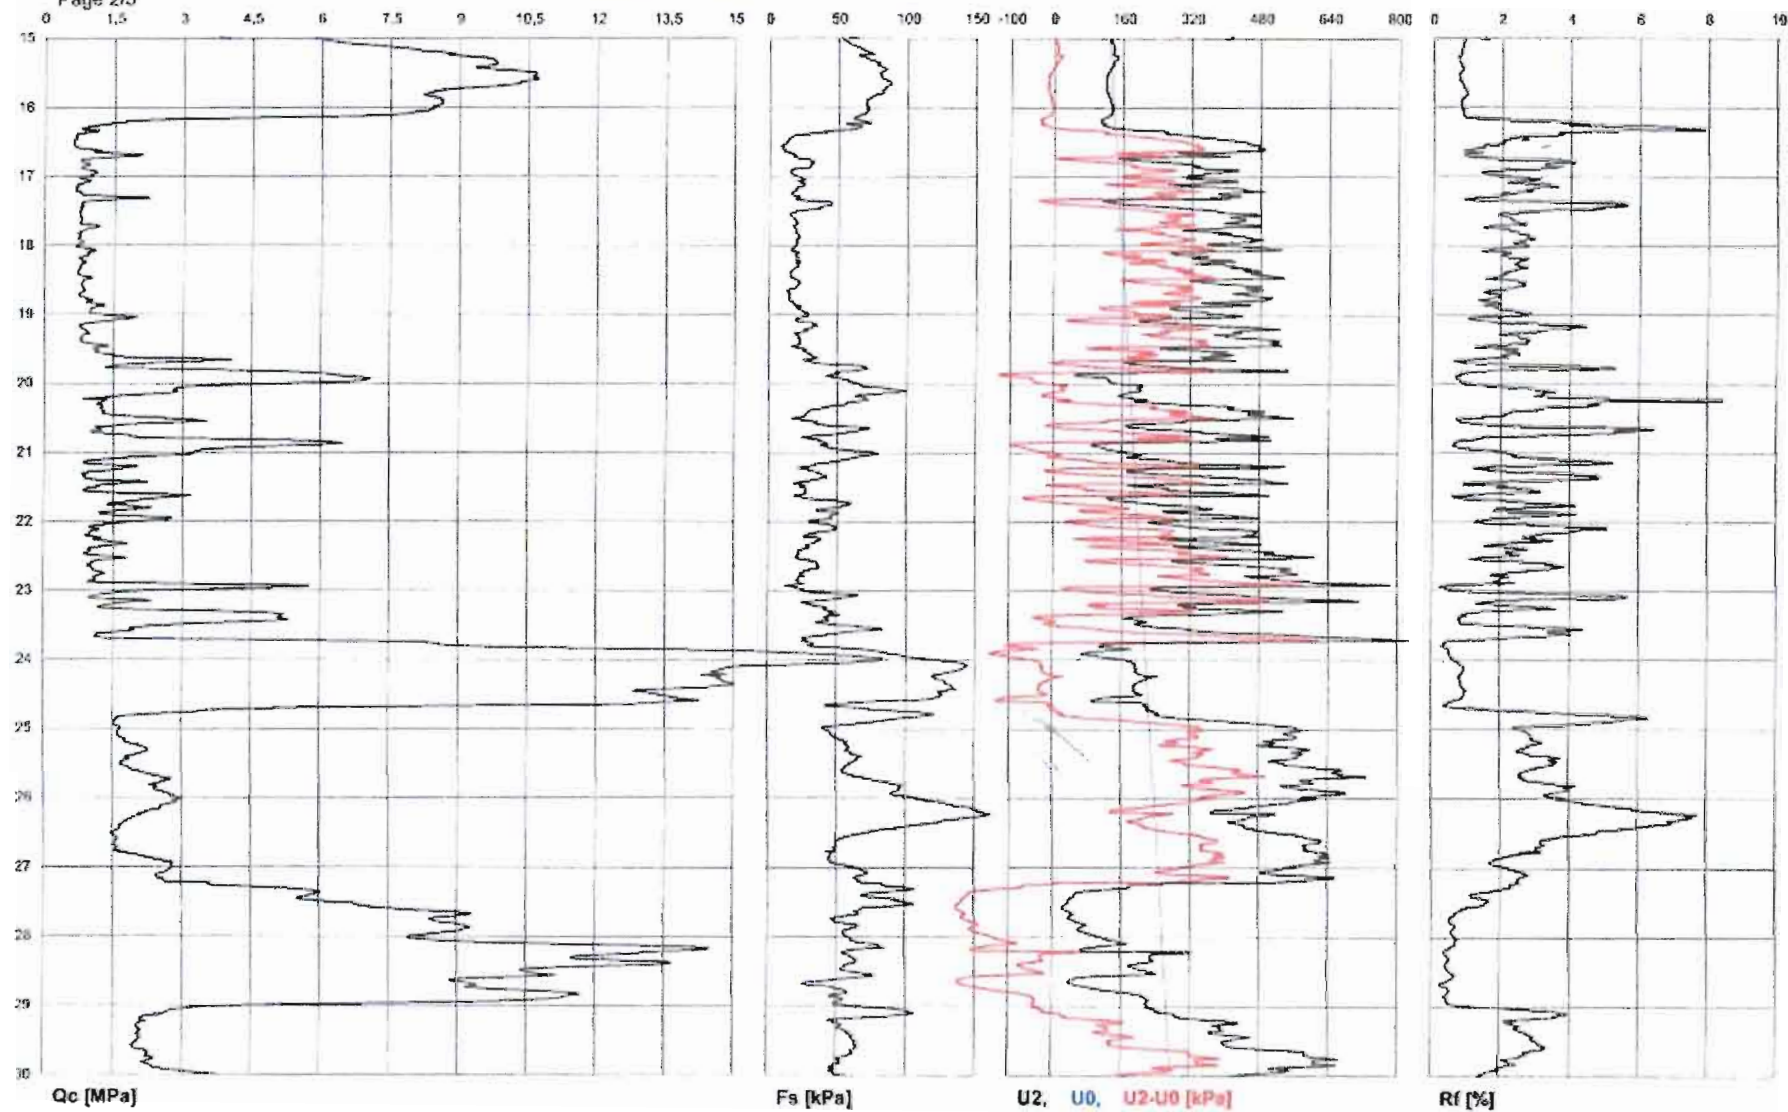

GEOLOG s.r.l.


Commissioner: PROGRA s.r.l.

Site: Discarica Hera V. Romea N.
Locality: Ravenna

Test Location: Discarica CPTU 1
Date: 16/03/2005

Abs. quota [cm]: 0
Prehole [cm]: 0
Hydrostatic Line [cm]: 195

Page 3/3

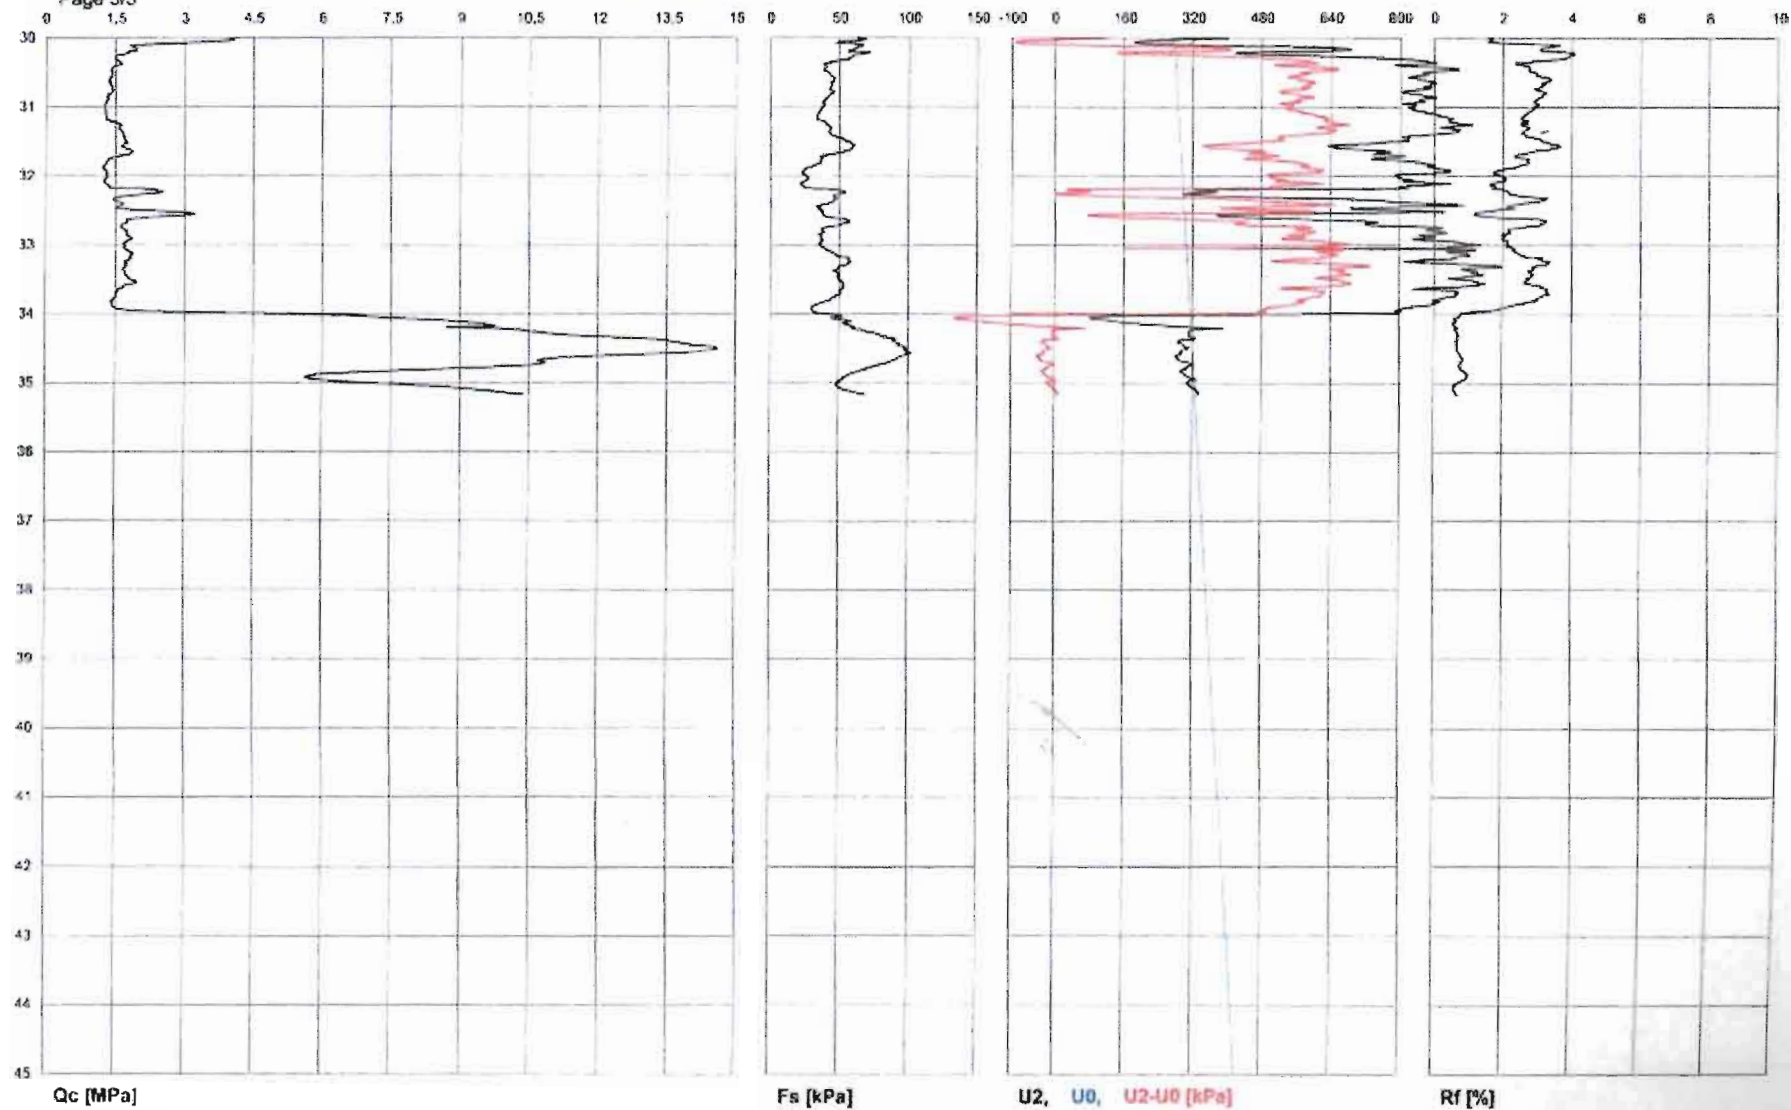

elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA

tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it

P.IVA e Codice Fiscale n. 00174600387

AZIENDA CON SISTEMA DI GESTIONE

INTEGRATO CERTIFICATO DA DNV

UNI EN ISO 9001:2000

UNI EN ISO 14001

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi**CANTIERE** Polisportivo Ponte Nuovo - Ravenna**CPT N°** CPTU 02 PROF. FALDA (m da p.c.) 1.00**DATA** 08/04/10 PREFORO (m da p.c.)**TIPO PUNTA** piezocono G1 - CPL2IN**COMMESSA** 8042/10 C. SITO N°: 573/10 del 28/04/10

prof.	qc	fs	U	incl.	prof.	qc	fs	U	incl.	prof.	qc	fs	U	incl.
m	Mpa	kPa	kPa	gradi	m	Mpa	kPa	kPa	gradi	m	Mpa	kPa	kPa	gradi
2.0	2.08	48.17	68.93	1.88	15.20	14.08	75.55	49.84	9.71	30.20	2.16	49.05	673.21	20.89
4.0	2.55	95.01	29.50	0.58	15.40	13.24	78.93	30.80	9.88	30.40	2.26	61.61	635.42	21.00
6.0	1.95	146.50	34.86	0.70	15.60	12.84	72.93	50.00	10.07	30.60	2.53	62.39	649.13	21.08
8.0	1.60	148.27	38.96	0.73	15.80	11.57	73.96	48.28	10.20	30.80	4.47	67.67	389.44	21.20
10.0	1.16	110.60	50.21	0.81	16.00	12.30	67.97	86.08	10.35					
12.0	0.76	39.60	60.94	0.96	16.20	11.33	65.17	37.74	10.52					
14.0	0.61	23.59	41.68	0.96	16.40	12.81	70.16	36.13	10.65					
16.0	0.56	12.98	58.11	1.05	16.60	12.66	72.54	24.92	10.82					
18.0	1.13	15.63	35.18	1.10	16.80	11.93	75.98	26.80	10.95					
20.0	0.73	20.49	72.20	1.18	17.00	11.73	62.84	35.13	11.15					
22.0	0.78	20.48	79.81	1.25	17.20	13.45	75.89	101.34	11.32					
24.0	0.92	42.32	45.90	1.37	17.40	13.52	84.70	89.80	11.53					
26.0	0.78	49.22	63.93	1.49	17.60	13.46	89.53	97.23	11.71					
28.0	0.59	38.75	55.17	1.57	17.80	13.31	73.85	98.95	11.88					
30.0	0.54	24.25	71.93	1.64	18.00	13.74	90.87	115.10	12.07					
32.0	0.48	18.68	88.69	1.74	18.20	14.84	94.07	138.64	12.23					
34.0	0.41	18.52	111.77	1.82	18.40	16.67	101.56	132.37	12.41					
36.0	0.40	16.94	112.72	1.91	18.60	14.22	92.45	95.90	12.57					
38.0	0.40	16.00	118.10	2.00	18.80	16.13	79.74	188.81	12.80					
40.0	0.35	14.54	125.48	2.07	19.00	20.12	73.53	174.88	13.08					
42.0	0.31	11.32	132.59	2.15	19.20	15.52	55.38	139.30	13.30					
44.0	0.34	8.85	145.46	2.22	19.40	16.83	91.54	56.27	13.52					
46.0	0.36	9.97	169.72	2.33	19.60	18.06	112.56	125.32	13.74					
48.0	0.29	8.95	178.37	2.35	19.80	14.15	109.18	97.18	13.94					
50.0	0.28	7.87	188.37	2.44	20.00	7.05	76.91	102.06	14.11					
52.0	0.28	8.24	214.78	2.49	20.20	2.21	66.04	395.10	14.28					
54.0	0.30	10.20	241.48	2.59	20.40	1.70	71.56	347.54	14.42					
56.0	0.30	9.82	250.25	2.64	20.60	0.94	33.09	401.98	14.57					
58.0	0.30	9.10	258.74	2.69	20.80	1.07	10.76	450.94	14.68					
60.0	0.37	9.51	265.45	2.78	21.00	1.38	14.80	529.08	14.85					
62.0	1.50	12.37	107.61	2.87	21.20	1.49	37.99	317.13	14.96					
64.0	4.17	26.50	96.96	2.91	21.40	1.44	18.64	414.86	15.05					
66.0	4.34	29.02	114.22	2.99	21.60	2.09	29.13	392.60	15.16					
68.0	4.47	25.05	119.93	3.10	21.80	2.46	38.02	271.78	15.34					
70.0	5.13	29.89	130.26	3.20	22.00	1.80	31.04	411.75	15.46					
72.0	6.26	30.32	100.84	3.30	22.20	2.42	37.88	430.34	15.63					
74.0	9.38	40.35	91.35	3.46	22.40	6.35	66.24	65.60	15.84					
76.0	8.33	54.28	96.24	3.58	22.60	3.61	83.65	201.96	16.03					
78.0	5.54	37.24	64.04	3.69	22.80	6.15	42.29	61.10	16.24					
80.0	5.56	30.06	57.27	3.83	23.00	3.51	49.12	250.19	16.38					
82.0	7.09	33.58	87.97	4.00	23.20	1.41	38.50	545.01	16.54					
84.0	6.59	45.83	111.39	4.17	23.40	1.33	35.69	481.57	16.65					
86.0	5.81	39.50	87.24	4.29	23.60	1.16	28.75	458.04	16.75					
88.0	7.22	34.27	76.03	4.42	23.80	1.21	14.88	558.55	16.83					
90.0	8.07	42.80	78.31	4.57	24.00	1.48	19.64	506.27	16.92					
92.0	12.7	45.98	26.64	4.73	24.20	1.91	56.17	402.26	17.02					
94.0	15.5	41.15	4.88	4.94	24.40	1.62	74.42	355.98	17.11					
96.0	15.6	48.23	38.24	5.12	24.60	1.21	40.84	386.28	17.22					
98.0	16.7	47.74	58.88	5.27	24.80	1.62	18.38	545.34	17.36					
100.0	18.8	50.05	42.62	5.44	25.00	1.84	63.77	456.43	17.51					
102.0	15.9	55.97	83.14	5.58	25.20	2.08	87.37	355.31	17.64					
104.0	18.1	53.26	71.26	5.70	25.40	2.22	85.09	384.67	17.78					
106.0	16.24	42.58	65.10	5.86	25.60	2.06	75.30	395.60	17.94					
108.0	6.71	38.98	64.04	5.99	25.80	2.03	46.86	484.12	18.07					
110.0	6.98	41.49	75.26	6.16	26.00	2.11	37.60	634.31	18.25					
112.0	8.40	47.93	107.50	6.30	26.20	2.21	52.09	708.57	18.50					
114.0	9.32	60.70	106.17	6.46	26.40	2.22	74.32	655.01	18.73					
116.0	9.55	65.83	121.49	6.62	26.60	2.07	72.37	617.44	18.87					
118.0	10.98	64.30	123.37	6.76	26.80	1.84	68.56	601.12	18.99					
120.0	11.05	72.57	119.93	6.93	27.00	1.74	65.64	584.47	19.06					
122.0	10.27	68.82	118.82	7.10	27.20	1.59	51.10	573.20	19.18					
124.0	8.64	64.06	89.13	7.26	27.40	1.38	35.34	560.33	19.28					
126.0	8.49	49.82	70.09	7.40	27.60	1.65	28.35	628.81	19.37					
128.0	10.09	60.09	101.73	7.58	27.80	1.62	33.48	618.77	19.48					
130.0	10.06	64.17	97.28	7.75	28.00	1.99	25.95	599.56	19.59					
132.0	10.25	74.05	100.74	7.90	28.20	7.76	35.67	179.26	19.67					
134.0	7.66	66.29	99.63	8.05	28.40	3.27	91.25	364.74	19.82					
136.0	8.86	60.02	79.92	8.25	28.60	1.55	48.66	734.15	19.93					
138.0	9.97	66.67	74.04	8.42	28.80	5.02	29.53	444.11	20.04					
140.0	10.42	65.98	109.29	8.63	29.00	5.53	63.78	309.30	20.19					
142.0	11.56	70.36	111.44	8.79	29.20	2.09	64.32	712.62	20.36					
144.0	15.54	50.56	62.88	9.01	29.40	1.85	61.26	609.44	20.45					
146.0	13.02	54.09	43.57	9.20	29.60	1.83	54.06	623.43	20.56					
148.0	12.00	65.88	77.25	9.39	29.80	1.75	58.53	576.31	20.70					
150.0	14.08	70.08	78.42	9.55	30.00	1.94	39.66	666.72	20.80					

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi

CANTIERE Polisportivo Ponte Nuovo - Ravenna

CPT N° CPTU 02 PROF. FALDA (m da p.c.) 1.00

DATA 08/04/10 PREFORO (m da p.c.)


TIPO PUNTA

piezocono G1 - CPL2IN

COMMESSA 8042/10 C. SITO N°: 573/10 del 28/04/10

PLANIMETRIA

Località: Polisportivo Ponte Nuovo - Ravenna

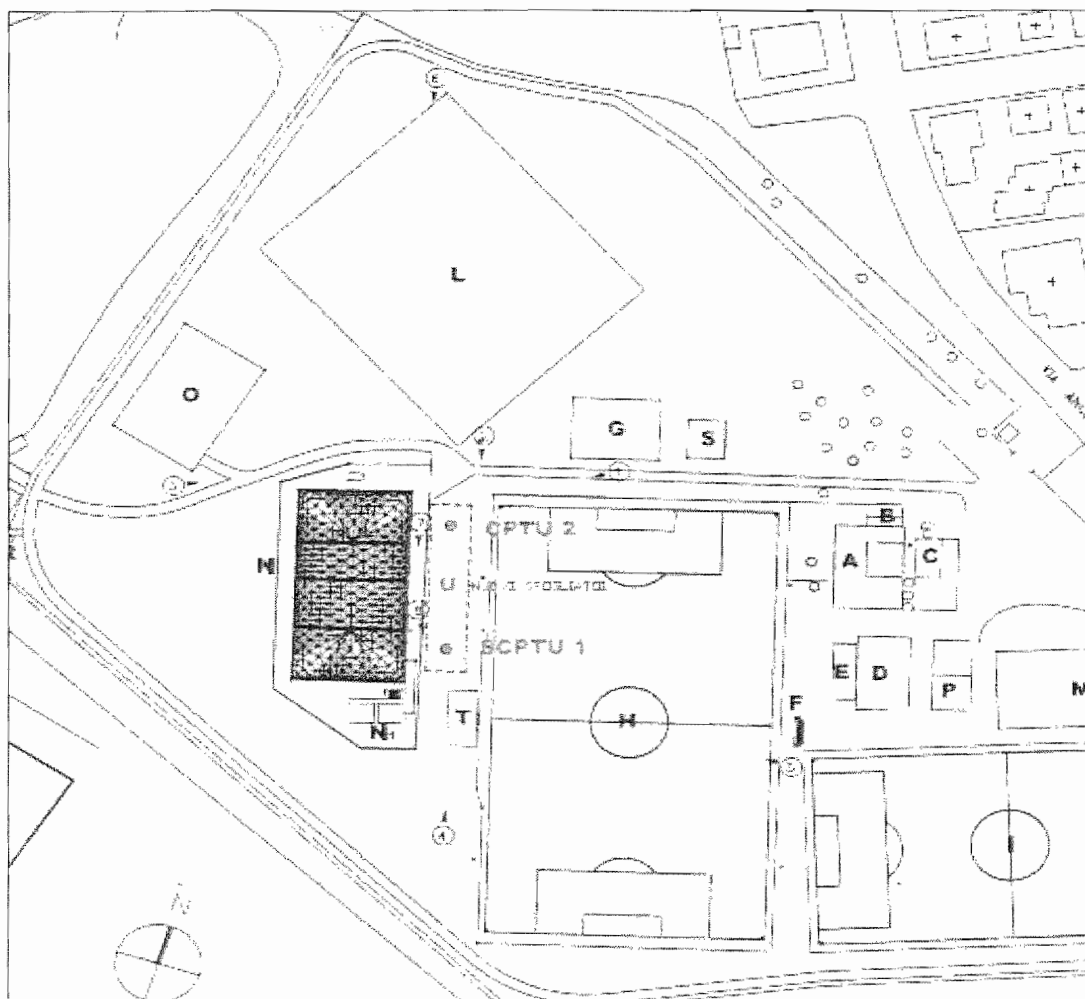

elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P IVA e Codice Fiscale n. 00174600387

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001

elletipi

Laboratorio per Monitoraggio Infrastrutture e Trasporti (L.M.I.T.) - Ingegneria Geotecnica e Geodinamica - Sede Operativa in Ferrara

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi
CANTIERE Polisportivo Ponte Nuovo - Ravenna

CPT N° CPTU 02 PROF. FALDA (m da p.c.) 1.00
DATA 08/04/10 PREFORO (m da p.c.) 0.00 TIPO PUNTA piezocono G1 - CPL2IN
COMMESSA 8042/10

Prof. (m)		Prof. media	Pot. strato	Litologia	q _c media	γ'	σ' vo	C _u media	Φ' (1)	Φ (2)
da	a	(m)	(m)		(kg/cm ²)	(t/m ³)	(kg/cm ²)	(kg/cm ²)	(gradi)	(gradi)
0.00	- 0.06	0.03	0.06	sabbie limose	17.867808	1.3-1.8	0.01	-	>45	50
0.06	- 0.14	0.10	0.08	limi e limi sabbiosi	21.4	1.3-1.8	0.03	1.4	>45	44
0.14	- 0.22	0.18	0.06	limi argillosi e argille limose	21.6	1.3-1.8	0.04	1.4	-	-
0.22	- 0.24	0.23	0.02	argille	20.8	0.7-1.3	0.04	1.4	-	-
0.24	- 0.28	0.26	0.04	limi argillosi e argille limose	27.4	1.3-1.8	0.05	1.8	-	-
0.28	- 0.34	0.31	0.06	limi e limi sabbiosi	30.7	1.3-1.8	0.06	2.0	43	40
0.34	- 0.36	0.35	0.02	argille	19.1	0.7-1.3	0.06	1.3	-	-
0.36	- 0.42	0.39	0.06	limi argillosi e argille limose	20.8	1.3-1.8	0.07	1.4	-	-
0.42	- 0.46	0.44	0.04	argille	20.2	0.7-1.3	0.08	1.3	-	-
0.46	- 1.04	0.75	0.58	torbe	14.4	0.4-0.8	0.16	0.9	-	-
1.04	- 1.46	1.25	0.42	argille	6.3	0.4-0.8	0.23	0.4	-	-
1.46	- 1.50	1.48	0.04	limi argillosi e argille limose	5.3	0.8-1.1	0.22	0.3	-	-
1.50	- 1.54	1.52	0.04	limi e limi sabbiosi	5.9	0.8-1.1	0.22	0.4	<32	25
1.54	- 1.56	1.55	0.02	limi argillosi e argille limose	5.2	0.8-1.1	0.23	0.3	-	-
1.56	- 1.80	1.68	0.24	limi e limi sabbiosi	10.3	0.8-1.1	0.26	0.7	<32	27
1.80	- 2.28	2.04	0.48	limi argillosi e argille limose	7.7	0.8-1.1	0.33	0.5	-	-
2.28	- 2.38	2.33	0.10	argille	9.0	0.4-0.8	0.32	0.6	-	-
2.38	- 2.50	2.44	0.12	torbe	7.8	0.4-0.8	0.33	0.5	-	-
2.50	- 2.58	2.54	0.08	argille	7.7	0.4-0.8	0.33	0.5	-	-
2.58	- 2.72	2.65	0.14	torbe	6.0	0.4-0.8	0.35	0.4	-	-
2.72	- 4.18	3.45	1.46	argille	4.1	0.4-0.8	0.53	0.2	-	-
4.18	- 4.34	4.26	0.16	limi argillosi e argille limose	3.4	0.8-1.1	0.49	0.2	-	-
4.34	- 4.40	4.37	0.06	argille	3.2	0.4-0.8	0.49	0.2	-	-
4.40	- 4.42	4.41	0.02	limi argillosi e argille limose	3.8	0.8-1.1	0.49	0.2	-	-
4.42	- 4.50	4.46	0.08	argille	3.4	0.4-0.8	0.50	0.2	-	-
4.50	- 4.60	4.55	0.10	limi argillosi e argille limose	3.6	0.8-1.1	0.51	0.2	-	-
4.60	- 4.74	4.67	0.14	argille	2.7	0.4-0.8	0.52	0.1	-	-
4.74	- 4.86	4.80	0.12	limi argillosi e argille limose	3.0	0.8-1.1	0.53	0.1	-	-
4.86	- 5.10	4.98	0.24	argille	2.7	0.4-0.8	0.56	0.1	-	-
5.10	- 5.14	5.12	0.04	limi argillosi e argille limose	2.9	0.8-1.1	0.56	0.1	-	-
5.14	- 5.94	5.54	0.80	argille	3.0	0.4-0.8	0.66	0.1	-	-
5.94	- 5.98	5.96	0.04	limi argillosi e argille limose	3.9	0.8-1.1	0.63	0.2	-	-
5.98	- 6.02	6.00	0.04	limi e limi sabbiosi	9.6	0.8-1.1	0.63	0.6	<32	20
6.02	- 6.10	6.06	0.08	sabbie limose	14.3	0.8-1.1	0.64	-	<32	22
6.10	- 6.16	6.13	0.06	limi e limi sabbiosi	12.5	0.8-1.1	0.65	0.8	<32	21
6.16	- 6.26	6.21	0.10	sabbie limose	26.3	0.8-1.1	0.66	-	<32	25
6.26	- 6.42	6.34	0.16	sabbie	45.2	0.8-1.1	0.68	-	<32	28
6.42	- 6.50	6.46	0.08	sabbie limose	40.8	0.8-1.1	0.69	-	<32	27
6.50	- 6.78	6.64	0.28	sabbie	44.0	0.8-1.1	0.73	-	<32	28
6.78	- 6.86	6.82	0.08	sabbie limose	39.6	0.8-1.1	0.73	-	<32	27
6.86	- 7.56	7.21	0.70	sabbie	74.9	0.8-1.1	0.83	-	33	30
7.56	- 7.66	7.61	0.10	sabbie limose	56.9	0.8-1.1	0.82	-	<32	28
7.66	- 9.04	8.35	1.38	sabbie	64.5	0.8-1.1	1.03	-	<32	28
9.04	- 9.08	9.06	0.04	sabbie limose	55.2	0.8-1.1	0.97	-	<32	27
9.08	- 19.92	14.50	10.84	sabbie	113.5	0.8-1.1	2.72	-	<32	29
19.92	- 19.94	19.93	0.02	sabbie limose	54.5	0.8-1.1	2.19	-	<32	23
19.94	- 19.98	19.96	0.04	limi e limi sabbiosi	28.8	0.8-1.1	2.19	1.6	<32	19
19.98	- 20.00	19.99	0.02	argille	16.9	0.4-0.8	2.19	0.9	-	-
20.00	- 20.06	20.04	0.08	torbe	11.1	0.4-0.8	2.20	0.5	-	-
20.06	- 20.10	20.09	0.02	argille	15.0	0.4-0.8	2.20	0.7	-	-
20.10	- 20.16	20.14	0.06	sabbie limose	34.5	0.8-1.1	2.21	-	<32	20
20.16	- 20.20	20.19	0.02	limi e limi sabbiosi	19.3	0.8-1.1	2.21	1.0	<32	17
20.20	- 20.24	20.22	0.04	limi argillosi e argille limose	18.1	0.8-1.1	2.22	0.9	-	-
20.24	- 20.26	20.25	0.02	argille	17.1	0.4-0.8	2.22	0.9	-	-

CPT N°	CPTU 02	PROF. FALDA (m da p.c.)	1.00		
DATA	08/04/10	PREFORO (m da p.c.)	0.00	TIPO PUNTA	piezocono G1 - CPL2IN
COMMESSA	8042/10				

Prof. (m)		Prof. media	Pot. strato	Litologia	q _s media	γ'	σ' vo	C _s media	Φ' (1)	Φ (2)	
da	a	(m)	(m)		(kg/cm ²)	(t/m ³)	(kg/cm ²)	(kg/cm ²)	(gradi)	(gradi)	
20.26	-	20.30	20.26	0.04	limi argillosi e argille limose	19.1	0.6-1.1	2.22	1.0	-	-
20.30	-	20.34	20.32	0.04	argille	16.1	0.4-0.6	2.23	0.8	-	-
20.34	-	20.38	20.36	0.04	limi argillosi e argille limose	15.7	0.8-1.1	2.23	0.8	-	-
20.38	-	20.50	20.44	0.12	argille	9.9	0.4-0.6	2.25	0.4	-	-
20.50	-	20.52	20.51	0.02	limi argillosi e argille limose	9.2	0.8-1.1	2.24	0.3	-	-
20.52	-	20.84	20.68	0.32	limi e limi sabbiosi	10.1	0.8-1.1	2.29	0.4	<32	13
20.84	-	20.86	20.85	0.02	sabbie limose	13.2	0.6-1.1	2.28	-	<32	15
20.86	-	21.08	20.97	0.22	limi e limi sabbiosi	15.4	0.8-1.1	2.32	0.7	<32	15
21.08	-	21.16	21.12	0.08	limi argillosi e argille limose	12.4	0.6-1.1	2.32	0.5	-	-
21.16	-	21.40	21.28	0.24	limi e limi sabbiosi	14.1	0.8-1.1	2.35	0.6	<32	15
21.40	-	21.48	21.44	0.08	sabbie limose	21.0	0.8-1.1	2.35	-	<32	17
21.48	-	21.64	21.56	0.16	limi e limi sabbiosi	20.4	0.8-1.1	2.38	1.1	<32	17
21.64	-	21.72	21.68	0.08	sabbie limose	29.1	0.8-1.1	2.38	-	<32	19
21.72	-	21.96	21.84	0.24	limi e limi sabbiosi	18.2	0.6-1.1	2.42	0.9	<32	16
21.96	-	21.98	21.97	0.02	sabbie limose	16.4	0.8-1.1	2.41	-	<32	15
21.98	-	22.14	22.06	0.16	limi e limi sabbiosi	20.0	0.6-1.1	2.43	1.0	<32	17
22.14	-	22.32	22.23	0.18	sabbie limose	45.9	0.8-1.1	2.45	-	<32	21
22.32	-	22.42	22.37	0.10	sabbie	71.7	0.8-1.1	2.46	-	<32	24
22.42	-	22.46	22.44	0.04	sabbie limose	34.5	0.8-1.1	2.46	-	<32	20
22.46	-	22.48	22.47	0.02	limi e limi sabbiosi	27.1	0.6-1.1	2.46	1.5	<32	18
22.48	-	22.50	22.49	0.02	limi argillosi e argille limose	24.2	0.6-1.1	2.46	1.3	-	-
22.50	-	22.52	22.51	0.02	argille	24.9	0.4-0.6	2.47	1.4	-	-
22.52	-	22.54	22.53	0.02	limi argillosi e argille limose	29.7	0.8-1.1	2.47	1.7	-	-
22.54	-	22.56	22.55	0.02	limi e limi sabbiosi	36.4	0.8-1.1	2.47	2.1	<32	20
22.56	-	22.64	22.60	0.08	sabbie limose	51.6	0.8-1.1	2.48	-	<32	22
22.64	-	22.84	22.74	0.20	sabbie	61.9	0.8-1.1	2.51	-	<32	23
22.84	-	22.90	22.87	0.06	sabbie limose	42.2	0.8-1.1	2.51	-	<32	21
22.90	-	22.92	22.91	0.02	limi e limi sabbiosi	23.8	0.8-1.1	2.51	1.3	<32	17
22.92	-	22.94	22.93	0.02	limi argillosi e argille limose	17.5	0.8-1.1	2.51	0.9	-	-
22.94	-	22.96	22.95	0.02	argille	15.1	0.4-0.6	2.52	0.7	-	-
22.96	-	23.04	23.00	0.08	limi argillosi e argille limose	15.8	0.6-1.1	2.53	0.7	-	-
23.04	-	23.12	23.08	0.08	limi e limi sabbiosi	14.2	0.6-1.1	2.54	0.6	<32	14
23.12	-	23.32	23.22	0.20	limi argillosi e argille limose	12.9	0.6-1.1	2.56	0.5	-	-
23.32	-	23.38	23.35	0.06	limi e limi sabbiosi	13.5	0.8-1.1	2.56	0.6	<32	14
23.38	-	23.52	23.45	0.14	limi argillosi e argille limose	12.1	0.6-1.1	2.58	0.5	-	-
23.52	-	24.10	23.81	0.58	limi e limi sabbiosi	13.9	0.8-1.1	2.67	0.6	<32	14
24.10	-	24.32	24.21	0.22	limi argillosi e argille limose	17.5	0.6-1.1	2.68	0.8	-	-
24.32	-	24.46	24.39	0.14	argille	13.6	0.4-0.6	2.66	0.6	-	-
24.46	-	24.54	24.50	0.08	limi argillosi e argille limose	11.8	0.6-1.1	2.69	0.5	-	-
24.54	-	24.66	24.60	0.12	limi e limi sabbiosi	11.7	0.8-1.1	2.71	0.4	<32	13
24.66	-	24.76	24.71	0.10	sabbie limose	17.4	0.8-1.1	2.72	-	<32	15
24.76	-	24.82	24.79	0.06	limi e limi sabbiosi	16.9	0.6-1.1	2.72	0.8	<32	15
24.82	-	24.94	24.88	0.12	limi argillosi e argille limose	17.0	0.8-1.1	2.74	0.8	-	-
24.94	-	24.96	24.95	0.02	limi e limi sabbiosi	16.9	0.8-1.1	2.73	0.9	<32	16
24.96	-	25.28	25.12	0.32	limi argillosi e argille limose	20.9	0.8-1.1	2.79	1.0	-	-
25.28	-	25.30	25.29	0.02	limi e limi sabbiosi	23.6	0.8-1.1	2.77	1.2	<32	17
25.30	-	25.38	25.34	0.06	limi argillosi e argille limose	22.0	0.6-1.1	2.78	1.1	-	-
25.38	-	25.42	25.40	0.04	argille	19.7	0.4-0.6	2.79	1.0	-	-
25.42	-	25.48	25.45	0.06	limi argillosi e argille limose	20.9	0.6-1.1	2.79	1.0	-	-
25.48	-	25.50	25.49	0.02	limi e limi sabbiosi	21.8	0.6-1.1	2.79	1.1	<32	16
25.50	-	25.64	25.57	0.14	limi argillosi e argille limose	19.4	0.6-1.1	2.82	0.9	-	-
25.64	-	25.92	25.78	0.28	limi e limi sabbiosi	19.6	0.8-1.1	2.85	1.0	<32	16
25.92	-	25.94	25.93	0.02	sabbie limose	24.3	0.6-1.1	2.84	-	<32	17
25.94	-	26.20	26.07	0.26	limi e limi sabbiosi	21.7	0.6-1.1	2.88	1.1	<32	16

elletipi s.r.l.

Sede operativa ed ammi.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P.IVA e Codice Fiscale n. 00174600387

Laboratorio aut. dal Ministero Infrastrutture e Trasporti P.C.S. L. 11. PF. S.T.C. in base al D.P.R. n. 384/01 art. 59 circ. n. 45/94/Dev. n. 53/95 del 06/05/2001

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi
CANTIERE Polisportivo Ponte Nuovo - Ravenna

CPT N° CPTU 02 PROF. FALDA (m da p.c.) 1.00
DATA 08/04/10 PREFORO (m da p.c.) 0.00 TIPO PUNTA piezocono G1 - CPL2IN
COMMESSA 8042/10

Prof. (m) da a	Prof. media (m)	Pot. strato (m)	Litologia	q _c media (kg/cm ²)	γ' (t/m ³)	σ' _{vs} (kg/cm ²)	C _u media (kg/cm ²)	Φ' (1) (gradi)	Φ (2) (gradi)
26.20 - 27.16	26.68	0.96	limi argillosi e argille limose	18.7	0.8-1.1	3.03	0.9	-	-
27.16 - 27.28	27.22	0.12	limi e limi sabbiosi	14.7	0.8-1.1	3.00	0.6	<32	14
27.28 - 27.38	27.33	0.10	limi argillosi e argille limose	13.0	0.8-1.1	3.01	0.5	-	-
27.38 - 27.96	27.67	0.58	limi e limi sabbiosi	15.7	0.8-1.1	3.10	0.7	<32	14
27.96 - 28.00	27.98	0.04	sabbie limose	37.3	0.8-1.1	3.07	-	<32	19
28.00 - 28.24	28.12	0.24	sabbie	74.3	0.8-1.1	3.11	-	<32	23
28.24 - 28.26	28.25	0.02	sabbie limose	40.1	0.8-1.1	3.10	-	<32	19
28.26 - 28.28	28.27	0.02	limi e limi sabbiosi	31.3	0.8-1.1	3.11	1.7	<32	18
28.28 - 28.30	28.29	0.02	limi argillosi e argille limose	26.7	0.8-1.1	3.11	1.4	-	-
28.30 - 28.32	28.31	0.02	argille	22.8	0.4-0.8	3.11	1.1	-	-
28.32 - 28.38	28.35	0.06	torbe	18.1	0.4-0.8	3.12	0.8	-	-
28.38 - 28.42	28.40	0.04	argille	15.9	0.4-0.8	3.12	0.7	-	-
28.42 - 28.48	28.45	0.06	limi argillosi e argille limose	15.5	0.8-1.1	3.13	0.6	-	-
28.48 - 28.50	28.49	0.02	limi e limi sabbiosi	15.2	0.8-1.1	3.13	0.6	<32	14
28.50 - 28.52	28.51	0.02	limi argillosi e argille limose	14.5	0.8-1.1	3.13	0.6	-	-
28.52 - 28.64	28.58	0.12	limi e limi sabbiosi	15.5	0.8-1.1	3.15	0.6	<32	14
28.64 - 28.68	28.66	0.04	sabbie limose	30.1	0.8-1.1	3.15	-	<32	17
28.68 - 28.90	28.79	0.22	sabbie	69.4	0.8-1.1	3.18	-	<32	22
28.90 - 28.94	28.92	0.04	sabbie limose	46.0	0.8-1.1	3.18	-	<32	20
28.94 - 28.96	28.95	0.02	limi e limi sabbiosi	35.9	0.8-1.1	3.18	2.0	<32	18
28.96 - 28.98	28.97	0.02	limi argillosi e argille limose	27.4	0.8-1.1	3.18	1.4	-	-
28.98 - 29.02	29.00	0.04	torbe	20.7	0.4-0.8	3.18	1.0	-	-
29.02 - 29.04	29.03	0.02	argille	19.9	0.4-0.8	3.18	0.9	-	-
29.04 - 29.08	29.06	0.04	limi argillosi e argille limose	20.0	0.8-1.1	3.19	0.9	-	-
29.08 - 29.24	29.16	0.16	limi e limi sabbiosi	20.6	0.8-1.1	3.21	1.0	<32	15
29.24 - 29.44	29.34	0.20	limi argillosi e argille limose	17.7	0.8-1.1	3.24	0.8	-	-
29.44 - 29.50	29.47	0.06	limi e limi sabbiosi	17.6	0.8-1.1	3.24	0.8	<32	14
29.50 - 29.56	29.53	0.06	limi argillosi e argille limose	18.0	0.8-1.1	3.25	0.8	-	-
29.56 - 29.60	29.58	0.04	limi e limi sabbiosi	19.1	0.8-1.1	3.25	0.9	<32	15
29.60 - 29.76	29.68	0.16	limi argillosi e argille limose	17.1	0.8-1.1	3.27	0.7	-	-
29.76 - 30.62	30.19	0.86	limi e limi sabbiosi	21.8	0.8-1.1	3.40	1.0	<32	15
30.62 - 30.86	30.74	0.24	sabbie limose	51.0	0.8-1.1	3.40	-	<32	20
30.86 - 30.90	30.88	0.04	sabbie	77.9	0.8-1.1	3.39	-	<32	22
30.90 - 30.94	30.92	0.04	sabbie limose	68.2	0.8-1.1	3.40	-	<32	22

Site: 07031

Locality: RAVENNA

Test Location: 5.cpt


Date: 06/02/2007

Abs. quota [cm]: 0

Prehole [cm]: 0

Hydrostatic Line [cm]: 0

Page 1/1

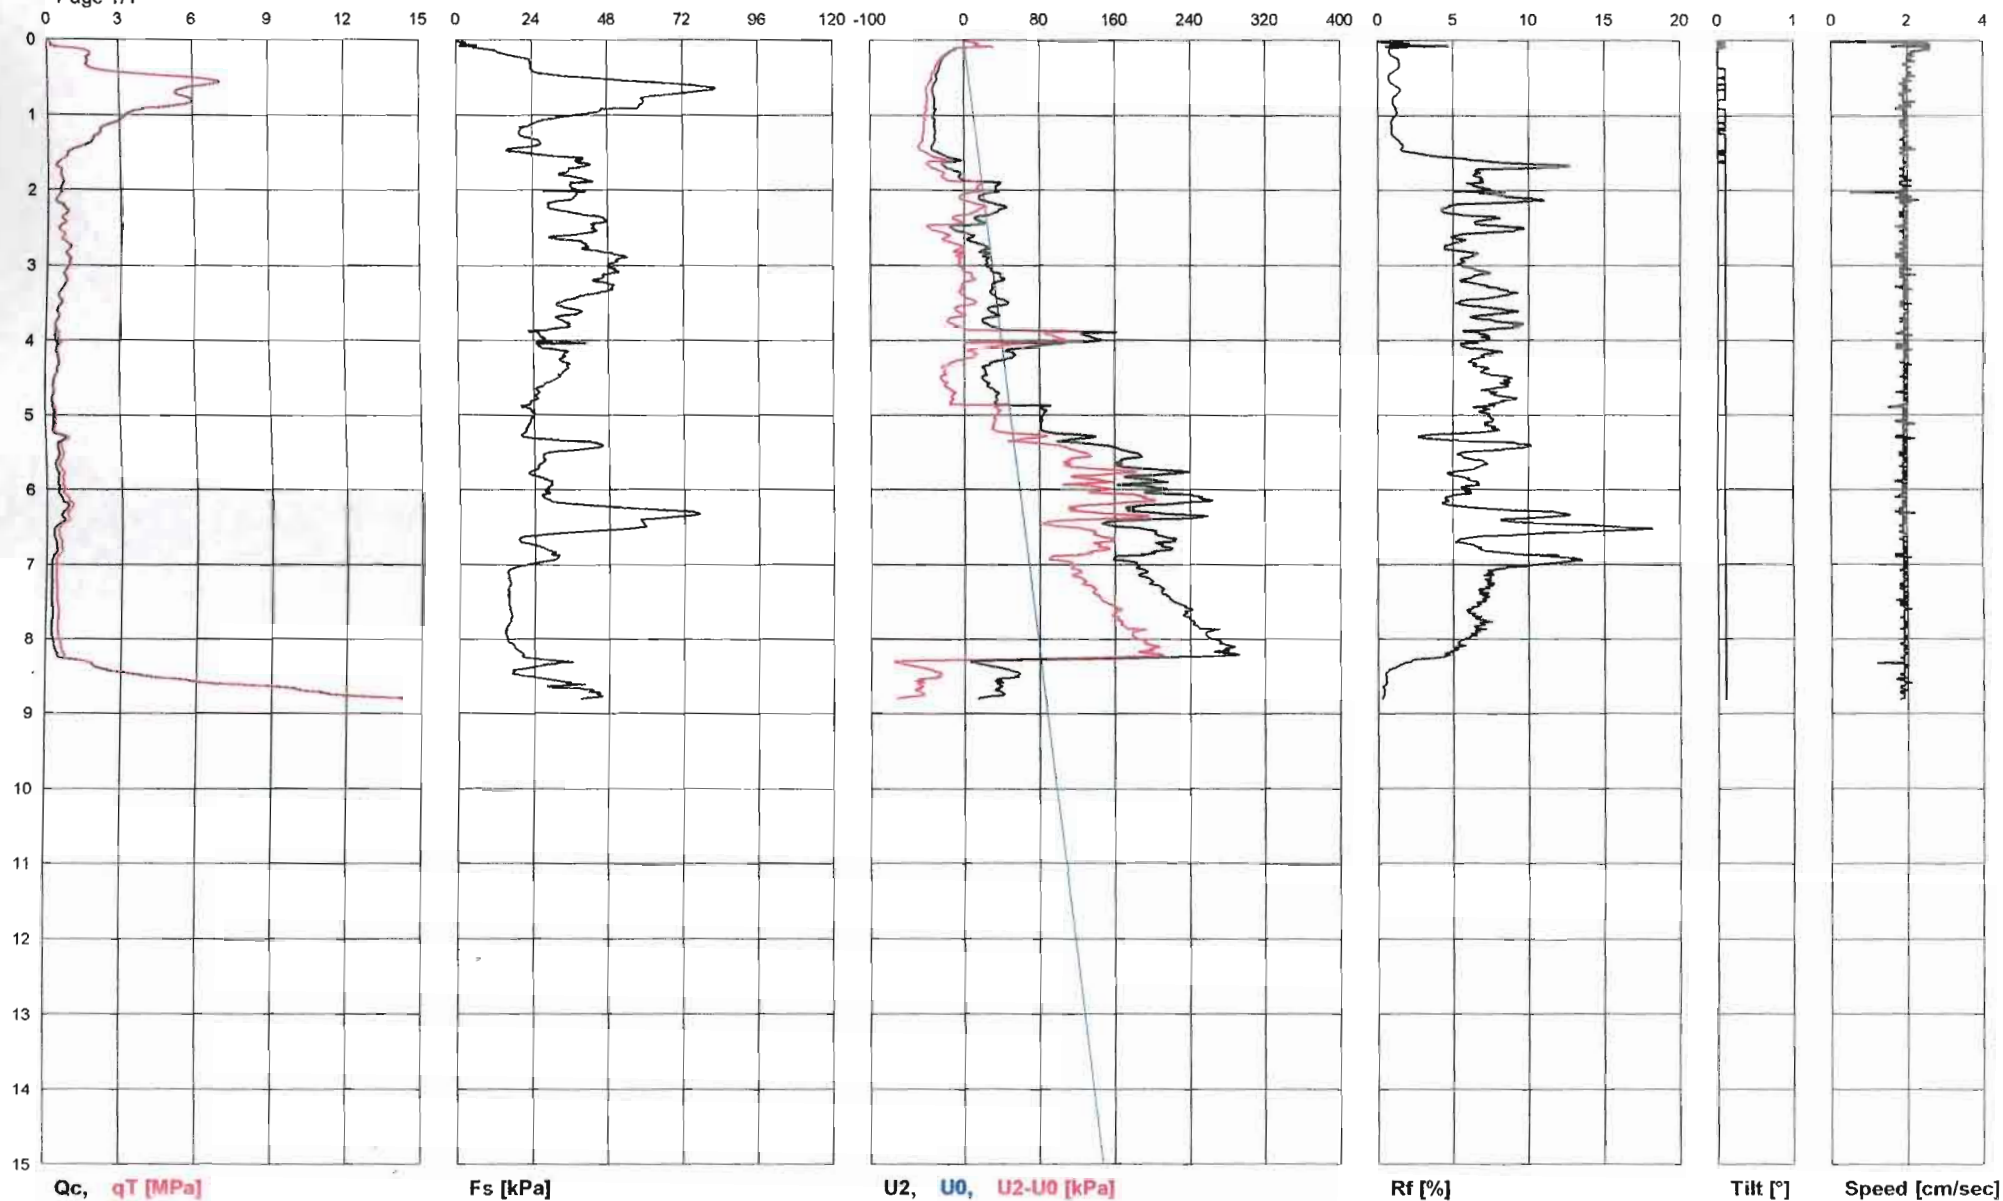

TGSW03 for Pagani Geotechnical Equipment acquisition systems

Site: 07031

Locality: RAVENNA

Test Location: 4.cpt


Date: 06/02/2007

Abs. quota [cm]: 0

Prehole [cm]: 0

Hydrostatic Line [cm]: 0

Page 1/1

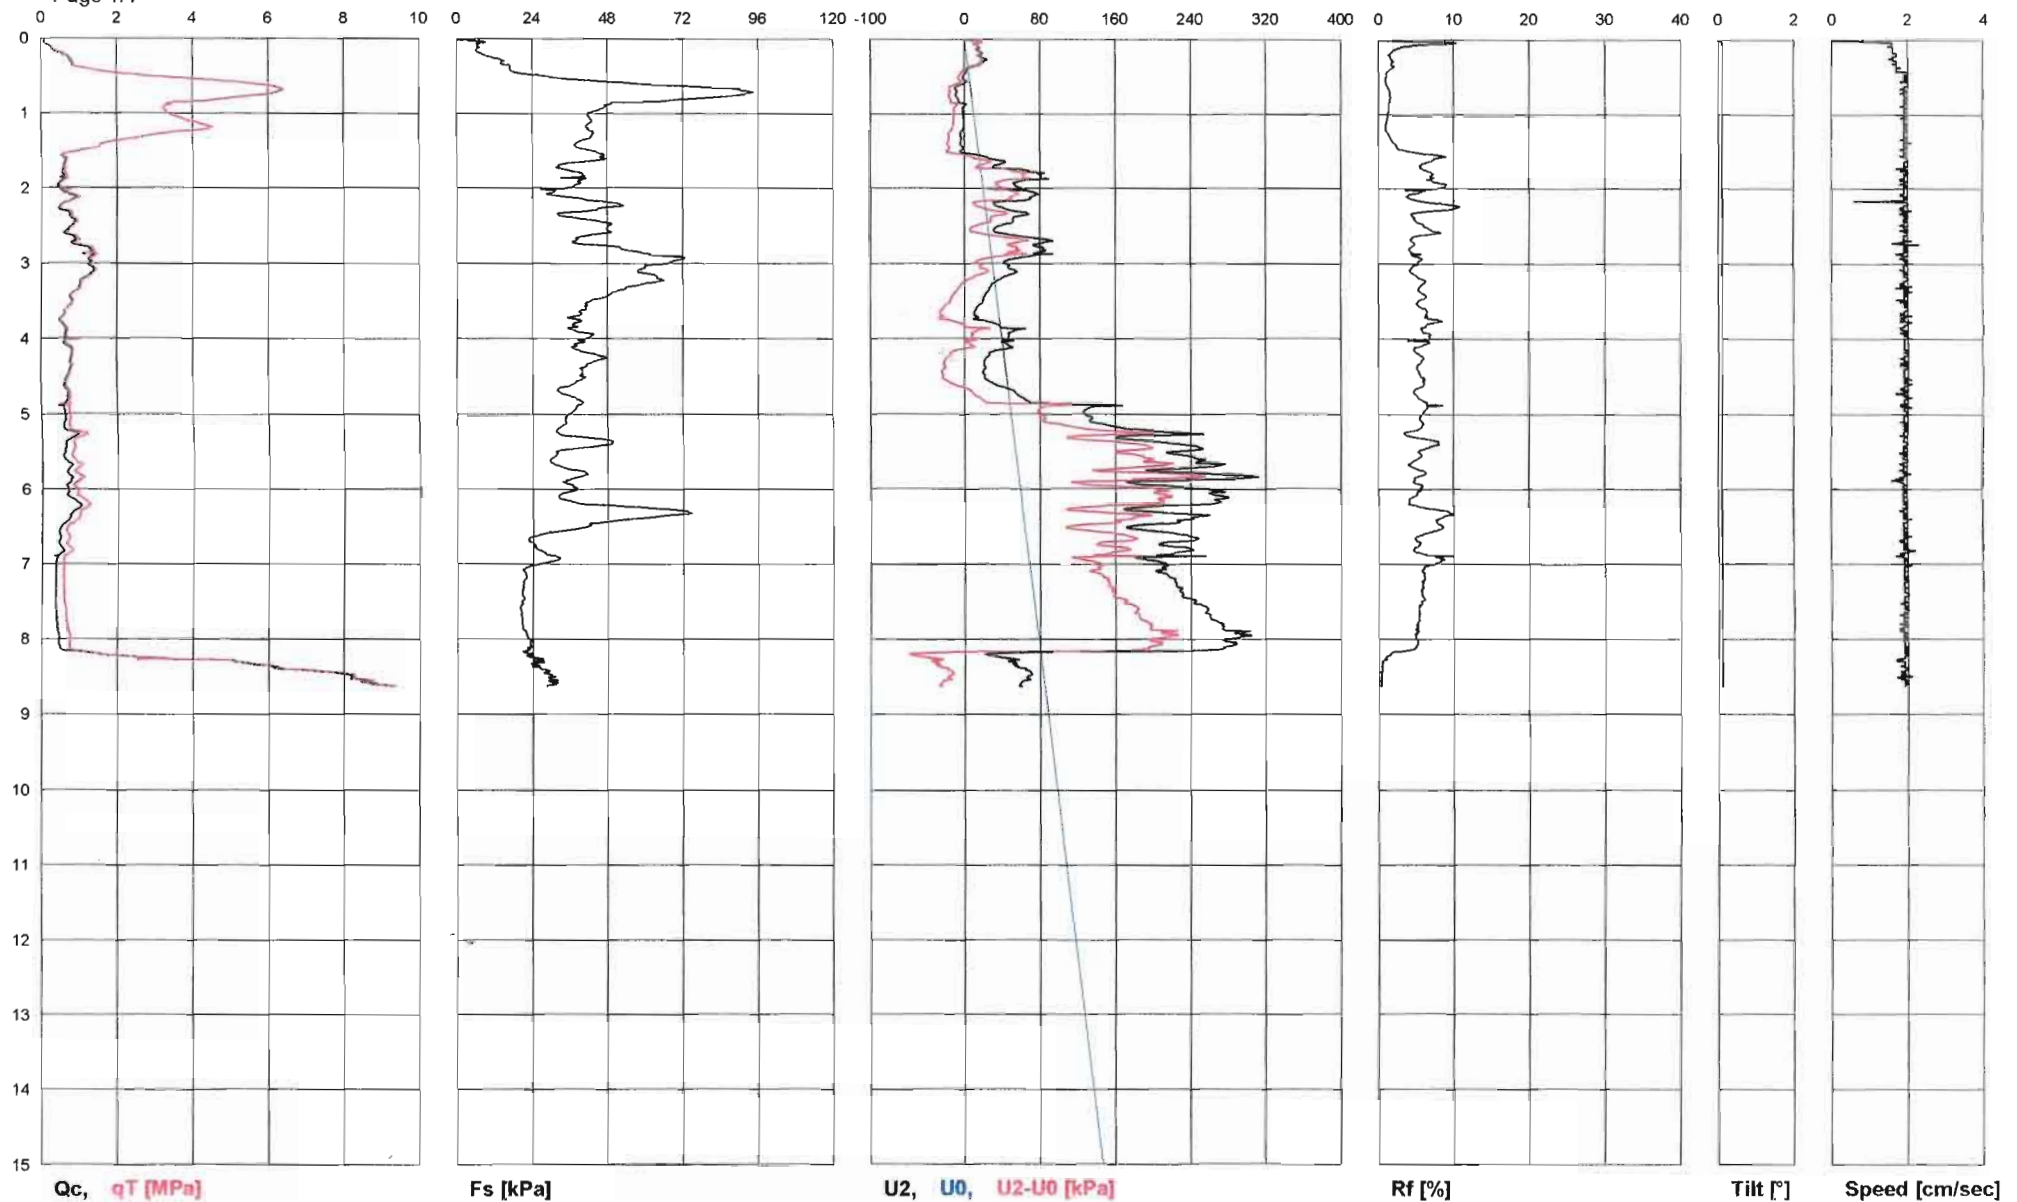

TGSW03 for Pagani Geotechnical Equipment acquisition systems

Site: 07031

Locality: RAVENNA

Test Location: 1.cpt


Date: 05/02/2007

Abs. quota [cm]: 0

Prehole [cm]: 0

Hydrostatic Line [cm]: 0

Page 1/1

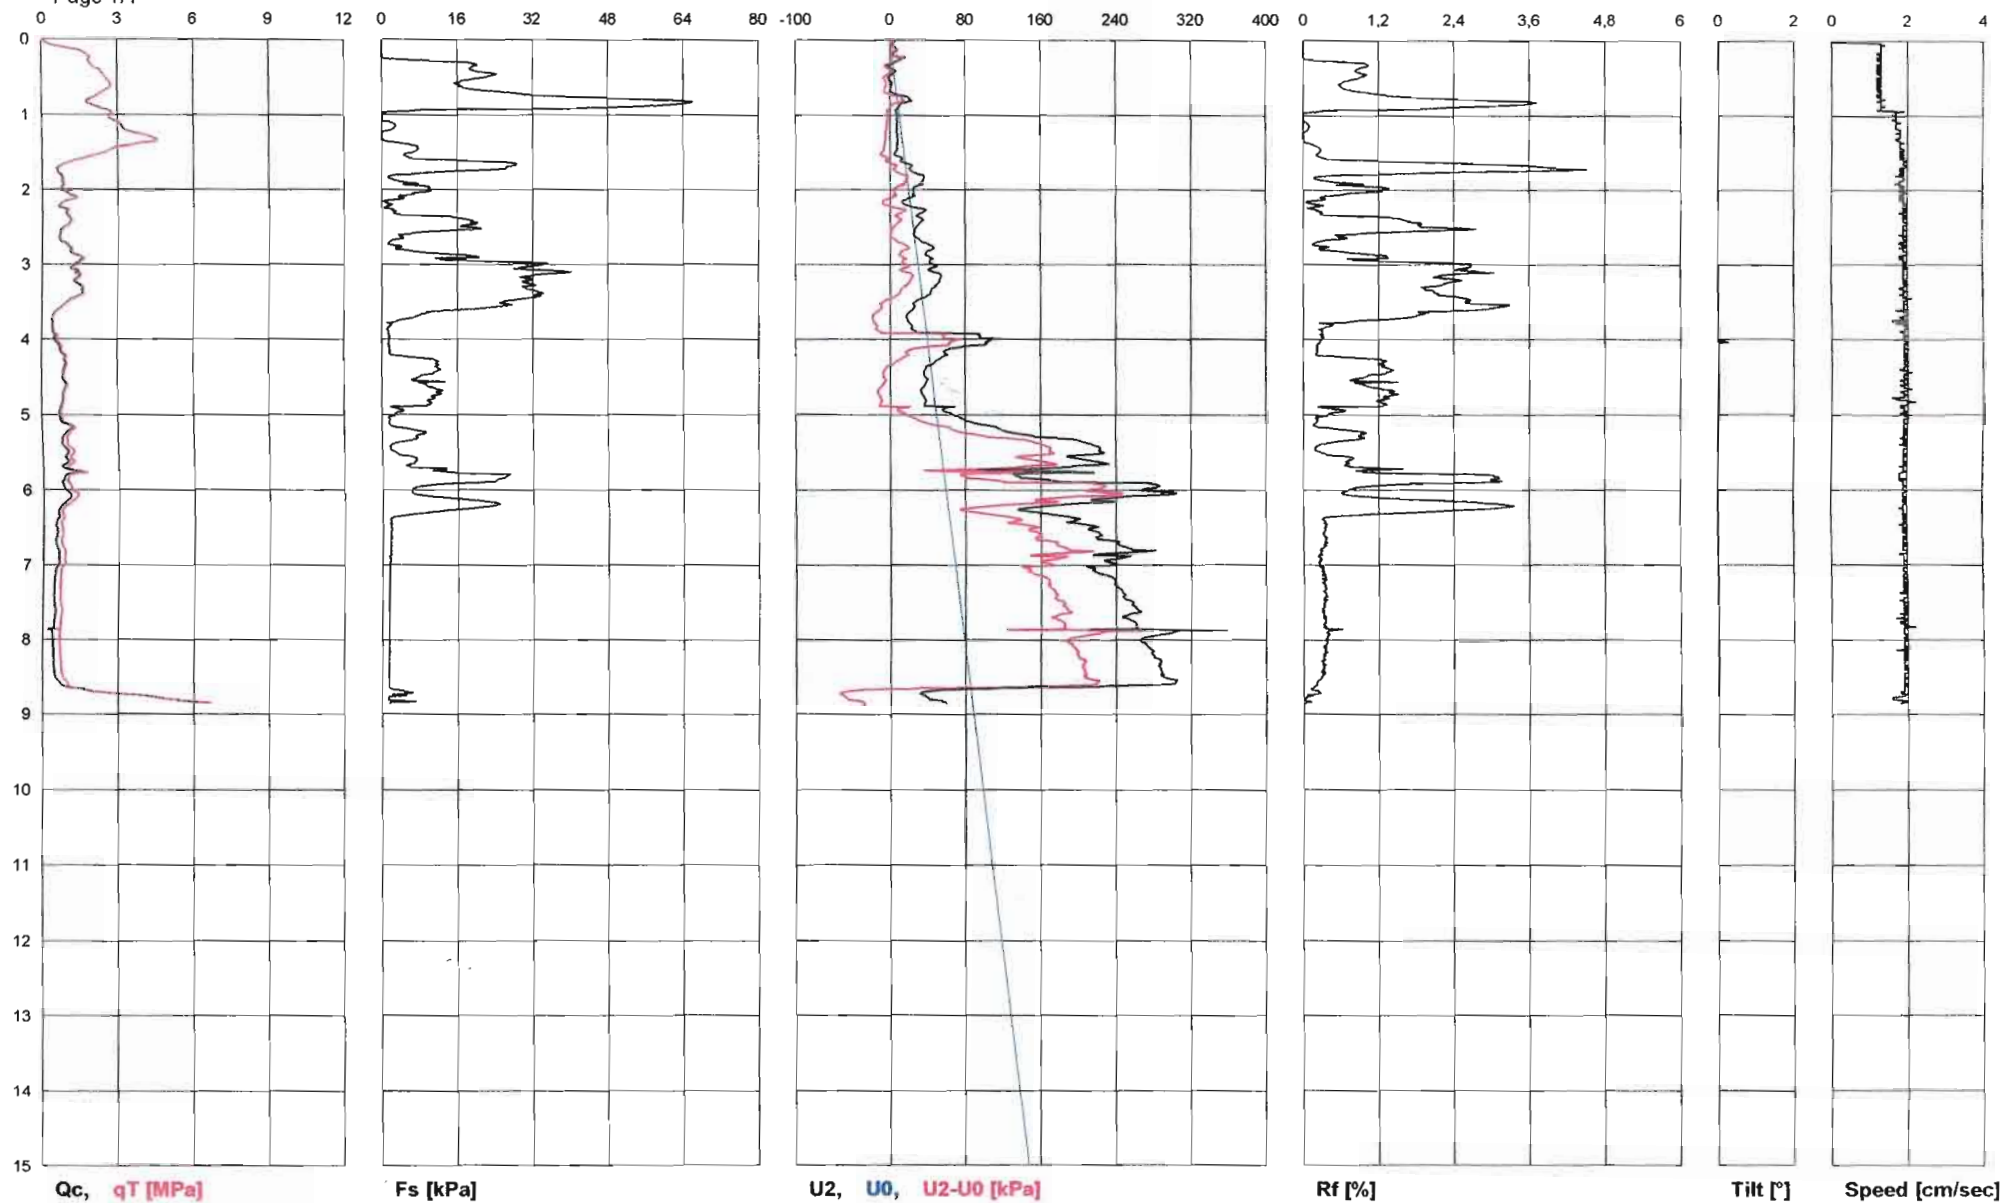

TGSW03 for Pagani Geotechnical Equipment acquisition systems

Site: 07031

Locality: RAVENNA

Test Location: 6.cpt


Date: 06/02/2007

Abs. quota [cm]: 0

Prehole [cm]: 0

Hydrostatic Line [cm]: 0

Page 1/1

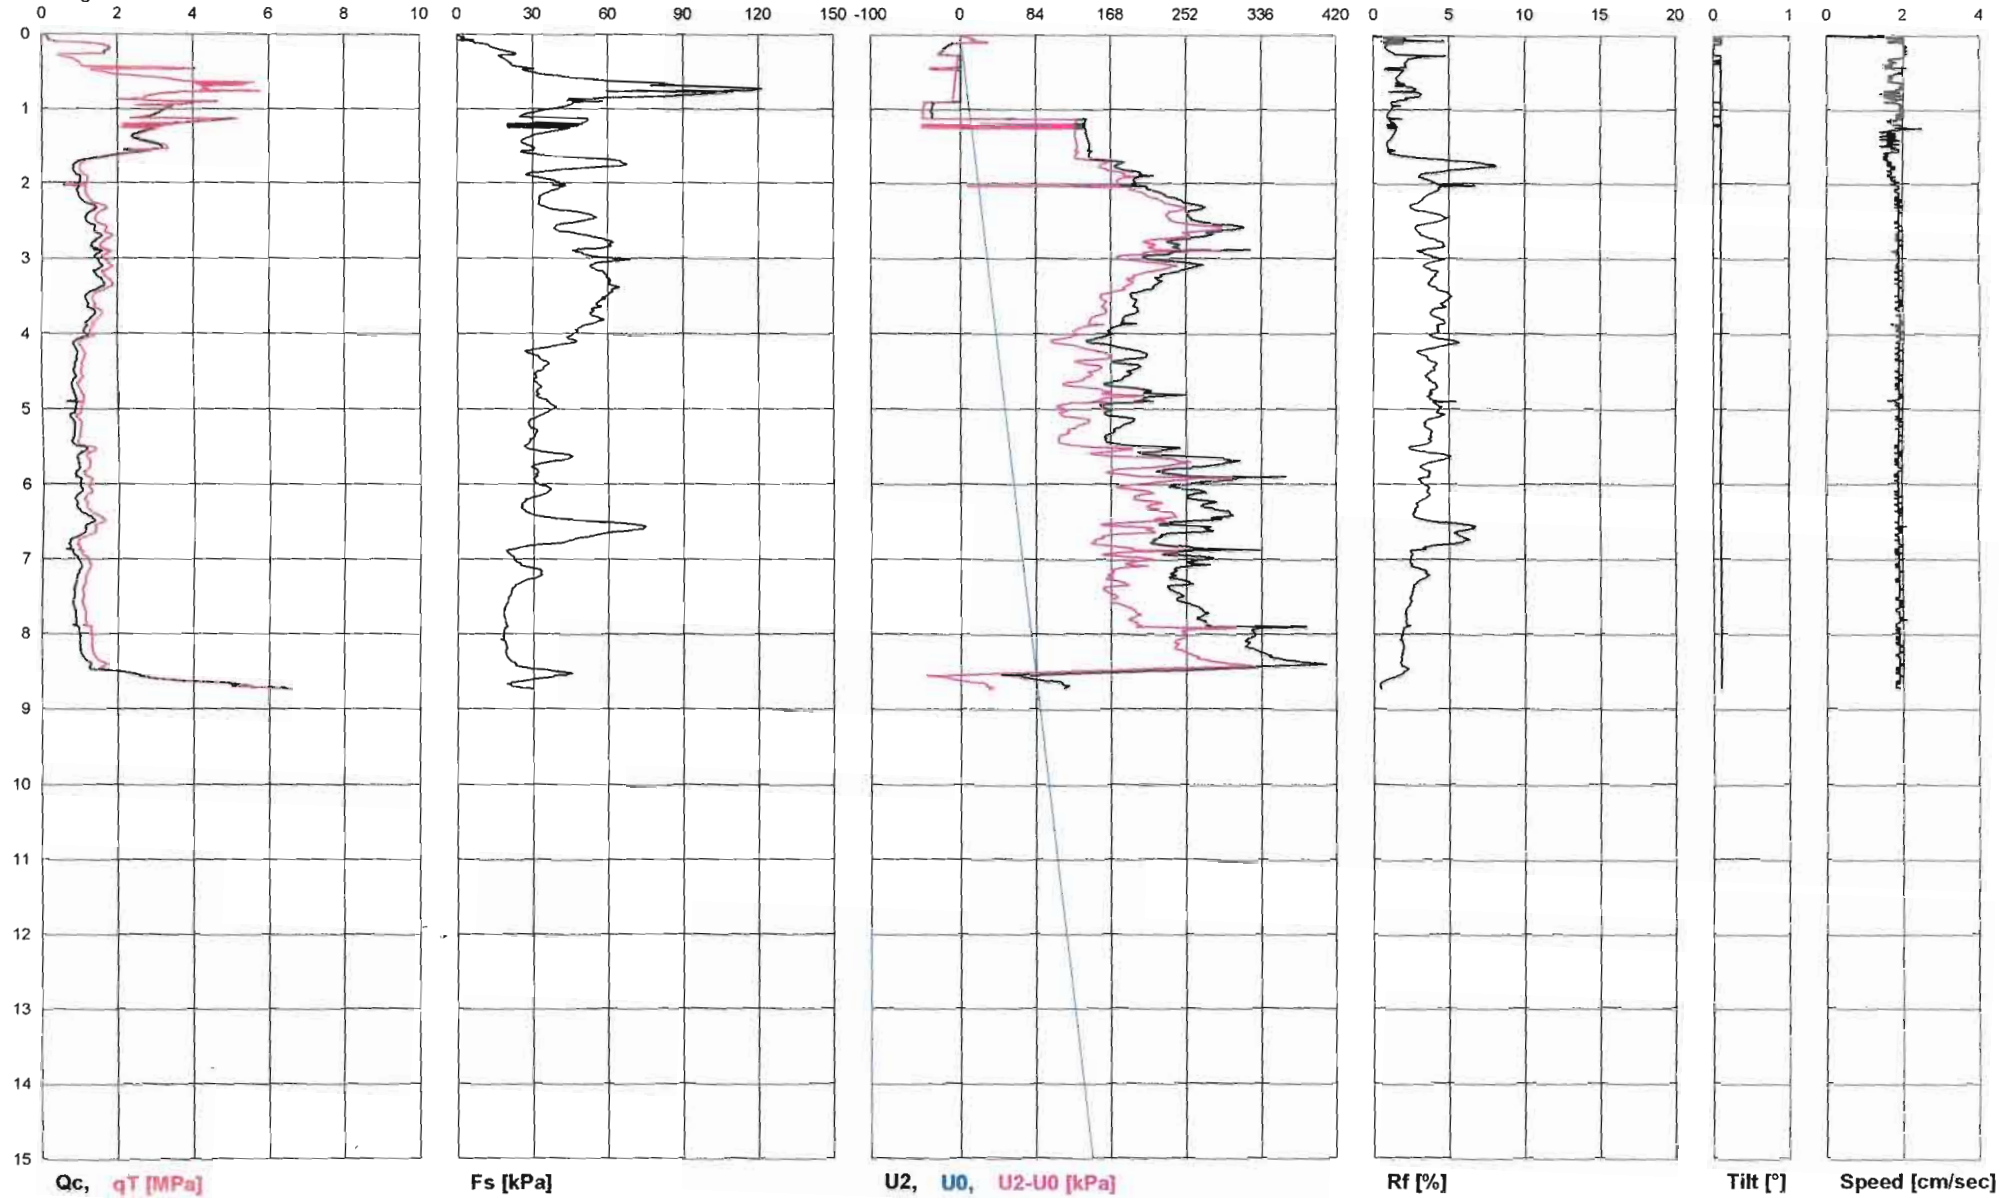

TGSW03 for Paganí Geotechnical Equipment acquisition systems

Site: 07031

Locality: RAVENNA

Test Location: 3.cpt


Date: 05/02/2007

Abs. quota [cm]: 0

Prehole [cm]: 0

Hydrostatic Line [cm]: 0

Page 1/1

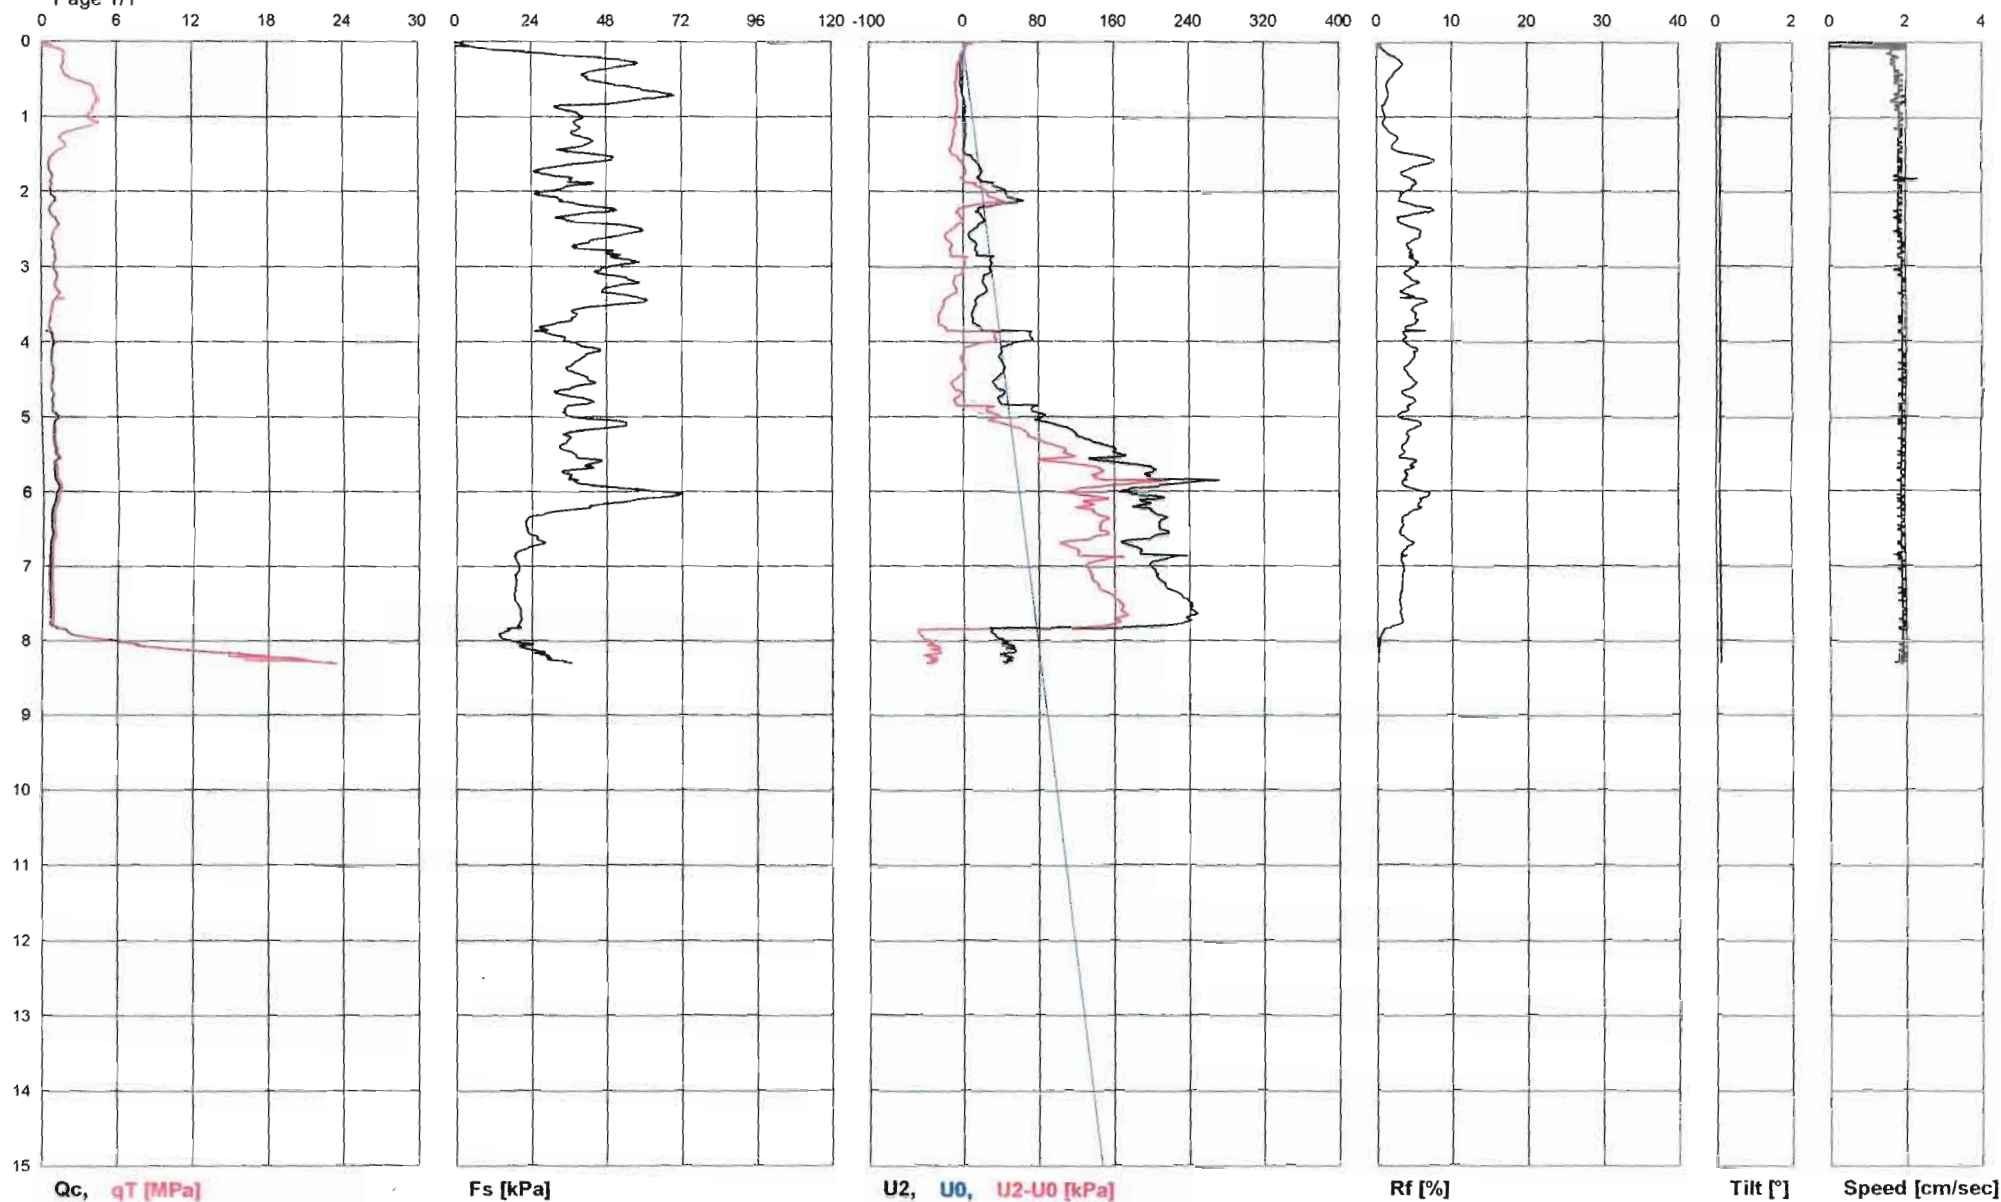

TGSW03 for Pagani Geotechnical Equipment acquisition systems

Site: 07031

Locality: RAVENNA

Test Location: 2.cpt


Date: 05/02/2007

Abs. quota [cm]: 0

Prehole [cm]: 0

Hydrostatic Line [cm]: 0

Page 1/1

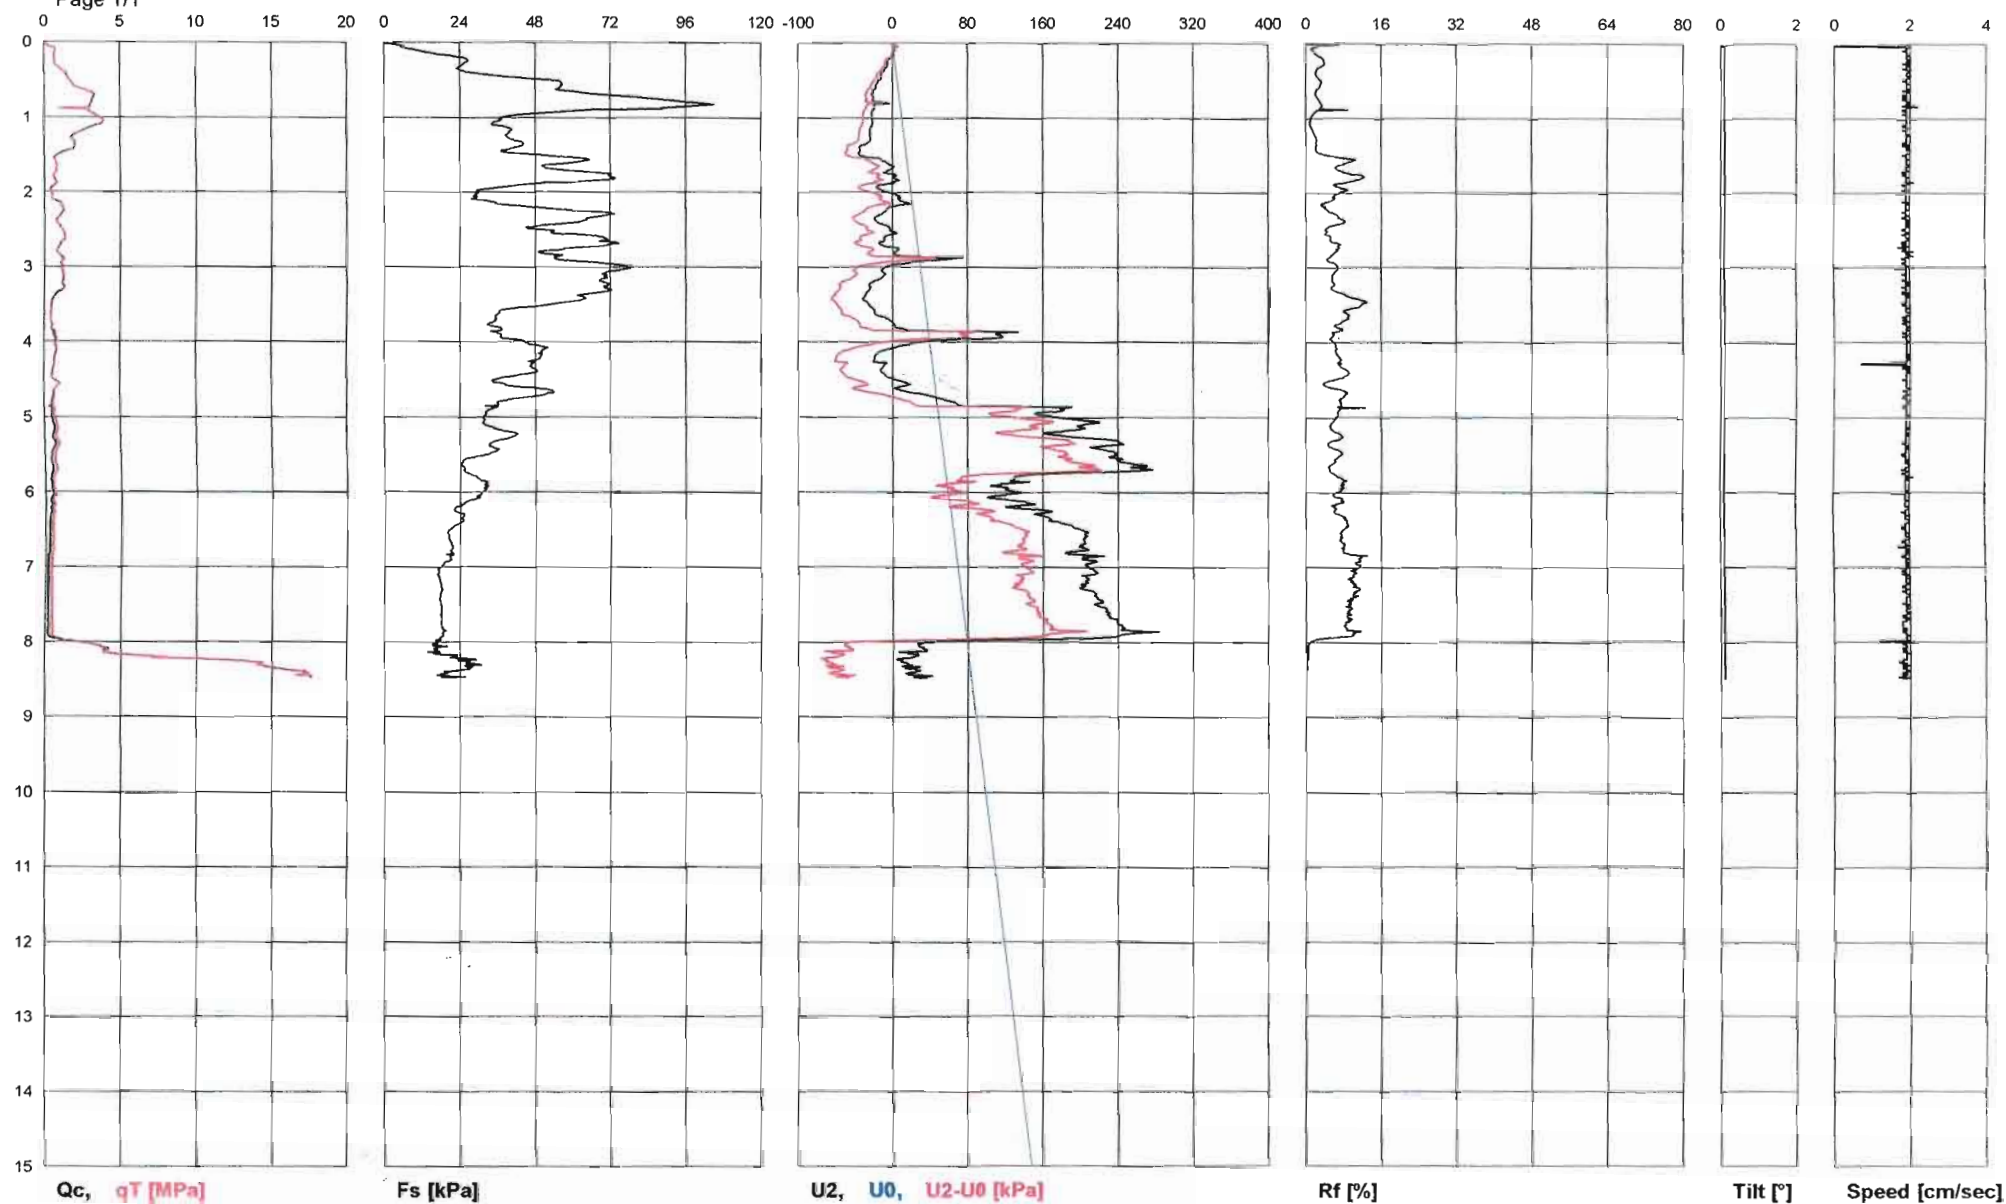


TGSW03 for Pagani Geotechnical Equipment acquisition systems

PROVA PENETROMETRICA STATICA CON PUNTA ELETTRICA
DIAGRAMMI DI RESISTENZA

RIF. PROVA:	CPTU n°:
U07-15	RER2

COMMITTENTE: Regione Emilia Romagna
 CANTIERE: Casalborsetti (Ra)
 DATA: 29/01/2015

PROFONDITA' MASSIMA DELLA PROVA (m da p.c.): 20,70
 PROFONDITA' FALDA (m da p.c.): 0,30
 PREFORO (m da p.c.): 0,00

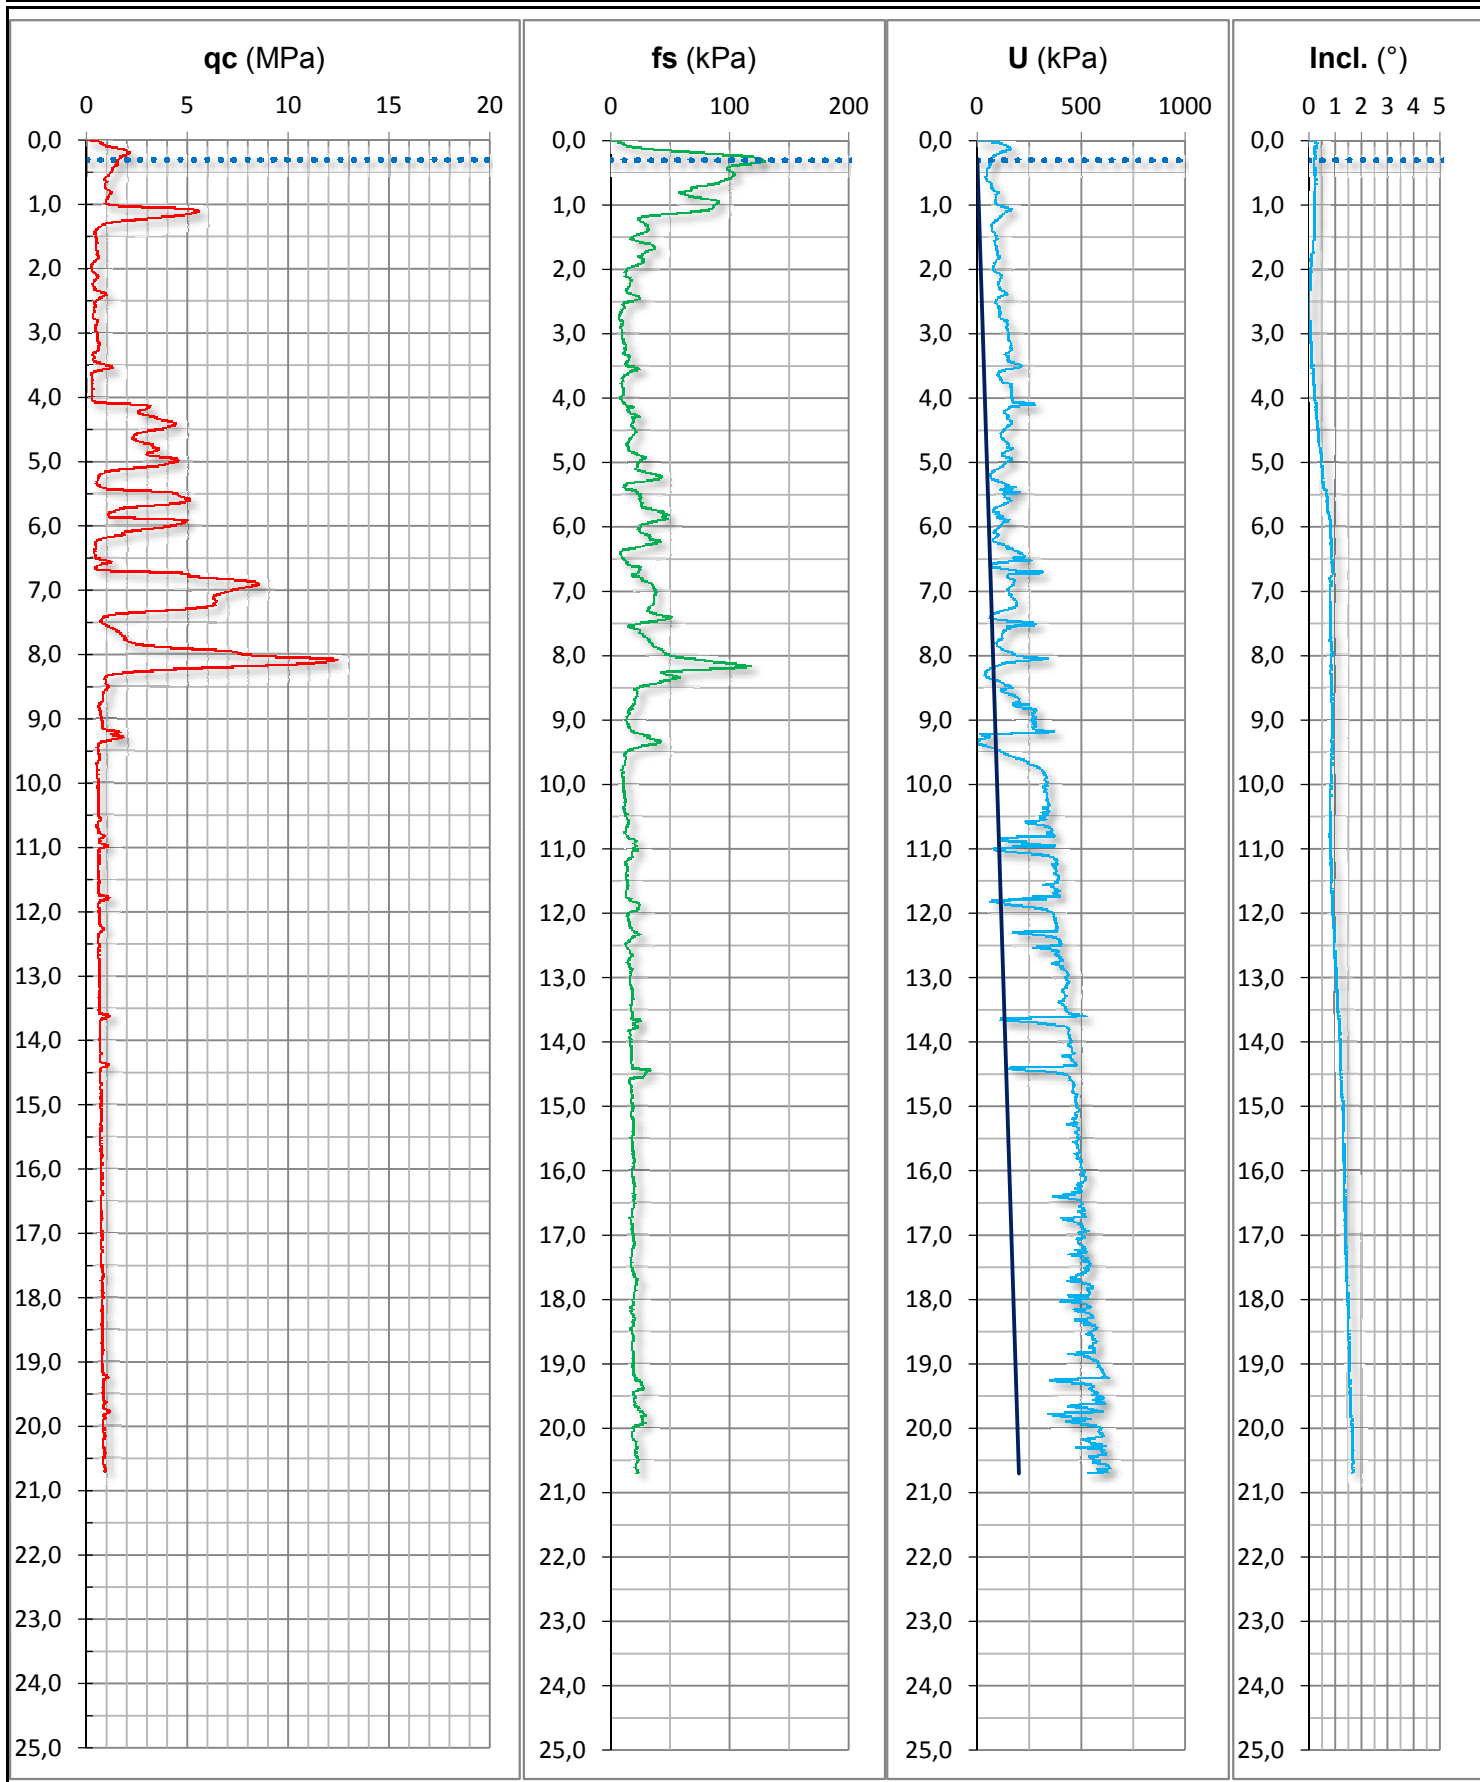

PROVA PENETROMETRICA STATICA CON PUNTA ELETTRICA
DIAGRAMMI DI RESISTENZA

RIF. PROVA: CPTU n°:

U07-15

RER3

COMMITTENTE: Regione Emilia Romagna


CANTIERE: Marina di Ravenna (Ra)

DATA: 28/01/2015

PROFONDITA' MASSIMA DELLA PROVA (m da p.c.): 20,70

PROFONDITA' FALDA (m da p.c.): 1,30

PREFORO (m da p.c.): 0,00

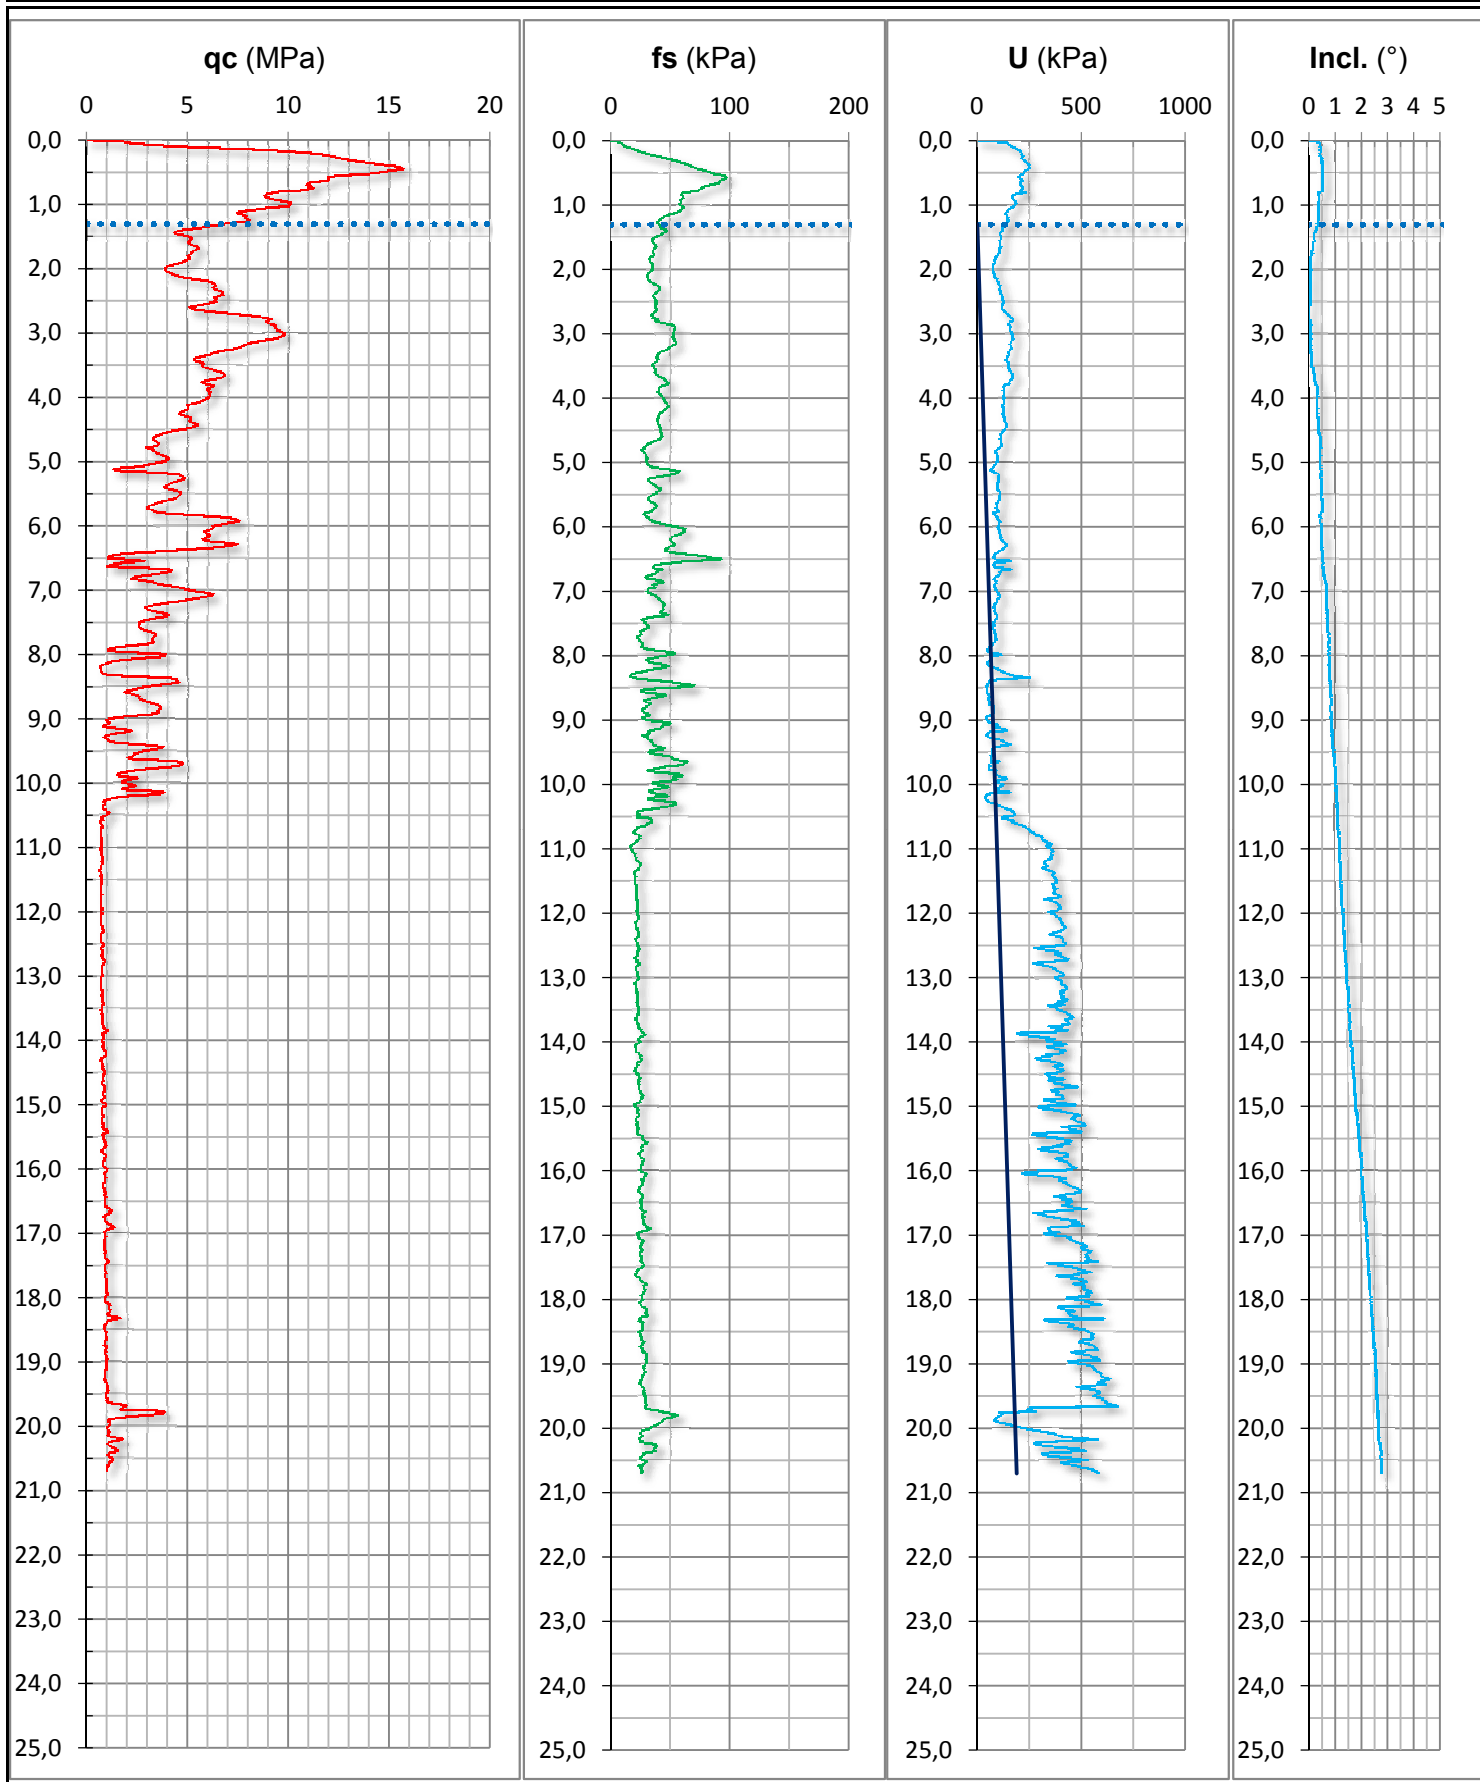

CPTU57A

PROVA PENETROMETRICA STATICA CON PUNTA ELETTRICA
DIAGRAMMI DI RESISTENZA

RIF. PROVA:

CPTU n°:

U07-15

RER4

COMMITTENTE: Regione Emilia Romagna


CANTIERE: Lido di Savio (Ra)

DATA: 28/01/2015

PROFONDITA' MASSIMA DELLA PROVA (m da p.c.): 20,70


PROFONDITA' FALDA (m da p.c.): 1,20

PREFORO (m da p.c.): 0,00

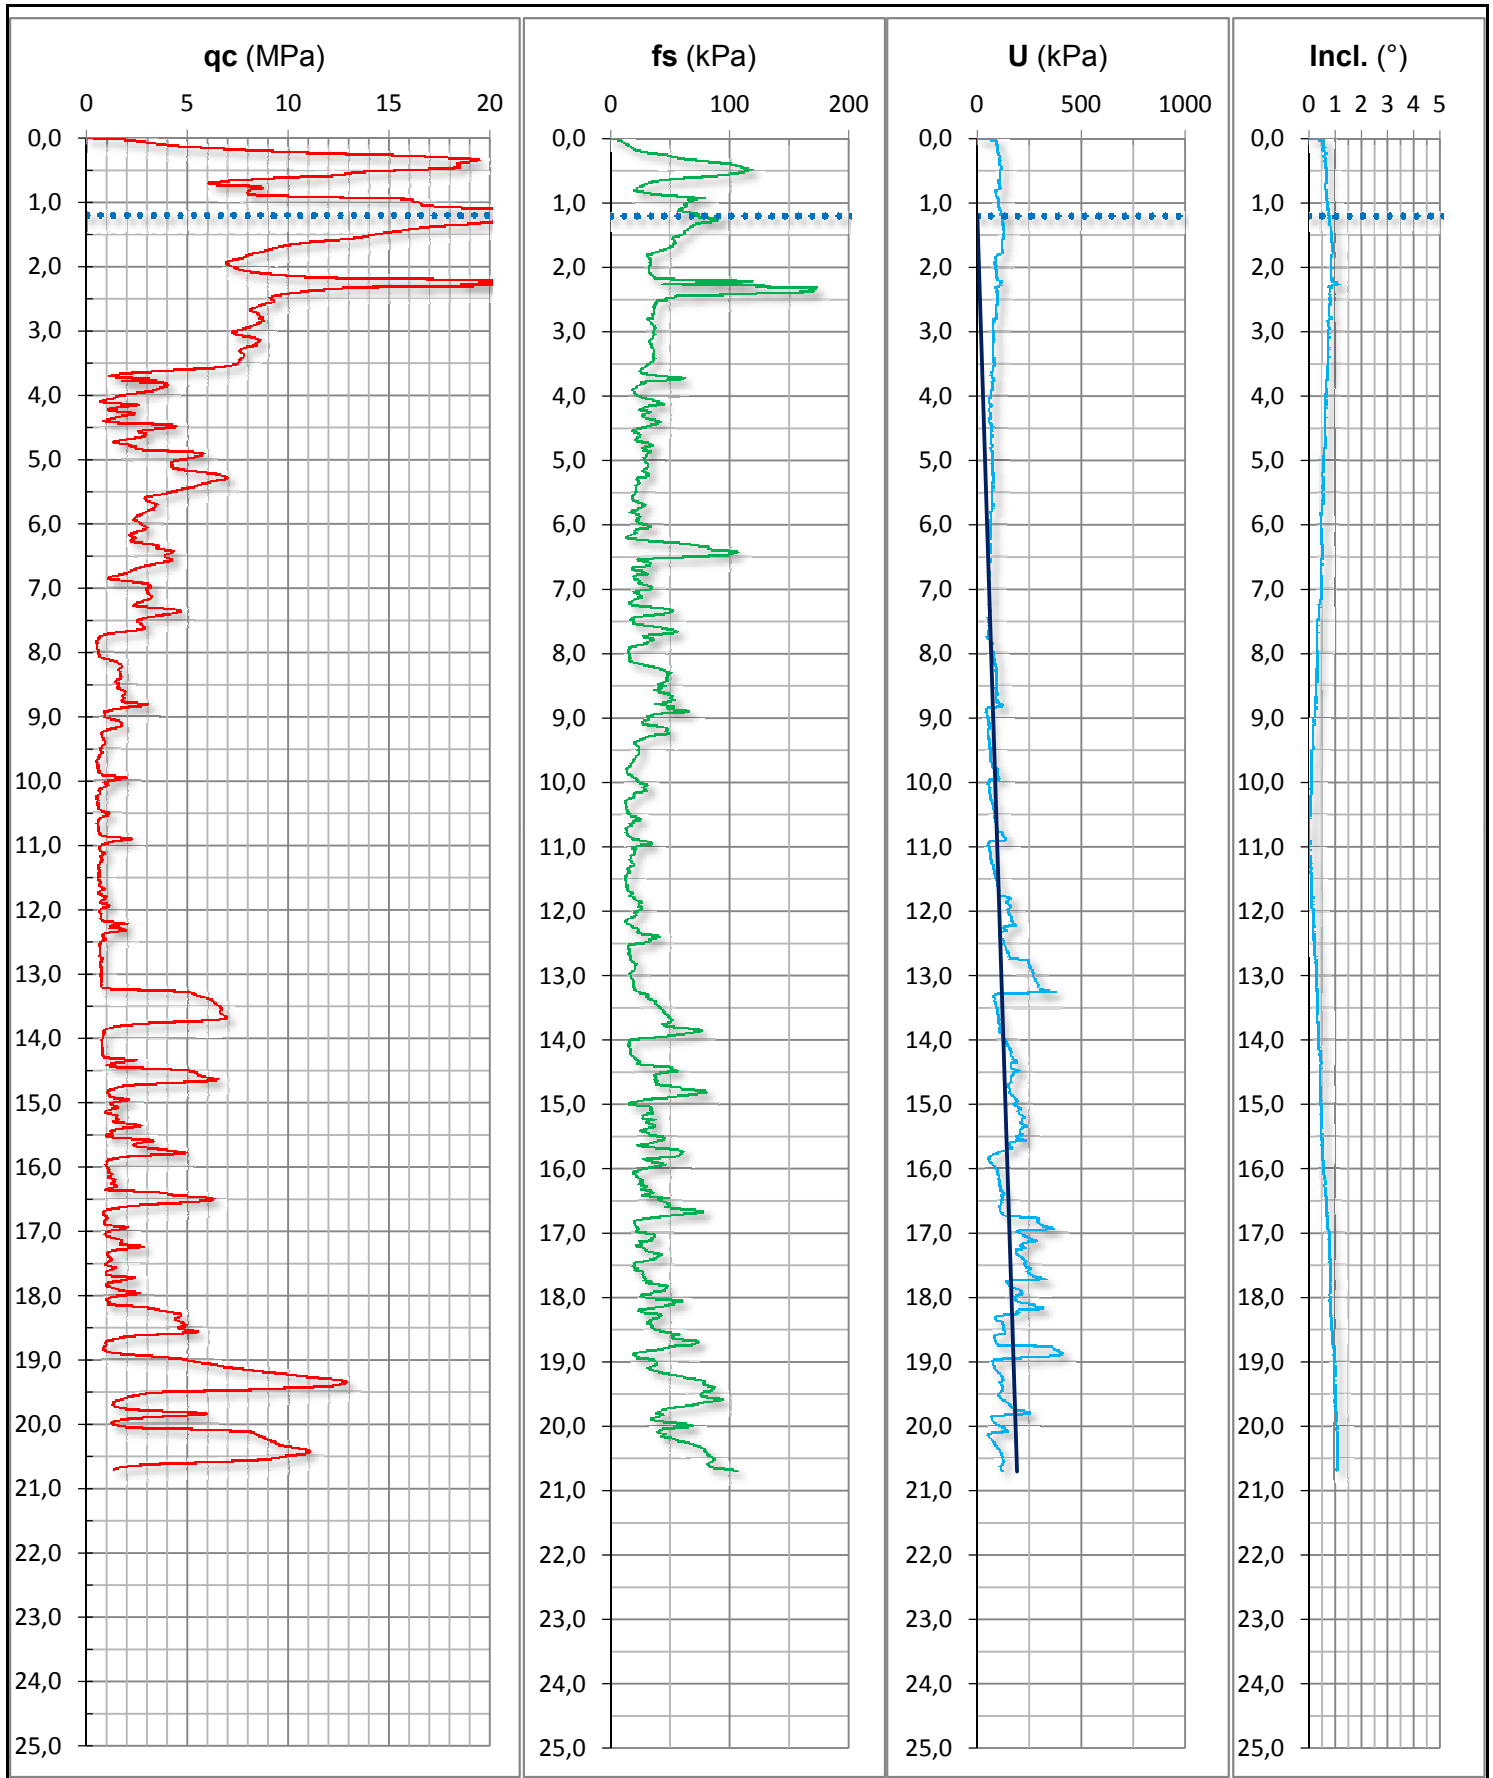

GEOLOG s.r.l.		Commissioner: PROGRA s.r.l.	
Site: Discarica Hera V. Romea N. Locality: Ravenna		Test Location: Discarica CPTU 2 Date: 16/03/2005	
		Abs. quota [cm]: 0 Prehole [cm]: 0 Hydrostatic Line [cm]: 190	

Page 1/3

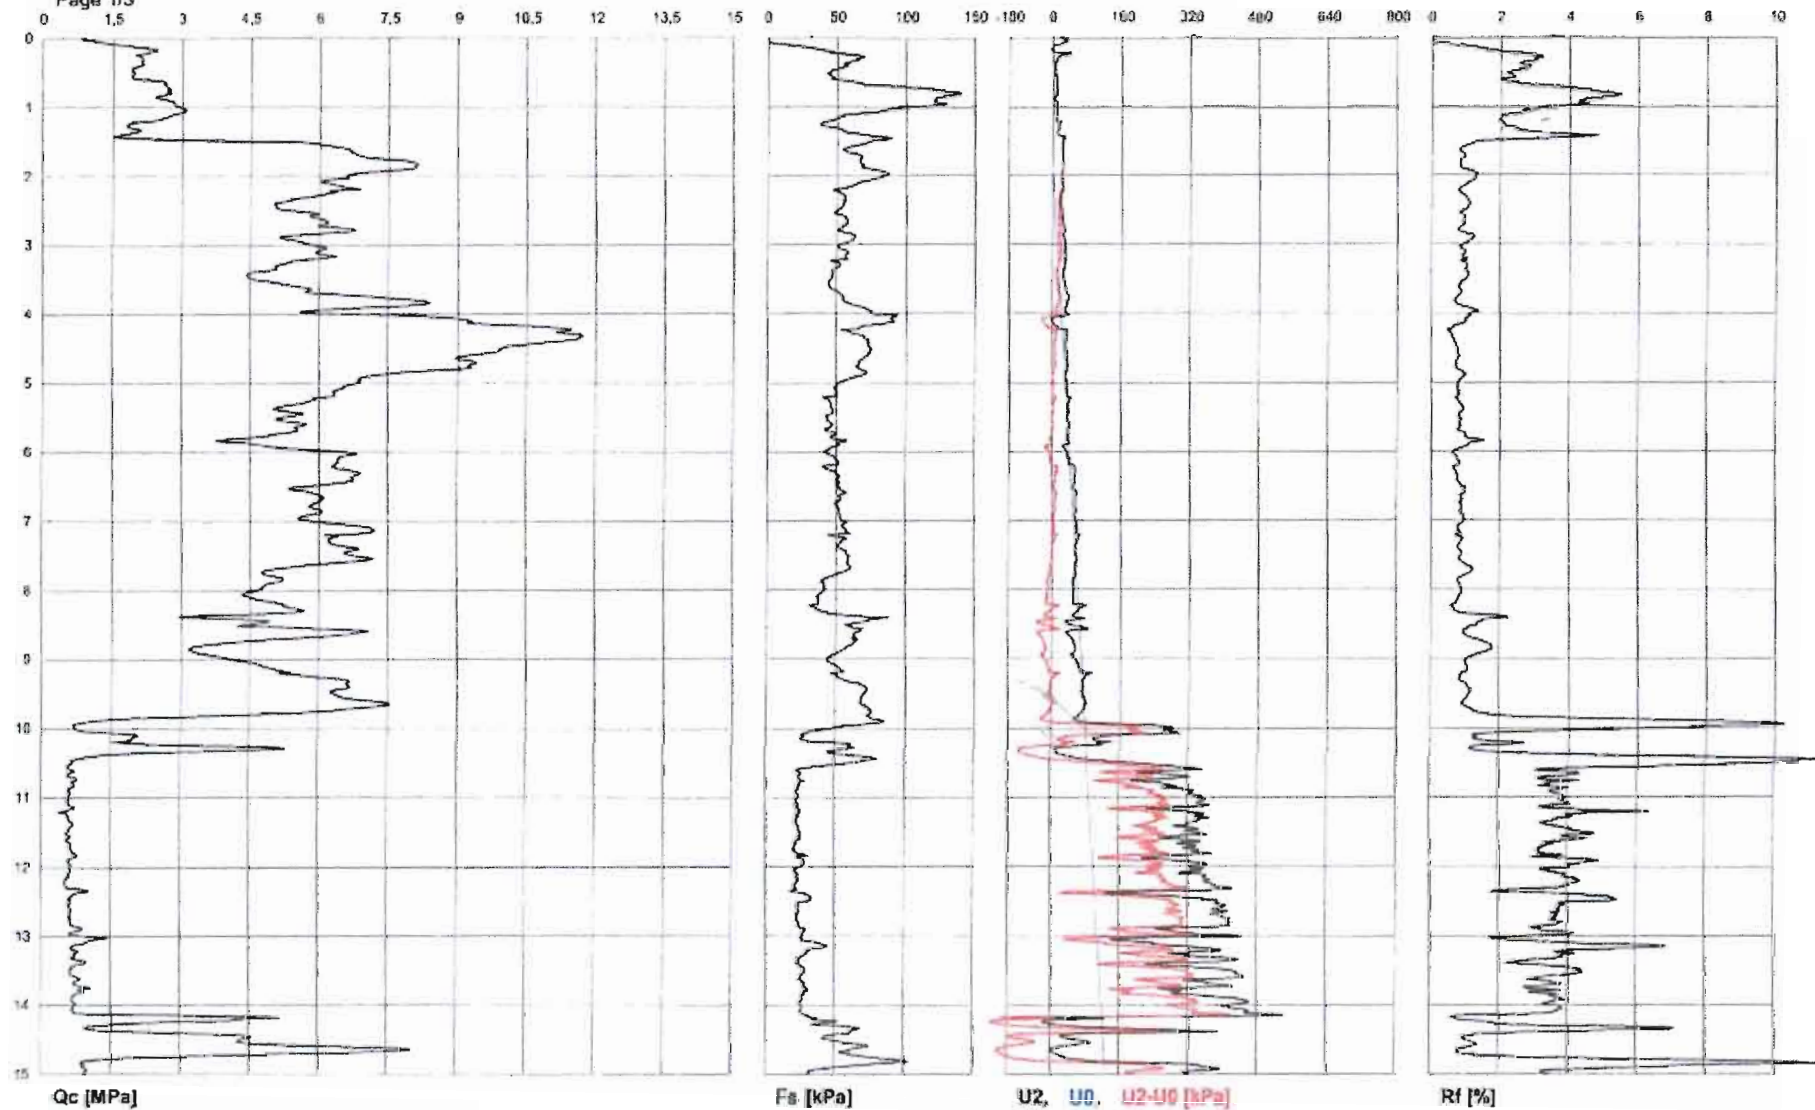

Qc [MPa]

Fs [kPa]

U2, U0, U2-U0 [kPa]

Rf [%]

GEOLOG s.r.l.


Commissioner: PROGRA s.r.l.

Site: Discarica Hera V. Romea N.
Locality: Ravenna

Test Location: Discarica CPTU 2
Date: 16/03/2005

Abs. quota [cm]: 0
Prehole [cm]: 0
Hydrostatic Line [cm]: 190

Page 2/3

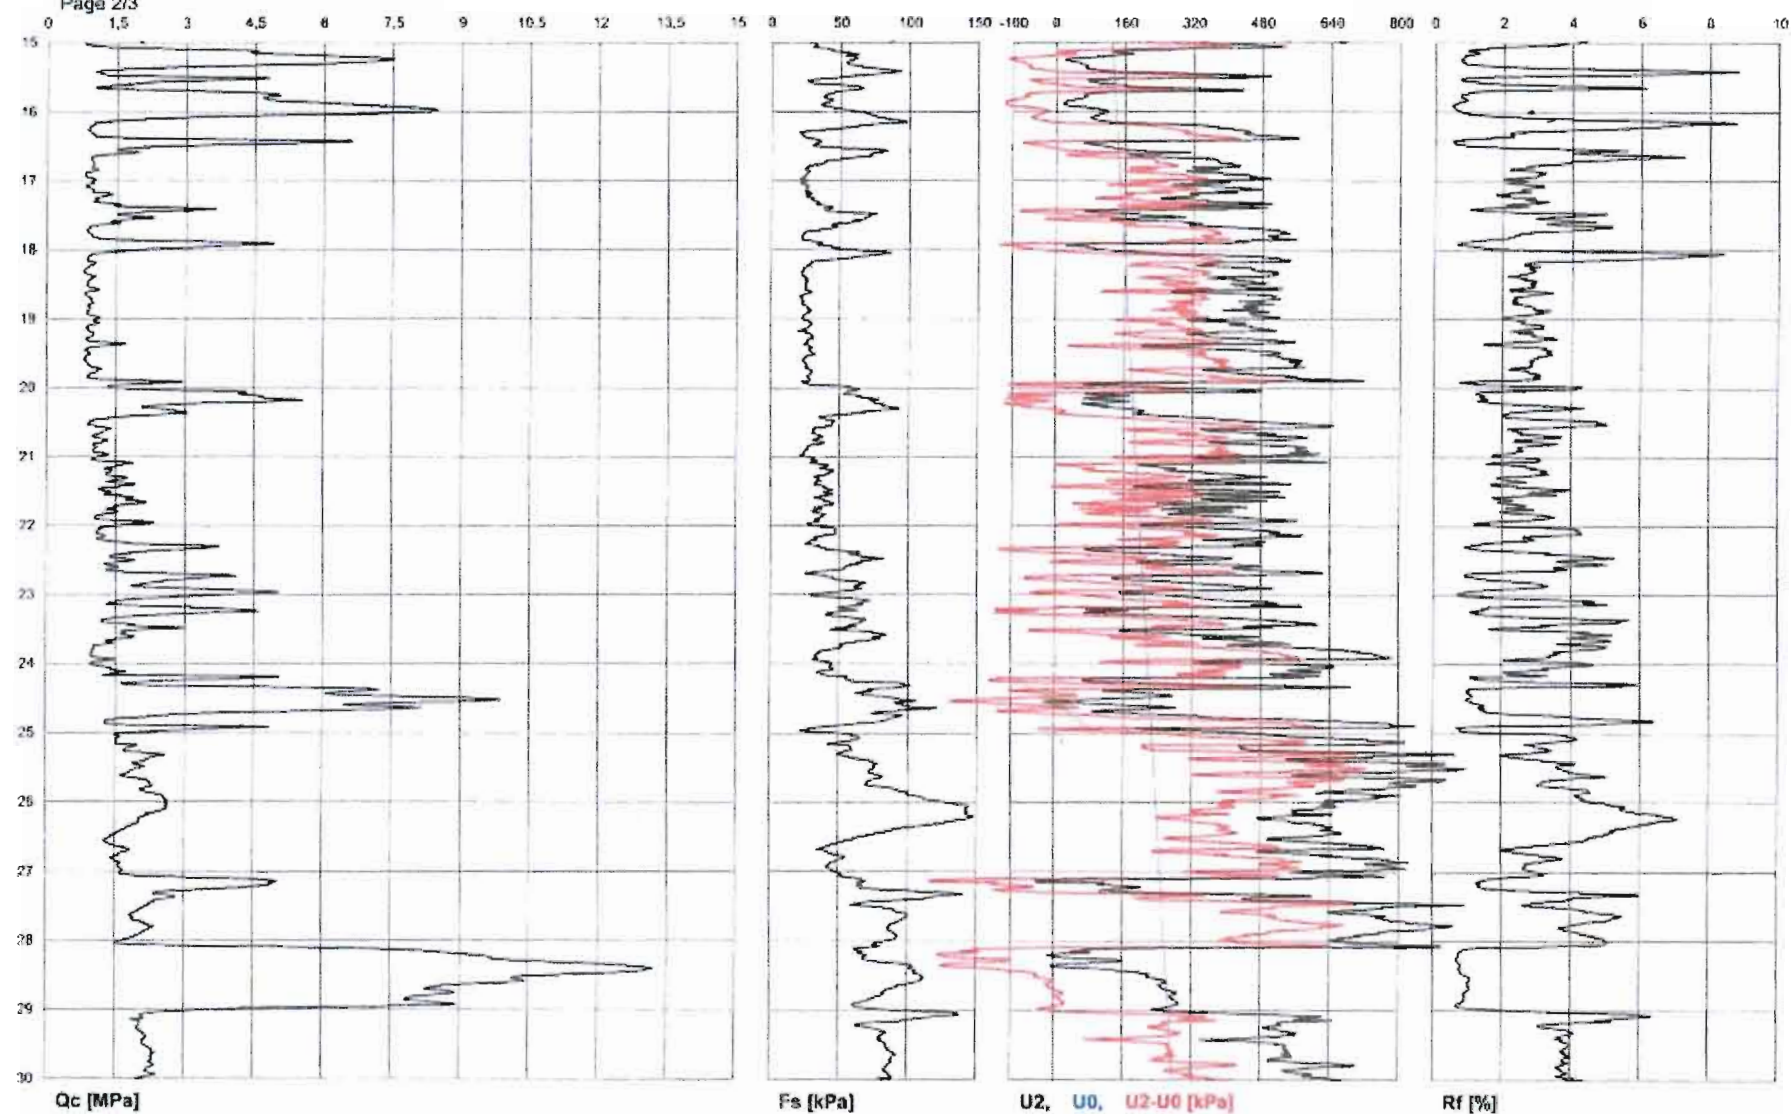

GEOLOG s.r.l.


Commissioner: PROGRA s.r.l.

Site: Discarica Hera V. Romea N.
Locality: Ravenna

Test Location: Discarica CPTU 2
Date: 16/03/2005

Absl. quota [cm]: 0
Prehole [cm]: 0
Hydrostatic Line [cm]: 190

Page 3/3

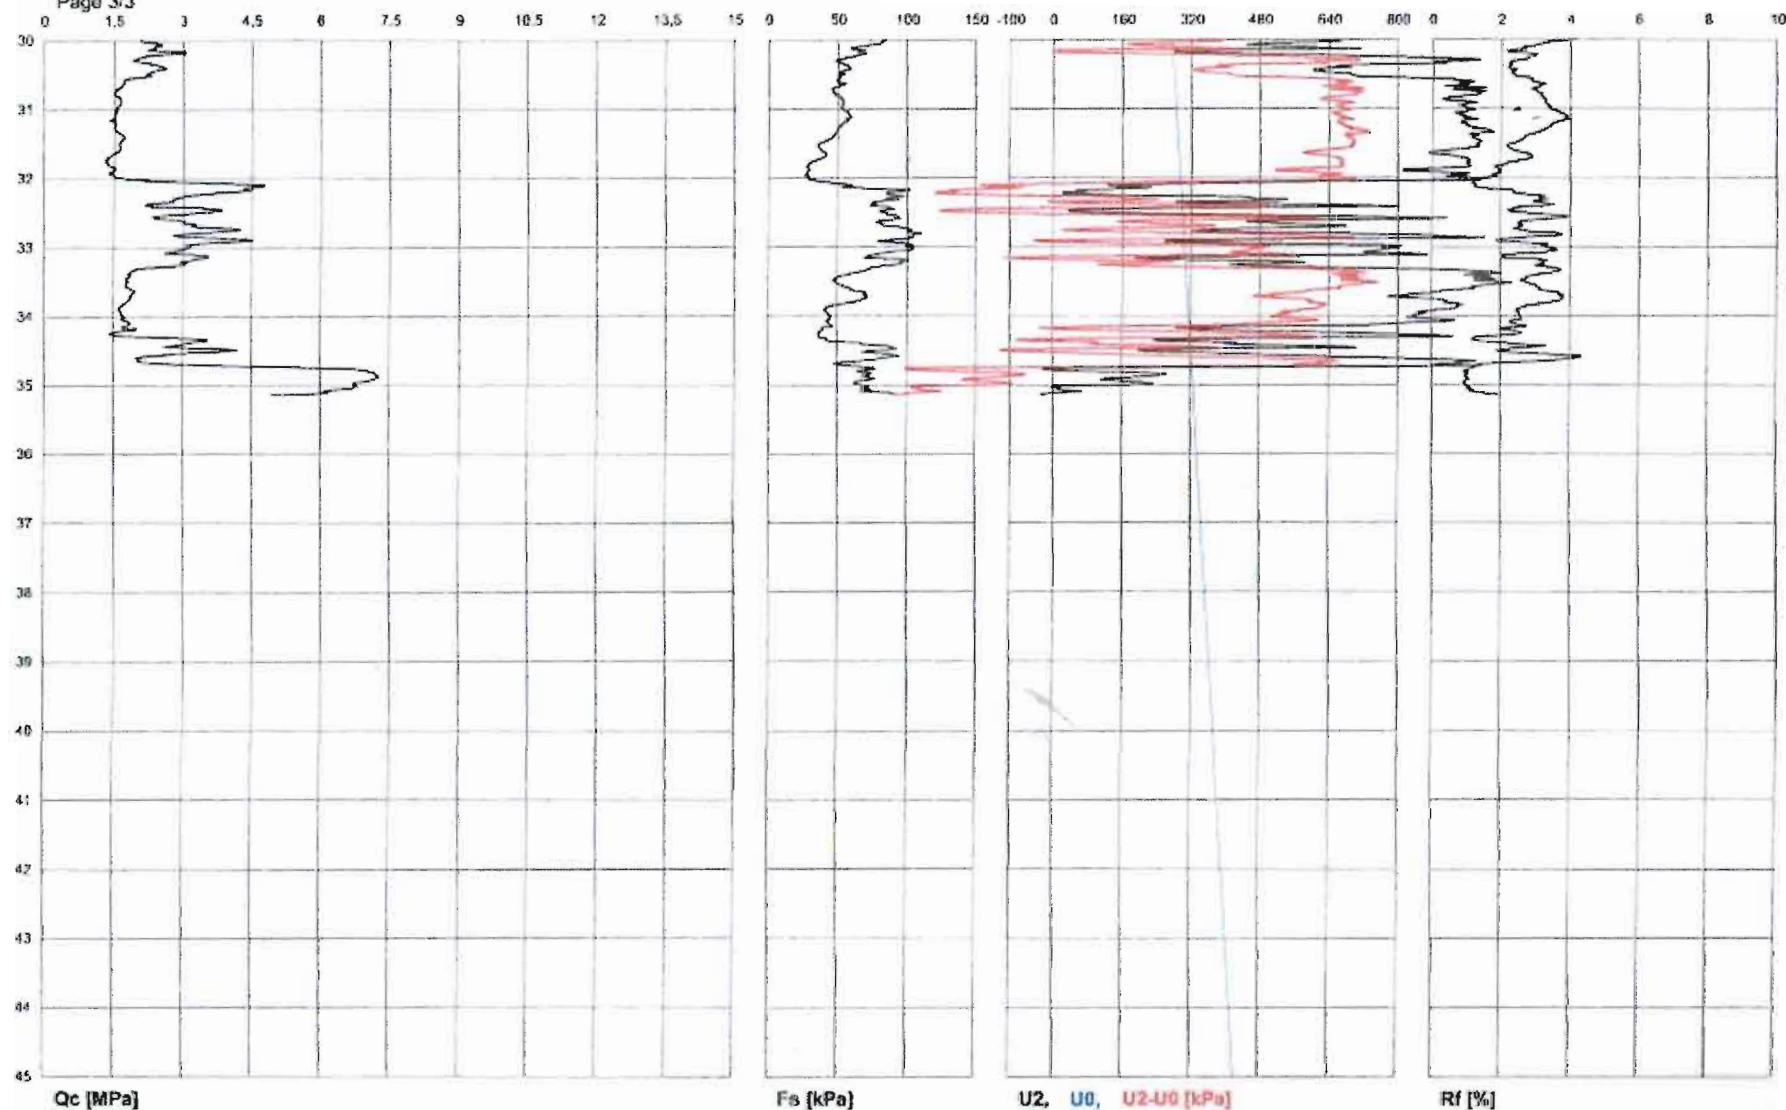

pergeo

www.pergeo.it - info @pergeo.it

SCPTU 3

pergeo

Committente: Comune di Ravenna
Cantiere: Piazzale Kennedy (RA)
Data: 22/03/2013

ID Prova: SCPTU 3
Profondità falda: mt 2 da p.c.
Preforo: 1,20 mt scavo + fino a mt 7,00 di dph

Profondità massima raggiunta: 30,00 mt
Punta sismica: Tecnopenta G1-CPL2IN - SISMI
n° Dissipazioni eseguite: 0

Prova eseguita da:
Pergeo S.r.l.
via dell'artigianato,2 44130 - Ro Ferrarese
www.pergeo.it - info @pergeo.it
Dir.del Laboratorio: Dr.Geol.M.Condotta
Sperimentatore: Dr.Geol. F. Zanella

Prof.	RP	RL	PN	Incl.	V.avanz	Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz
metri	Mpa	KPa	KPa	Gradi °	cm/sec	metri	Mpa	KPa	KPa	Gradi °	cm/sec	metri	Mpa	KPa	KPa	Gradi °	cm/sec	metri	Mpa	KPa	KPa	Gradi °	cm/sec	metri	Mpa	KPa	KPa	Gradi °	cm/sec
0.020	0.058	0.611	7.570	0.588	1.930	1.660	0.050	1.613	-3.420	0.481	2.160	3.300	0.012	1.172	7.570	1.219	2.160	4.940	0.017	0.254	22.220	0.890	2.190	6.600	0.301	3.280	42.970	1.692	2.150
0.040	0.026	0.060	1.460	0.563	2.560	1.680	0.135	1.058	-2.200	0.608	2.180	3.320	0.012	0.950	7.570	1.202	2.180	4.960	0.017	0.476	22.220	0.806	2.200	6.620	0.354	3.280	44.200	1.638	2.130
0.060	0.006	0.171	1.460	0.856	2.610	1.700	0.050	0.058	-4.640	0.613	2.150	3.340	0.012	0.616	7.570	1.158	2.170	4.980	0.017	0.365	22.220	0.841	2.220	6.640	0.407	3.836	45.420	1.669	2.110
0.080	0.058	0.949	0.240	0.662	2.530	1.720	0.083	1.506	-4.640	0.670	2.190	3.360	0.012	0.505	7.570	1.188	2.100	5.000	0.017	0.365	23.440	0.843	2.250	6.660	0.567	5.391	45.420	1.609	2.040
0.100	0.092	0.953	1.010	0.944	2.560	1.740	0.040	1.062	-4.640	0.659	2.180	3.380	0.034	0.505	7.570	1.181	2.100	5.040	0.034	0.623	30.760	0.819	1.920	6.680	0.684	4.280	46.640	1.596	2.150
0.120	0.067	0.842	0.240	1.451	2.580	1.760	0.051	0.951	-4.640	0.595	2.110	3.400	0.032	0.612	7.570	1.193	2.150	5.060	0.044	0.734	31.990	0.779	2.240	6.700	0.652	5.169	47.860	1.603	2.220
0.140	0.007	0.064	2.680	0.268	2.540	1.780	0.040	0.951	-4.640	0.576	2.180	3.420	0.064	0.612	7.570	1.079	2.120	5.080	0.034	0.623	31.990	0.838	2.230	6.720	0.588	5.503	46.640	1.623	2.190
0.160	0.005	0.282	3.900	0.987	2.500	1.800	0.051	1.062	-4.640	0.686	2.180	3.440	0.011	0.723	6.340	1.083	2.150	5.100	0.032	0.730	31.990	0.805	2.200	6.740	0.641	5.614	47.860	1.558	2.160
0.180	0.047	0.282	0.240	1.017	2.580	1.820	0.083	0.728	-5.870	0.592	2.220	3.460	0.032	0.612	7.570	1.081	2.080	5.120	0.034	0.734	31.990	0.812	2.290	6.760	0.737	4.836	49.080	1.598	2.100
0.200	0.026	0.727	2.680	1.032	2.500	1.840	0.052	2.399	-5.870	0.681	2.270	3.480	0.031	1.608	7.570	1.069	2.100	5.140	0.034	0.623	31.990	0.781	2.180	6.780	0.822	4.614	50.300	1.608	2.070
0.220	0.050	0.842	3.900	0.812	2.510	1.860	0.052	2.177	-7.090	0.673	2.220	3.500	0.031	1.386	6.340	1.160	2.200	5.160	0.043	0.619	31.990	0.905	2.060	6.800	1.043	6.939	51.520	1.557	2.130
0.240	0.010	0.175	2.200	0.636	2.510	1.880	0.084	1.843	-5.870	0.688	2.220	3.520	0.028	0.045	7.570	1.078	2.220	5.180	0.032	0.619	31.990	0.842	2.320	6.820	1.213	10.050	46.640	1.400	2.090
0.260	0.028	0.842	3.900	0.834	2.580	1.900	0.042	2.732	-7.090	0.702	2.280	3.540	0.007	0.823	7.570	1.104	2.190	5.200	0.032	0.619	31.990	0.862	2.280	6.840	0.894	14.606	45.420	1.429	2.170
0.280	0.026	0.162	2.680	1.069	2.630	1.920	0.031	1.843	-7.090	0.632	2.180	3.560	0.081	0.489	7.570	1.102	2.160	5.220	0.032	0.619	31.990	0.872	2.280	6.860	1.181	10.050	47.860	1.434	2.060
0.300	0.006	0.162	2.680	0.945	2.640	1.940	0.042	1.510	-7.090	0.733	2.250	3.580	0.060	0.378	7.570	1.089	2.100	5.240	0.032	0.619	30.760	0.854	2.350	6.880	1.458	10.383	49.080	1.447	2.180
0.320	0.048	0.273	3.900	0.961	2.540	1.960	0.043	1.070	-7.090	0.738	2.230	3.600	0.027	0.596	7.570	1.066	2.090	5.260	0.032	0.619	31.990	0.839	2.290	6.900	1.374	9.800	50.300	1.418	2.120
0.340	0.070	0.171	7.570	0.824	2.530	1.980	0.043	0.736	-7.090	0.754	2.160	3.620	0.059	0.596	5.120	1.190	2.180	5.280	0.032	0.619	31.990	0.800	2.200	6.920	1.054	11.911	47.860	1.437	2.180
0.360	0.016	0.385	3.900	1.507	2.560	2.000	0.043	1.292	-7.090	0.753	2.170	3.640	0.027	2.596	7.570	1.056	2.130	5.300	0.043	0.619	31.990	0.811	2.290	6.940	0.959	13.133	45.420	1.411	2.180
0.380	0.038	0.278	2.320	0.947	2.560	2.020	0.032	0.959	-7.090	0.752	2.250	3.660	0.144	0.485	7.570	0.919	2.100	5.320	0.037	0.603	31.990	1.008	1.930	6.960	1.138	8.018	45.420	1.440	2.130
0.400	0.099	0.397	5.630	1.268	2.560	2.040	0.054	1.070	-7.090	0.771	2.280	3.680	0.004	0.259	7.570	0.986	2.150	5.340	0.037	0.714	31.990	0.905	2.010	6.980	1.074	9.240	45.420	1.447	2.160
0.420	0.060	0.269	1.460	1.171	2.590	2.060	0.039	0.979	-9.530	0.604	2.640	3.700	0.025	0.481	6.340	1.033	2.190	5.360	0.048	0.714	31.990	0.888	2.150	7.000	1.044	9.244	45.420	1.461	2.190
0.440	0.005	0.718	1.460	1.237	2.530	2.080	0.018	0.756	-10.750	0.723	2.110	3.720	0.025	0.370	7.570	1.035	2.200	5.380	0.037	0.714	30.760	1.012	2.090	7.020	0.915	11.574	44.200	1.462	2.130
0.460	0.004	0.603	0.240	1.223	2.580	2.100	0.039	0.756	-9.530	0.726	2.120	3.740	0.003	0.144	6.340	1.069	2.190	5.400	0.069	0.825	31.990	0.966	2.050	7.040	0.872	9.796	42.970	1.428	2.150
0.480	0.208	0.162	3.760	1.357	2.660	2.120	0.039	0.756	-9.530	0.621	2.110	3.760	0.024	0.366	7.570	1.055	2.190	5.420	0.069	0.825	31.990	0.966	2.070	7.060	0.819	7.574	42.970	1.437	2.180
0.500	0.027	0.829	1.460	1.274	2.660	2.140	0.029	0.534	-10.750	0.765	2.050	3.780	0.003	0.477	7.570	1.084	2.160	5.440	0.048	0.825	30.760	1.067	2.120	7.080	0.745	8.018	41.750	1.478	2.180
0.520	0.059	0.940	5.120	1.278	2.660	2.160	0.050	0.534	-9.530	0.686	2.100	3.800	0.000	0.358	7.570	1.047	2.220	5.460	0.069	0.825	31.990	0.991	2.150	7.100	0.670	9.463	40.530	1.456	2.240
0.540	0.006	0.393	3.900	1.295																									



SCPTU 3



Prova eseguita da:

Pergeo S.r.l.

via dell'artigianato, 2 44130 - Ro Ferrarese

www.pergeo.it - info @pergeo.it

Dir. del Laboratorio: Dr. Geol. M. Condotta

Sperimentatore: Dr. Geol. F. Zanella

Committente: Comune di Ravenna

ID Prova: SCPTU 3

Profondità massima raggiunta: 30,00 mt

Cantiere: Piazzale Kennedy (RA)

Profondità falda: mt 2 da p.c.

Punta sismica: Tecnopenta G1-CPL2IN - SISMI

Data: 22/03/2013

Preforo: 1,20 mt scavo + fino a mt 7,00 di dpsh

n° Dissipazioni eseguite: 0

Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz
metri	Mpa	KPa	KPa	Gradi °	cm/sec	metri	Mpa	KPa	KPa	Gradi °	cm/sec	metri	Mpa	KPa	KPa	Gradi °	cm/sec	metri	Mpa	KPa	KPa	Gradi °	cm/sec	metri	Mpa	KPa	KPa	Gradi °	cm/sec	metri	Mpa	KPa	KPa	Gradi °	cm/sec
8.240	1.315	26.562	80.830	1.763	2.130	9.880	1.629	35.133	18.550	1.915	2.120	11.520	2.383	23.129	35.650	2.182	2.210	13.180	4.011	50.272	33.900	2.519	2.150	14.820	5.378	30.034	53.960	2.729	2.060	14.820	5.378	30.034	53.960	2.729	2.060
8.260	0.730	30.562	107.690	1.751	2.090	9.900	1.374	37.578	18.550	1.955	2.070	11.540	2.266	23.574	33.210	2.144	2.040	13.200	3.756	43.606	10.010	2.499	2.180	14.840	5.452	30.590	56.410	2.762	2.050	14.840	5.452	30.590	56.410	2.762	2.050
8.280	0.666	27.784	101.580	1.800	2.100	9.920	1.097	44.800	12.450	1.949	2.160	11.560	2.436	25.351	34.430	2.157	2.050	13.220	3.680	39.602	14.890	2.515	2.170	14.860	5.452	32.145	57.630	2.781	2.030	14.860	5.452	32.145	57.630	2.781	2.030
8.300	0.634	22.784	99.140	1.780	2.150	9.940	0.906	43.800	21.000	1.950	2.160	11.580	2.617	28.129	19.780	2.176	2.080	13.240	3.829	36.824	18.550	2.506	2.240	14.880	5.388	33.145	57.630	2.759	2.110	14.880	5.388	33.145	57.630	2.759	2.110
8.320	0.548	21.669	96.700	1.745	2.080	9.960	0.862	42.907	49.080	1.938	2.190	11.600	2.734	33.018	21.460	2.182	2.130	13.260	4.350	30.268	24.660	2.517	2.190	14.900	5.239	34.034	57.630	2.733	2.160	14.900	5.239	34.034	57.630	2.733	2.160
8.340	0.579	19.113	97.920	1.724	2.120	9.980	0.979	42.574	108.910	1.976	2.180	11.620	2.862	35.463	24.640	2.200	2.160	13.280	4.880	30.598	30.760	2.556	2.180	14.920	5.165	34.479	57.630	2.752	2.120	14.920	5.165	34.479	57.630	2.752	2.120
8.360	0.569	18.002	97.920	1.755	2.130	10.000	1.074	42.463	102.800	1.984	2.150	11.640	2.872	38.129	24.640	2.197	2.070	13.300	5.051	29.709	31.990	2.527	2.220	14.940	5.311	35.026	60.070	2.754	2.090	14.940	5.311	35.026	60.070	2.754	2.090
8.380	0.546	16.998	102.800	1.759	2.070	10.020	1.096	39.240	80.830	1.995	2.150	11.660	2.904	35.129	23.420	2.183	2.080	13.320	5.008	29.153	31.990	2.541	2.150	14.960	5.566	35.804	62.510	2.760	2.060	14.960	5.566	35.804	62.510	2.760	2.060
8.400	0.525	14.665	118.680	1.761	2.080	10.040	1.561	45.042	10.010	1.950	2.360	11.680	2.936	33.129	20.240	2.184	2.080	13.340	4.900	29.038	33.210	2.556	2.240	14.980	5.907	35.693	66.170	2.769	2.030	14.980	5.907	35.693	66.170	2.769	2.030
8.420	0.514	14.887	117.460	1.734	2.090	10.060	1.795	55.487	18.790	1.951	2.130	11.700	3.042	28.907	22.680	2.173	2.070	13.360	4.815	29.927	34.430	2.548	2.220	15.000	6.194	34.471	69.840	2.762	2.090	15.000	6.194	34.471	69.840	2.762	2.090
8.440	0.545	14.327	119.900	1.775	2.070	10.080	2.498	59.487	13.670	1.962	2.120	11.720	2.957	27.463	22.680	2.205	2.090	13.380	4.794	30.149	35.650	2.572	2.120	15.020	6.103	34.070	75.940	2.756	2.650	15.020	6.103	34.070	75.940	2.756	2.650
8.460	0.545	13.439	118.680	1.750	2.070	10.100	3.029	62.598	17.570	1.958	2.150	11.740	2.925	26.463	23.900	2.223	2.070	13.400	4.633	30.367	35.650	2.576	2.160	15.040	6.305	32.626	74.720	2.756	1.990	15.040	6.305	32.626	74.720	2.756	1.990
8.480	0.545	13.661	118.680	1.720	2.120	10.120	3.157	54.264	10.010	1.967	2.170	11.760	2.903	26.236	23.900	2.209	2.060	13.420	4.505	30.034	35.650	2.572	2.240	15.060	6.294	33.959	74.720	2.754	2.070	15.060	6.294	33.959	74.720	2.754	2.070
8.500	0.545	14.216	117.460	1.759	2.110	10.140	3.029	47.264	11.230	1.975	2.270	11.780	2.956	24.459	25.120	2.171	2.110	13.440	4.378	29.367	35.650	2.564	2.250	15.080	6.358	35.292	74.720	2.757	2.100	15.080	6.358	35.292	74.720	2.757	2.100
8.520	0.522	14.657	112.570	1.724	2.190	10.160	2.964	42.038	12.450	1.991	2.220	11.800	3.052	24.792	26.340	2.195	2.180	13.460	4.375	28.359	36.870	2.575	2.290	15.100	6.656	36.848	78.380	2.760	2.160	15.100	6.656	36.848	78.380	2.760	2.160
8.540	0.543	14.990	113.790	1.747	2.150	10.180	2.996	40.371	14.890	1.967	2.190	11.820	3.073	25.903	26.340	2.175	2.150	13.480	4.513	28.915	39.310	2.572	2.290	15.120	7.007	38.848	80.830	2.731	2.120	15.120	7.007	38.848	80.830	2.731	2.120
8.560	0.543	16.546	113.790	1.766	2.110	10.200	3.039	38.260	17.330	1.983	2.230	11.840	3.052	28.792	22.200	2.221	2.170	13.500	4.747	29.582	40.530	2.603	2.200	15.140	7.167	41.959	83.270	2.736	2.110	15.140	7.167	41.959	83.270	2.736	2.110
8.580	0.543	17.101	113.790	1.779	2.080	10.220	3.039	34.816	18.550	2.005	2.190	11.860	2.988	27.236	22.200	2.210	2.090	13.520	4.916	29.689	41.750	2.596	2.240	15.160	7.006	44.733	83.270	2.757	2.080	15.160	7.006	44.733	83.270	2.757	2.080
8.600	0.522	16.990	113.790	1.751	2.120	10.240	2.985	30.705	13.670	1.983	2.180	11.880	3.081	25.895	22.680	2.208	2.040	13.540	5.086	28.133	34.430	2.602	2.230	15.180	6.516	45.955	80.830	2.749	2.160	15.180	6.516	45.955	80.830	2.749	2.160
8.620	0.543	17.212	112.570	1.781	2.120	10.260	2.931	29.367	17.570	1.980	2.280	11.900	2.879	28.451	22.680	2.194	2.120	13.560	5.331	27.022	39.310	2.606	2.220	15.200	6.048	46.733	78.380	2.763	2.160	15.200	6.048	46.733	78.380	2.763	2.160
8.640	0.543	17.323	112.570	1.792	2.150	10.280	2.878	29.034	18.790	1.983	2.200	11.920	2.570	29.117	21.460	2.215	2.110	13.580	5.673	25.137	71.060	2.594	2.180	15.220	5.600	47.951	77.160	2.749	2.110	15.220	5.600	47.951	77.160	2.749	2.110
8.660	0.543	17.435	112.570	1.798	2.080	10.300	2.963	25.923	10.010	1.987	2.150	11.940	2.570	31.451	21.460	2.230	2.150	13.600	5.928	25.026	72.280	2.612	2.040	15.240	5.270	48.507	77.160	2.733	2.120	15.240	5.270	48.507	77.160	2.733	2.120
8.680	0.522	17.768	112.570	1.794	2.080	10.320	3.194	23.582	12.450	1.984	2.200	11.960	2.836	40.006	23.900	2.228	2.060	13.620	6.035	25.248	66.170	2.600	2.030	15.260	5.302	48.395	79.600	2.771	2.160	15.					


www.pergeo.it - info @pergeo.it

SCPTU 3



Prova eseguita da:

Pergeo S.r.l.

via dell'artigianato, 2 44130 - Ro Ferrarese

www.pergeo.it - info @pergeo.it

Dir. del Laboratorio: Dr. Geol. M. Condotta

Sperimentatore: Dr. Geol. F. Zanella

Committente: Comune di Ravenna

ID Prova: SCPTU 3

Profondità massima raggiunta: 30,00 mt

Cantiere: Piazzale Kennedy (RA)

Profondità falda: mt 2 da p.c.

Punta sismica: Tecnopenta G1-CPL2IN - SISMI

Data: 22/03/2013

Preforo: 1,20 mt scavo + fino a mt 7,00 di dpsh

n° Dissipazioni eseguite: 0

Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz	Prof.	RP	RL	PN	Incl.	Vavanz
metri	Mpa	KPa	KPa	Gradi *	cm/sec	metri	Mpa	KPa	KPa	Gradi *	cm/sec	metri	Mpa	KPa	KPa	Gradi *	cm/sec	metri	Mpa	KPa	KPa	Gradi *	cm/sec	metri	Mpa	KPa	KPa	Gradi *	cm/sec
24.700	19.378	85.479	218.800	2.965	2.120	26.340	2.079	37.043	644.930	3.061	2.010	27.980	1.859	57.356	560.680	3.211	2.250	29.640	2.495	62.380	395.840	3.409	2.090	29.640	2.495	62.380	395.840	3.409	2.090
24.720	19.279	90.248	222.460	2.971	2.130	26.360	1.983	42.710	558.240	3.081	2.090	28.020	2.062	62.865	453.230	3.213	2.030	29.660	2.325	60.380	393.400	3.417	2.040	29.660	2.325	60.380	393.400	3.417	2.040
24.740	19.023	98.467	223.680	2.979	2.060	26.380	1.813	43.154	351.890	3.066	2.080	28.040	1.989	65.869	433.690	3.234	2.010	29.680	2.208	56.269	389.740	3.434	2.060	29.680	2.208	56.269	389.740	3.434	2.060
24.760	18.628	105.129	222.460	3.003	2.090	26.400	1.665	47.936	366.540	3.066	2.070	28.060	1.924	68.865	420.260	3.205	2.010	29.700	2.208	53.158	398.290	3.434	2.070	29.700	2.208	53.158	398.290	3.434	2.070
24.780	17.879	113.451	215.140	3.004	2.170	26.420	1.697	46.269	404.390	3.086	2.070	28.080	1.902	71.643	405.610	3.213	2.040	29.720	2.378	59.158	427.590	3.432	2.060	29.720	2.378	59.158	427.590	3.432	2.060
24.800	17.175	115.891	218.800	3.004	2.190	26.440	1.889	40.603	442.240	3.065	2.110	28.100	1.849	75.865	420.260	3.213	2.070	29.740	2.665	61.158	454.450	3.417	2.150	29.740	2.665	61.158	454.450	3.417	2.150
24.820	16.555	117.439	221.240	2.988	2.220	26.460	2.123	38.269	482.530	3.078	2.120	28.120	1.870	77.754	434.920	3.211	2.100	29.760	3.186	66.269	488.640	3.448	2.120	29.760	3.186	66.269	488.640	3.448	2.120
24.840	15.884	115.212	215.140	3.012	2.220	26.480	2.314	40.491	510.620	3.057	2.110	28.140	1.881	78.865	434.920	3.240	2.080	29.780	3.591	74.269	506.950	3.442	2.100	29.780	3.591	74.269	506.950	3.442	2.100
24.860	14.784	113.978	200.480	3.018	2.160	26.500	2.474	43.825	487.420	3.068	2.120	28.160	1.881	78.420	442.240	3.241	2.030	29.800	4.101	86.603	271.300	3.440	2.110	29.800	4.101	86.603	271.300	3.440	2.110
24.880	12.857	112.530	190.720	3.028	2.190	26.520	2.559	49.269	419.040	3.066	2.090	28.180	1.880	77.083	443.460	3.243	2.040	29.820	4.772	88.825	105.250	3.440	2.090	29.820	4.772	88.825	105.250	3.440	2.090
24.900	11.162	96.347	226.120	3.047	3.470	26.540	2.782	51.158	334.790	3.060	2.120	28.200	1.848	76.194	436.140	3.248	2.050	29.840	4.846	83.603	97.920	3.449	2.090	29.840	4.846	83.603	97.920	3.449	2.090
24.920	9.588	102.235	201.700	3.039	2.040	26.560	2.899	60.825	348.220	3.052	2.130	28.220	1.846	74.079	420.260	3.243	2.030	29.860	4.612	68.491	90.590	3.442	2.180	29.860	4.612	68.491	90.590	3.442	2.180
24.940	9.130	112.791	199.260	3.051	2.000	26.580	2.963	72.158	240.780	3.053	2.080	28.240	1.857	74.635	416.600	3.251	2.060	29.880	4.080	58.047	82.050	3.434	2.080	29.880	4.080	58.047	82.050	3.434	2.080
24.960	9.972	122.684	213.910	3.059	1.990	26.600	2.857	68.380	244.440	3.053	2.110	28.260	1.878	75.746	422.710	3.263	2.020	29.900	3.600	57.376	66.170	3.434	2.050	29.900	3.600	57.376	66.170	3.434	2.050
24.980	11.066	131.791	191.940	3.069	1.940	26.620	2.750	59.269	271.300	3.066	2.120	28.280	1.907	72.849	412.940	3.255	2.030	29.920	3.313	61.043	79.600	3.434	2.150	29.920	3.313	61.043	79.600	3.434	2.150
25.000	9.045	145.235	268.620	3.061	2.050	26.640	2.846	59.158	303.050	3.069	2.160	28.300	1.865	73.182	398.290	3.279	2.110	29.940	3.398	63.154	99.140	3.434	2.160	29.940	3.398	63.154	99.140	3.434	2.160
25.020	8.584	153.347	272.450	3.074	2.100	26.660	3.027	59.603	332.350	3.067	2.180	28.320	1.800	76.178	382.410	3.279	2.130	29.960	3.632	64.599	108.910	3.439	2.190	29.960	3.632	64.599	108.910	3.439	2.190
25.040	3.830	147.005	3110.980	3.059	2.130	26.680	3.133	57.491	389.740	3.058	2.180	28.340	1.789	78.956	376.310	3.259	2.110	29.980	4.015	65.376	117.460	3.430	2.170	29.980	4.015	65.376	117.460	3.430	2.170
25.060	2.574	115.783	341.750	3.067	2.060	26.700	3.240	55.603	461.780	3.051	2.120	28.360	1.788	80.063	370.200	3.276	2.080	30.000	4.536	64.043	126.000	3.431	2.130	30.000	4.536	64.043	126.000	3.431	2.130
25.080	1.764	106.223	321.120	3.071	2.040	26.720	3.261	63.825	268.860	3.075	2.190	28.380	1.777	80.841	373.870	3.288	2.030												
25.100	1.454	107.108	337.110	3.063	2.060	26.740	3.378	81.714	262.750	3.067	2.150	28.400	1.744	79.503	366.540	3.292	2.050												
25.120	1.272	100.327	393.400	3.074	2.040	26.760	3.781	83.710	338.460	3.076	2.180	28.420	1.776	78.615	365.320	3.290	2.060												
25.140	1.175	85.989	495.970	3.092	2.040	26.780	4.557	79.265	515.500	3.076	2.190	28.440	1.786	80.059	361.660	3.282	2.080												
25.160	1.172	82.870	519.160	3.071	2.040	26.800	5.334	88.710	162.630	3.097	2.090	28.460	1.753	82.388	357.990	3.290	2.060												
25.180	1.172	81.315	527.710	3.086	1.990	26.820	5.153	107.487	130.890	3.078	2.110	28.480	1.742	81.611	356.770	3.314	2.080												
25.200	1.171	74.866	526.490	3.074	2.050	26.840	4.375	89.595	119.900	3.097	2.200	28.500	1.729	80.380	347.000	3.318	2.090												
25.220	1.170	53.751	521.610	3.099	2.090	26.860	3.747	65.372	126.000	3.114	2.250	28.520	1.697	79.936	342.120	3.314	2.150												
25.240	1.159	34.862	513.060	3.099	2.100	26.880	3.354	65.261	171.180	3.124	2.280	28.540	1.685	79.599	342.120	3.296	2.090												
25.260	1.148	25.751	505.730	3.091	2.090	26.900	3.088	73.928	234.670	3.106	2.240	28.560	1.664	78.376	343.340	3.296	2.100												
25.280	1.147	24.303	498.410	3.094	2.030	26.920	2.906	72.591	284.730	3.106	2.190	28.580	1.653	75.821	340.900	3.326	2.090												
25.300	1.148	24.307	491.080	3.099	2.020	26.940	3.450	110.039	179.730	3.108	2.300	28.600	1.620	75.039	339.680	3.318	2.150												
25.320	1.159	25.418	489.860	3.101	2.030	26.960	3.162	109.595	174.840	3.114	1.970	28.620	1.577	75.039	343.340	3.318	2.120												
25.340	1.180	26.307	487.420	3.102	2.040	26.980	3.184	116.039	205.370	3.124	2.050	28.640	1.556	75.039	357.990	3.328	2.060												
25.360	1.256	27.311	491.080	3.107	2.060	27.000	3.716	128.595	310.370	3.124	1.990	28.660	1.555	73.257	367.760	3.336	2.090												
</																													



www.pergeo.it - info@pergeo.it

SCPTU 3




Prova eseguita da:
Pergeo S.r.l.
via dell'artigianato, 2 44130 - Ro Ferrarese
www.pergeo.it - info@pergeo.it
Dir.del Laboratorio: Dr.Geol.M.Condotta
Sperimentatore: Dr.Geol. F. Zanella

Committente: Comune di Ravenna
Cantiere: Piazzale Kennedy (RA)
Data: 22/03/2013

ID Prova: SCPTU 3
Profondità falda: mt 2 da p.c.
Preforo: 1,20 mt scavo + fino a mt 7,00 di dpsh

Profondità massima raggiunta: 30,00 mt
Punta sismica: Tecnopenta G1-CPL2IN - SISMI
n° Dissipazioni eseguite: 0

GRAFICI PROVA SCPTU 3

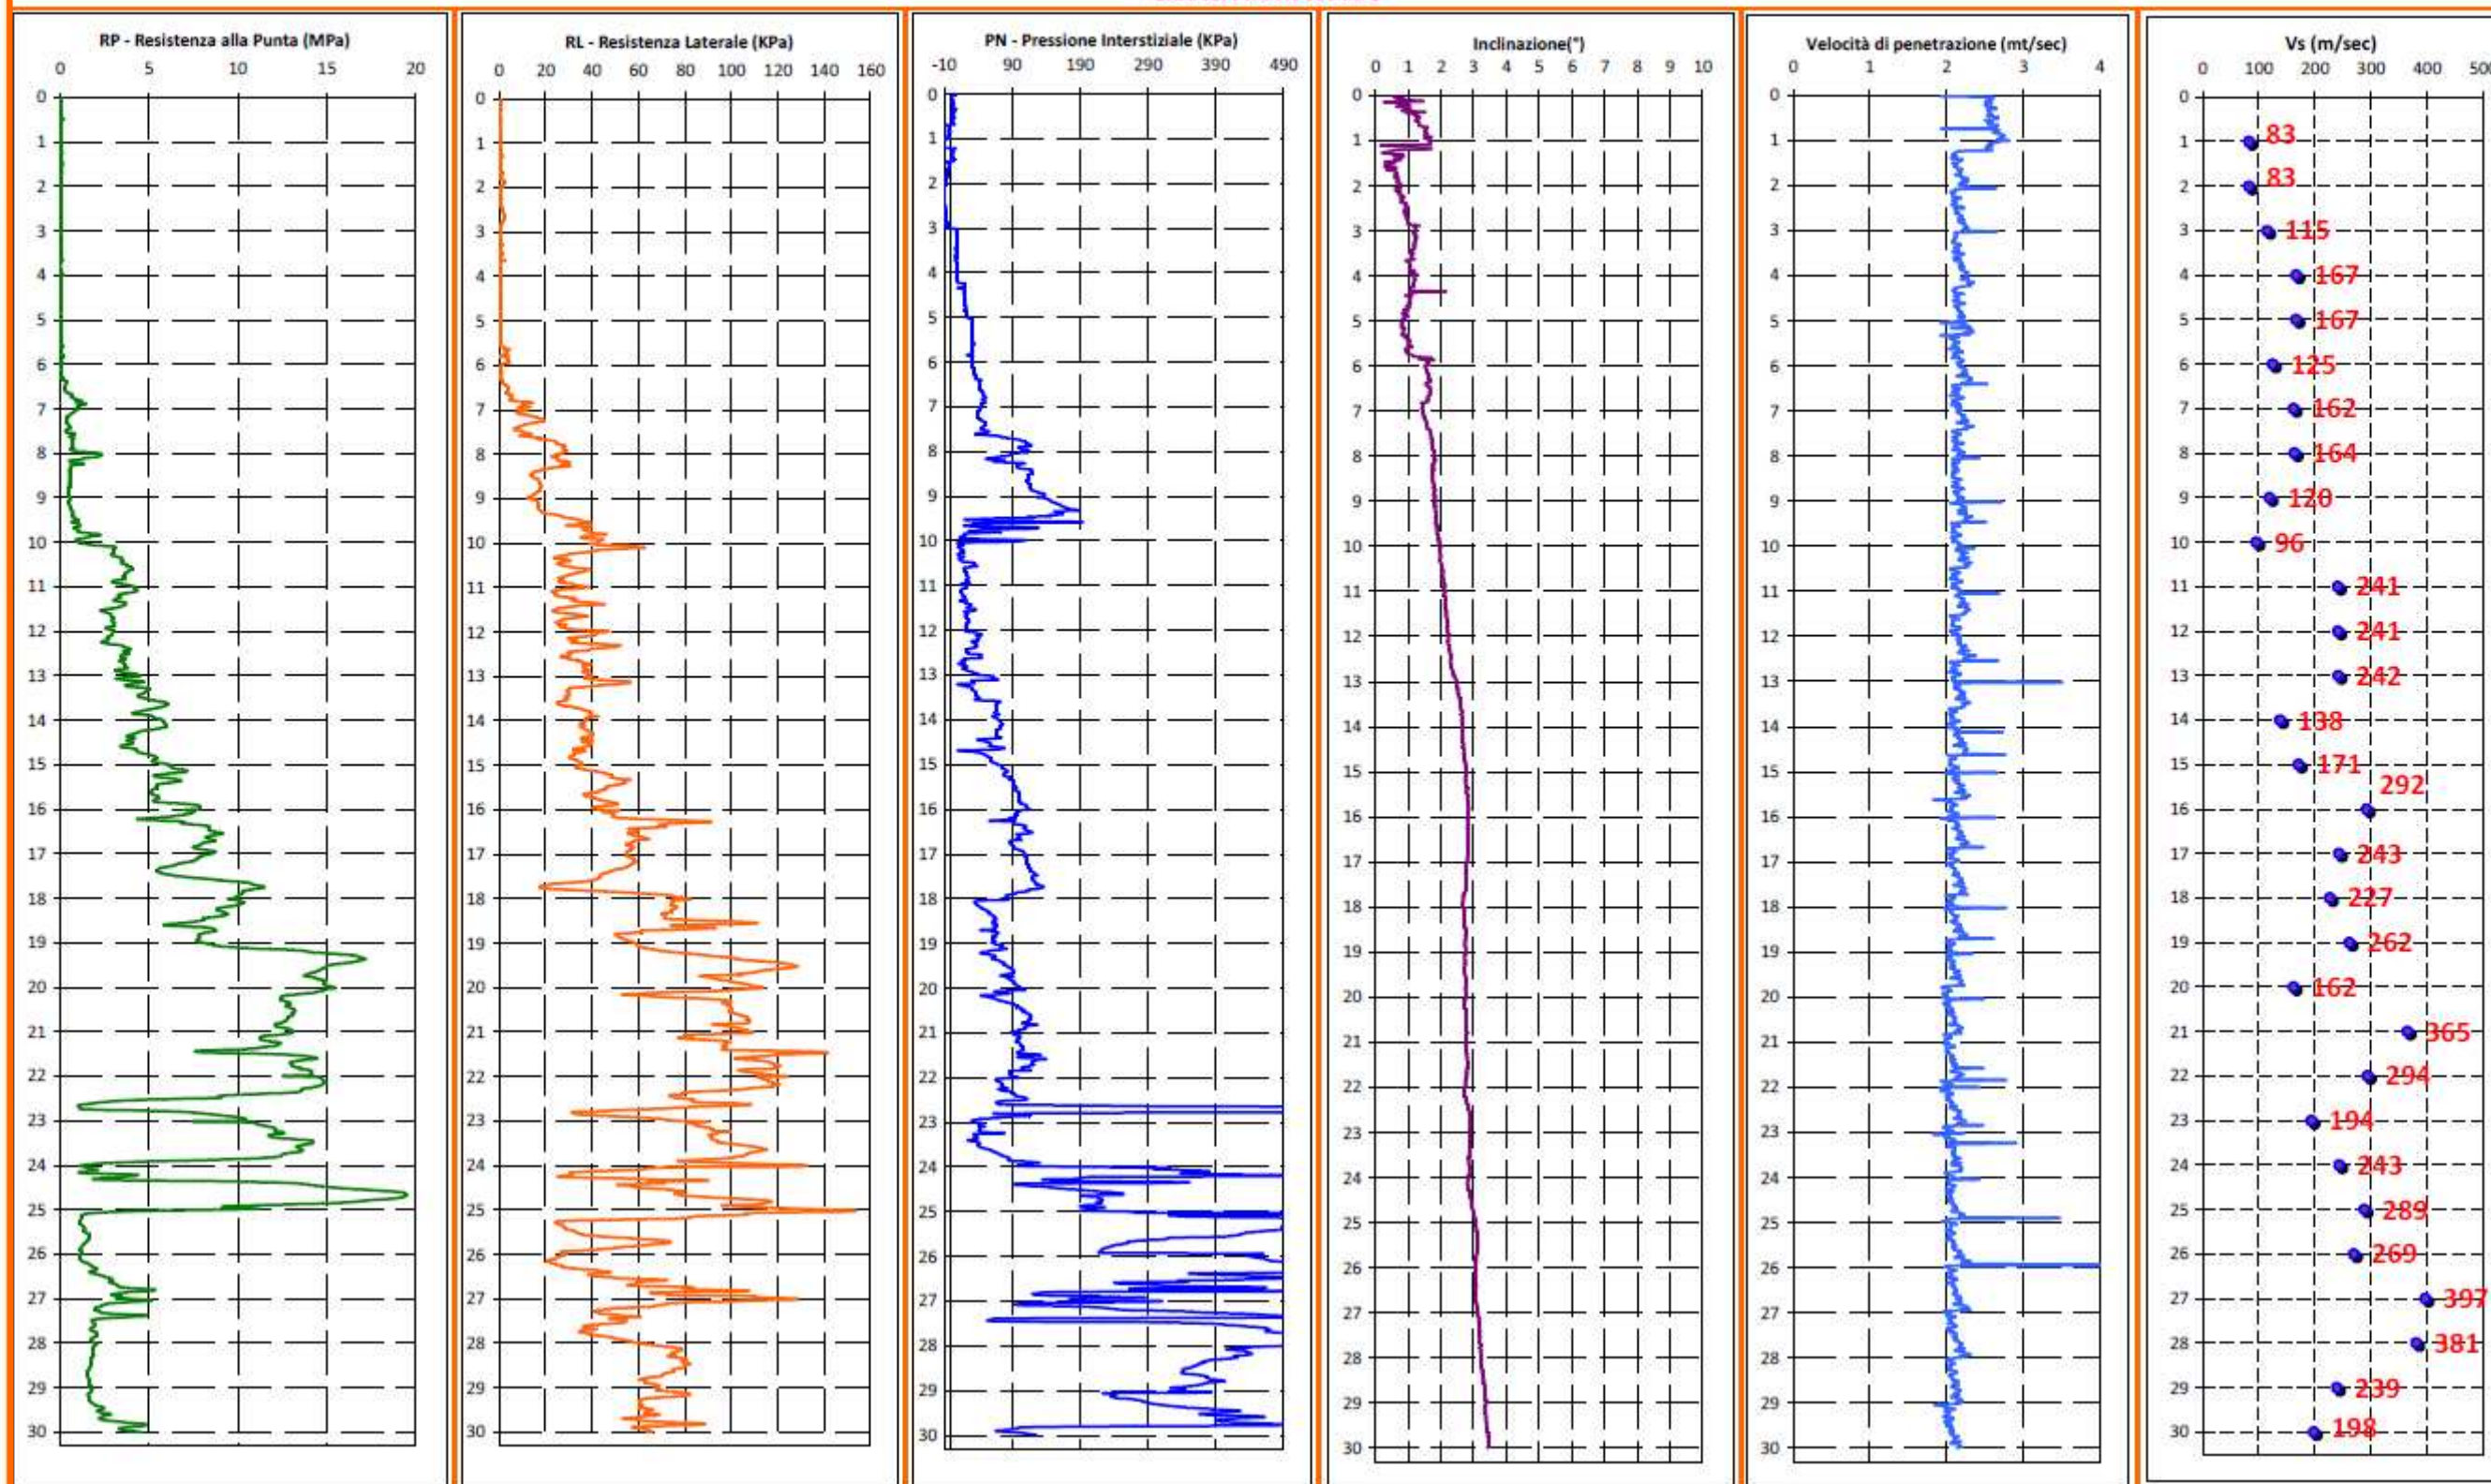

Committente: Comune di Ravenna
Cantiere: Piazzale Kennedy (RA)
Data: 22/03/2013

ID Prova: SCPTU 3
Profondità falda: mt 2 da p.c.
Preforo: 1,20 mt scavo + fino a mt 7,00 di dps

Profondità massima raggiunta: 30,00 mt
Punta sismica: Tecnopenta G1-CPL2IN - SISMI
n° Dissipazioni eseguite: 0

Vs 30 e ANAGRAFICA PROVA SCPTU 3

prof. (p)	prof.(cs)	Dist (L)	Tempo (t)	VsP	L2-L1	t2-t1	VsL			Vs30
m	m	m	sec	m/sec	m	sec	m/sec			
0,00										
1,00							83	1,00	0,01205	
2,00							83	1,00	0,01205	
3,00							115	1,00	0,00870	
4,00							167	1,00	0,00599	
5,00							167	1,00	0,00599	
6,00							125	1,00	0,00800	
7,00							162	1,00	0,00617	
8,00	7,70	7,87	0,0482	164	7,87	0,0482	164	1,00	0,00612	
9,00	8,70	8,86	0,0564	157	8,86	0,0564	157	1,00	0,00836	
10,00	9,70	9,84	0,0666	148	9,84	0,0666	148	1,00	0,01041	
11,00	10,70	10,83	0,0707	153	10,83	0,0707	153	1,00	0,00415	
12,00	11,70	11,82	0,0748	158	11,82	0,0748	158	1,00	0,00414	
13,00	12,70	12,81	0,0789	162	12,81	0,0789	162	1,00	0,00414	
14,00	13,70	13,80	0,0861	160	13,80	0,0861	160	1,00	0,00724	
15,00	14,70	14,79	0,0919	161	14,79	0,0919	161	1,00	0,00585	
16,00	15,70	15,79	0,0953	166	15,79	0,0953	166	1,00	0,00342	
17,00	16,70	16,78	0,0994	169	16,78	0,0994	169	1,00	0,00412	
18,00	17,70	17,78	0,1038	171	17,78	0,1038	171	1,00	0,00441	
19,00	18,70	18,77	0,1076	174	18,77	0,1076	174	1,00	0,00382	
20,00	19,70	19,77	0,1137	174	19,77	0,1137	174	1,00	0,00617	
21,00	20,70	20,77	0,1165	178	20,77	0,1165	178	1,00	0,00274	
22,00	21,70	21,76	0,1199	182	21,76	0,1199	182	1,00	0,00340	
23,00	22,70	22,76	0,1250	182	22,76	0,1250	182	1,00	0,00516	
24,00	23,70	23,76	0,1291	184	23,76	0,1291	184	1,00	0,00411	
25,00	24,70	24,76	0,1326	187	24,76	0,1326	187	1,00	0,00347	
26,00	25,70	25,75	0,1363	189	25,75	0,1363	189	1,00	0,00371	
27,00	26,70	26,75	0,1388	193	26,75	0,1388	193	1,00	0,00252	
28,00	27,70	27,75	0,1414	196	27,75	0,1414	196	1,00	0,00263	
29,00	28,70	28,75	0,1456	197	28,75	0,1456	197	1,00	0,00418	
30,00	29,70	29,75	0,1506	197	29,75	0,1506	197	1,00	0,00505	
										178

prof. (p): profondità piezocono

prof.(cs): profondità cono sismico

D1: distanza fra la sorgente del rumore S - geofono triassiale (L)

Tempo (t): tempo d'arrivo dell'onda a S

VsP: velocità del suono nel percorso fra S ed L - Vs puntuale alla profondità

VsL: velocità del suono nel percorso fra S ed L

VsL: Vs per ogni livello (L2 - L1)/(t2 - t1)

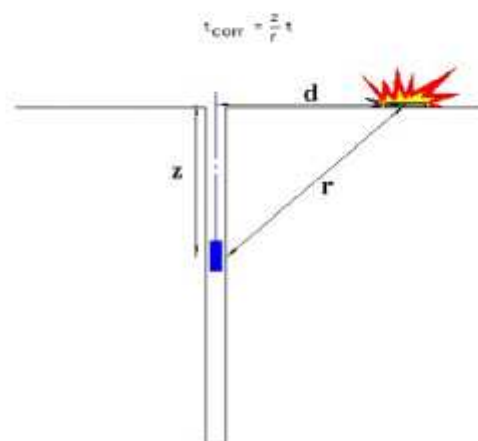


Figura 1 - Schema di down hole con metodo diretto



Coordinate geografiche:

Latitudine: 44.416860°

Longitudine: 12.197474°

Elevazione: 4-5 m



elletipi s.r.l.

Sede operativa ed am. va: Via Annibale Zucchini, 69 - 44100

tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it

P IVA e Codice Fiscale n. 00174600387

SCPTU2A

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001

Laboratorio aut. dal Ministero Infrastrutture e Trasporti P.C.S. 11-PP. S.T.C. in base al D.P.R. n. 309/01 art. 29, c. 4, n. 44/95 Dec. n. 57302 del 06/05/2005

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi
ANTIERE Polisportivo Darsena - via Marani, Ravenna

PT N° SCPTU 01 **PROF. FALDA (m da p.c.)** 2.30 **TIPO PUNTA** piezocono G1 - CPL2IN
ATA 30/06/11 **PREFORO (m da p.c.)** 0.90 **Lat.** 44.415157°
OMMESSA 9405/11 **C. SITO N°:** S110092 **Long.** 12.211598°

qc	fs	U	Incl.	prof.	qc	fs	U	Incl.	prof.	qc	fs	U	Incl.	prof.	qc	fs	U	Incl.	prof.	qc	fs	U	Incl.	prof.	qc	fs	U	Incl.	prof.	qc	fs	U	Incl.	prof.
Mpa	kPa	kPa	gradi	m	Mpa	kPa	kPa	gradi	m	Mpa	kPa	kPa	gradi	m	Mpa	kPa	kPa	gradi	m	Mpa	kPa	kPa	gradi	m	Mpa	kPa	kPa	gradi	m	Mpa	kPa	kPa	gradi	m
0.19	51.56	9.89	0.46	2.92	0.86	23.42	92.31	1.28	4.92	0.40	6.53	127.72	2.49	6.92	11.35	73.21	64.84	4.54	8.92	7.55	27.32	114.29	5.77	8.92	7.55	27.32	114.29	5.77	8.92	7.55	27.32	114.29	5.77	
0.15	59.12	8.67	0.49	2.94	0.86	25.86	91.09	1.29	4.94	0.41	6.42	130.16	2.49	6.94	12.31	70.54	67.28	4.55	8.94	7.73	32.54	114.90	5.79	8.94	7.73	32.54	114.90	5.79	8.94	7.73	32.54	114.90	5.79	
0.20	60.56	12.33	0.52	2.96	0.89	27.19	101.47	1.31	4.96	0.44	6.75	132.60	2.49	6.96	13.66	69.09	70.33	4.59	8.96	7.94	38.88	115.51	5.80	8.96	7.94	38.88	115.51	5.80	8.96	7.94	38.88	115.51	5.80	
0.38	65.34	12.33	0.53	2.98	0.91	29.42	117.34	1.30	4.98	0.45	7.42	134.43	2.56	6.98	14.39	70.20	63.00	4.56	8.98	8.20	42.43	116.73	5.83	8.98	8.20	42.43	116.73	5.83	8.98	8.20	42.43	116.73	5.83	
0.40	75.79	10.50	0.52	3.00	0.95	27.09	121.00	1.30	5.00	0.64	7.53	139.93	2.56	7.00	14.58	68.98	61.64	4.63	9.00	8.42	46.21	118.56	5.83	9.00	8.42	46.21	118.56	5.83	9.00	8.42	46.21	118.56	5.83	
0.44	78.79	9.28	0.47	3.02	0.99	24.53	119.17	1.37	5.02	2.21	7.64	155.19	2.55	7.02	14.48	70.31	34.31	4.62	9.02	8.49	49.10	119.78	5.85	9.02	8.49	49.10	119.78	5.85	9.02	8.49	49.10	119.78	5.85	
4.24	44.95	0.73	0.48	3.04	0.99	25.64	117.95	1.32	5.04	4.81	9.64	133.21	2.57	7.04	14.12	68.08	36.75	4.63	9.04	8.46	50.99	120.39	5.85	9.04	8.46	50.99	120.39	5.85	9.04	8.46	50.99	120.39	5.85	
4.04	54.61	0.73	0.42	3.06	0.94	23.53	116.12	1.34	5.06	5.90	10.08	115.51	2.57	7.06	13.58	67.64	38.58	4.63	9.06	8.28	53.54	119.78	5.86	9.06	8.28	53.54	119.78	5.86	9.06	8.28	53.54	119.78	5.86	
3.95	58.50	1.95	0.52	3.08	0.87	25.76	110.01	1.37	5.08	6.11	9.53	113.68	2.58	7.08	12.80	71.41	40.42	4.66	9.08	8.06	56.10	119.17	5.86	9.08	8.06	56.10	119.17	5.86	9.08	8.06	56.10	119.17	5.86	
4.18	53.17	1.95	0.48	3.10	0.86	31.20	106.96	1.40	5.10	6.05	8.97	111.23	2.57	7.10	11.83	79.30	41.03	4.67	9.10	7.78	58.54	118.56	5.86	9.10	7.78	58.54	118.56	5.86	9.10	7.78	58.54	118.56	5.86	
4.45	55.50	3.17	0.49	3.12	0.84	36.65	105.74	1.38	5.12	5.97	11.08	109.40	2.58	7.12	11.22	84.63	42.86	4.71	9.12	7.53	59.54	117.95	5.90	9.12	7.53	59.54	117.95	5.90	9.12	7.53	59.54	117.95	5.90	
4.46	54.95	1.95	0.53	3.14	0.84	41.54	106.96	1.39	5.14	5.90	13.08	107.57	2.59	7.14	10.75	91.51	44.08	4.71	9.14	7.24	60.43	117.34	5.91	9.14	7.24	60.43	117.34	5.91	9.14	7.24	60.43	117.34	5.91	
4.47	54.39	0.73	0.56	3.16	0.83	44.88	106.96	1.41	5.16	5.40	16.86	102.08	2.60	7.16	9.68	82.68	55.68	4.72	9.16	6.80	51.53	114.90	5.92	9.16	6.80	51.53	114.90	5.92	9.16	6.80	51.53	114.90	5.92	
4.07	84.94	3.17	0.42	3.18	0.79	45.55	106.96	1.45	5.18	4.57	19.75	91.09	2.60	7.18	9.46	86.13	53.85	4.73	9.18	6.68	51.64	111.84	5.92	9.18	6.68	51.64	111.84	5.92	9.18	6.68	51.64	111.84	5.92	
4.20	96.28	3.17	0.48	3.20	0.73	38.04	89.26	1.42	5.20	4.00	27.31	84.37	2.62	7.20	9.03	87.02	53.24	4.76	9.20	6.43	52.19	109.40	5.93	9.20	6.43	52.19	109.40	5.93	9.20	6.43	52.19	109.40	5.93	
4.33	107.61	3.17	0.54	3.22	0.73	35.26	89.87	1.41	5.22	3.63	33.75	79.49	2.63	7.22	8.59	87.79	52.63	4.72	9.22	6.11	53.08	106.96	5.91	9.22	6.11	53.08	106.96	5.91	9.22	6.11	53.08	106.96	5.91	
4.46	118.94	3.17	0.60	3.24	0.73	32.82	91.09	1.45	5.24	3.37	38.42	75.82	2.63	7.24	8.55	84.13	52.63	4.76	9.24	5.80	52.42	104.52	5.96	9.24	5.80	52.42	104.52	5.96	9.24	5.80	52.42	104.52	5.96	
4.48	130.05	3.79	0.53	3.26	0.71	31.48	95.36	1.45	5.26	3.80	45.20	77.66	2.66	7.26	8.93	80.68	53.85	4.79	9.26	5.54	51.64	103.91	5.97	9.26	5.54	51.64	103.91	5.97	9.26	5.54	51.64	103.91	5.97	
4.58	150.39	3.79	0.59	3.28	0.71	30.59	103.30	1.46	5.28	4.41	55.31	79.49	2.66	7.28	10.01	72.46	55.68	4.80	9.28	5.30	49.97	102.08	5.98	9.28	5.30	49.97	102.08	5.98	9.28	5.30	49.97	102.08	5.98	
4.49	168.50	3.79	0.57	3.30	0.71	29.15	122.22	1.47	5.30	5.33	53.53	73.99	2.68	7.30	10.78	65.24	56.90	4.80	9.30	4.92	49.31	100.24	5.98	9.30	4.92	49.31	100.24	5.98	9.30	4.92	49.31	100.24	5.98	
4.35	175.94	3.79	0.55	3.32	0.74	26.93	128.33	1.47	5.32	5.92	45.64	70.94	2.70	7.32	10.97	60.12	56.90	4.80	9.32	4.52	49.19	98.41	5.98	9.32	4.52	49.19	98.41	5.98	9.32	4.52	49.19	98.41	5.98	
4.46	189.49	3.79	0.57	3.34	0.71	24.82	124.66	1.49	5.34	6.27	41.31	72.16	2.69	7.34	10.61	59.34	55.68	4.80	9.34	4.29	49.08	97.19	6.02	9.34	4.29	49.08	97.19	6.02	9.34	4.29	49.08	97.19	6.02	
4.62	217.72	1.34	0.60	3.36	0.69	22.94	118.56	1.48	5.36	6.51	35.31	73.38	2.71	7.36	10.02	60.01	55.07	4.81	9.36	4.34	48.53	99.02	6.02	9.36	4.34	48.53	99.02	6.02	9.36	4.34	48.53	99.02	6.02	
4.49	217.05	1.10	0.56	3.38	0.63	22.82	116.12	1.51	5.38	6.52	30.97	73.99	2.69	7.38	9.86	57.34	55.07	4.85	9.38	4.65	47.97	102.69	6.00	9.38	4.65	47.97	102.69	6.00	9.38	4.65	47.97	102.69	6.00	
4.51	233.71	2.32	0.57	3.40	0.58	23.27	111.84	1.55	5.40	6.55	29.31	72.16	2.71	7.40	9.97	56.90	55.68	4.87	9.40	4.86	46.53	103.61	6.03	9.40	4.86	46.53	103.61	6.03	9.40	4.86	46.53	103.61	6.03	
4.53	250.38	3.55	0.58	3.42	0.62	23.82	111.23	1.51	5.42	6.21	27.86	72.16	2.69	7.42	10.03	59.11	57.51	4.88	9.42	4.81	45.53	101.09	6.04	9.42	4.81	45.53	101.09	6.04	9.42	4.81	45.53	101.09	6.04	
4.50	255.60	3.55	0.62	3.44	0.60	25.83	110.62	1.55	5.44	6.21	31.63	72.77	2.69	7.44	9.89	62.11	56.29	4.87	9.44	4.71	42.86	61.78	6.04	9.44	4.71	42.86	61.78	6.04	9.44	4.71	42.86	61.78	6.04	
4.39	260.15	3.55	0.58	3.46	0.58	27.61	113.68	1.56	5.46	5.96	30.96	71.55	2.62	7.46	9.81	64.45	53.24	4.88	9.46	4.54	39.53	33.70	6.09	9.46	4.54	39.53	33.70	6.09	9.46	4.54	39.53	33.70	6.09	
4.42	273.93	4.77	0.58	3.48	0.59	27.94	115.51	1.54	5.48	6.32	30.19	69.11	2.67	7.48	9.75	64.56	54.46	4.90	9.48	4.07	35.52	36.75	6.08	9.48	4.07	35.52	36.75	6.08	9.48	4.07	35.52	36.75	6.08	
4.25	278.26	5.99	0.63	3.50	0.58	27.16	117.95	1.54	5.50	6.40	28.96	70.33	2.66	7.50	9.37	62.55	53.85	4.91	9.50	3.30	23.52	36.75	6.05	9.50	3.30	23.52	36.75	6.05	9.50	3.30	23.52	36.75	6.05	
4.04	282.92	7.21	0.64	3.52	0.60	24.61	122.22	1.61	5.52	5.39	42.41	68.50	2.67	7.52	9.03	60.55	53.24	4.92	9.52	2.46														



elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
Tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P.IVA e Codice Fiscale n. 00174600387

Laboratorio aut. dal Ministero Infrastrutture e Trasporti P.C.S. ILPR S.T.C. in base al DPR n. 3800/01 art. 58 con n. 3490/02 del 05/05/2005

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001



elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
Tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P.IVA e Codice Fiscale n. 00174600387

Laboratorio aut. dal Ministero Infrastrutture e Trasporti P.C.S. ILPR S.T.C. in base al DPR n. 3800/01 art. 58 con n. 3490/02 del 05/05/2005

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi
CANTIERE Polisportivo Darsena - via Marani, Ravenna
CPT N° SCPTU 01 PROF. FALDA (m da p.c.) 2.30 TIPO PUNTA piezocono G1 - CPL2IN
DATA 30/06/11 PREFORO (m da p.c.) 0.90 Lat. 44.415157°
COMMESSA 9405/11 C. SITO N°: S110092 Long. 12.211598°

prof.	qc	fs	U	incl.	prof.	qc	fs	U	incl.	prof.	qc	fs	U	incl.	prof.	qc	fs	U	incl.	prof.	qc	fs	U	incl.	prof.	qc	fs	U	incl.																				
m	Mpa	KPa	KPa	gradi	m	Mpa	KPa	KPa	gradi	m	Mpa	KPa	KPa	gradi	m	Mpa	KPa	KPa	gradi	m	Mpa	KPa	KPa	gradi	m	Mpa	KPa	KPa	gradi																				
10.92	5.69	39.29	55.07	6.89	12.92	6.33	46.04	27.59	8.27	14.92	6.47	45.27	33.70	9.52	16.92	6.74	79.46	108.18	10.87	18.92	11.29	89.64	57.51	12.18	10.94	5.51	37.29	56.29	6.92	12.94	6.29	45.70	28.82	8.27	14.94	6.45	40.38	36.75	9.52	16.94	6.67	80.91	108.18	10.88	18.94	11.27	92.19	60.56	12.18
10.94	5.51	37.29	56.29	6.92	12.94	6.29	45.70	28.82	8.27	14.94	6.45	40.38	36.75	9.52	16.94	6.67	80.91	108.18	10.88	18.94	11.27	92.19	60.56	12.18	10.96	5.21	37.07	56.29	6.91	12.96	6.29	46.04	29.43	8.28	14.96	6.47	40.38	39.80	9.52	16.96	6.68	81.79	106.96	10.89	18.96	11.14	92.63	61.78	12.23
10.98	4.77	37.28	55.68	6.92	12.98	6.31	49.14	30.04	8.28	14.98	6.58	42.82	42.25	9.56	16.98	6.72	83.90	106.35	10.91	18.98	10.90	92.52	63.61	12.23	10.99	4.33	37.28	54.46	6.95	13.00	6.34	52.37	31.26	8.30	15.00	6.79	47.16	44.69	9.54	17.00	6.89	84.12	105.13	10.93	19.00	10.43	89.85	64.22	12.25
11.02	4.00	37.62	53.85	6.96	13.02	6.35	52.14	31.87	8.33	15.02	7.00	50.60	47.13	9.60	17.02	6.61	75.31	137.48	10.93	19.02	9.56	86.52	63.61	12.25	11.04	3.80	37.95	53.24	6.96	13.04	6.32	51.14	31.26	8.34	15.04	7.20	51.49	48.96	9.58	17.04	6.85	76.57	117.34	10.94	19.04	8.01	86.40	59.95	12.25
11.06	3.70	38.28	52.63	6.96	13.06	6.27	49.92	31.26	8.36	15.06	7.35	50.15	102.08	9.58	17.06	6.98	78.53	106.96	10.96	19.06	6.19	86.73	56.29	12.30	11.08	3.70	39.28	49.57	6.98	13.08	6.31	48.47	33.09	8.35	15.08	7.64	53.93	100.24	9.62	17.08	6.82	80.92	104.91	10.98	19.08	6.43	91.51	56.29	12.30
11.10	3.77	39.61	44.69	7.01	13.10	6.34	48.47	33.70	8.36	15.10	7.91	57.60	99.63	9.60	17.10	6.88	83.98	103.91	10.99	19.10	2.14	87.15	147.86	12.32	11.12	3.87	38.50	40.42	7.04	13.12	6.27	48.69	34.31	8.38	15.12	8.05	60.27	97.19	9.62	17.12	6.79	87.98	103.91	10.99	19.12	2.65	83.26	141.76	12.32
11.14	4.05	37.50	36.75	7.03	13.14	6.05	49.25	35.53	8.38	15.14	8.11	63.71	95.36	9.65	17.14	6.74	91.87	105.74	11.00	19.14	2.32	97.71	140.54	12.35	11.16	4.44	35.27	34.31	7.04	13.16	5.92	49.35	36.75	8.41	15.16	8.16	66.38	95.36	9.66	17.16	6.83	93.98	106.35	11.02	19.16	2.05	114.71	141.15	12.35
11.18	4.98	32.16	32.48	7.08	13.18	6.28	51.80	78.27	8.43	15.18	8.23	68.05	95.36	9.66	17.18	6.93	94.42	106.96	11.05	19.18	1.83	123.38	155.19	12.37	11.20	6.09	25.59	37.36	7.10	13.20	6.41	54.91	77.05	8.45	15.20	8.27	69.93	95.97	9.69	17.20	6.93	93.75	106.96	11.05	19.20	1.78	125.71	291.94	12.36
11.22	6.51	26.26	31.26	7.11	13.22	6.33	58.47	76.43	8.45	15.22	8.38	70.82	95.36	9.71	17.22	6.91	91.87	105.74	11.05	19.22	2.16	113.27	364.59	12.40	11.24	6.28	24.82	26.37	7.11	13.24	6.27	62.80	77.05	8.45	15.24	8.43	70.26	95.36	9.73	17.24	6.93	89.09	103.91	11.08	19.24	2.24	95.49	327.96	12.37
11.26	6.08	20.37	25.15	7.14	13.26	6.49	64.14	77.66	8.47	15.26	8.38	71.15	86.81	9.73	17.26	6.96	87.86	102.69	11.08	19.26	2.06	77.38	218.07	12.38	11.28	6.34	21.71	27.59	7.15	13.28	6.45	64.13	75.82	8.46	15.28	8.40	71.93	85.59	9.72	17.28	6.91	85.97	103.30	11.12	19.28	1.74	58.93	188.77	12.41
11.30	7.10	26.04	31.26	7.17	13.30	6.47	62.80	74.60	8.50	15.30	8.59	72.93	87.42	9.77	17.30	6.76	84.53	103.30	11.13	19.30	1.82	52.71	275.46	12.43	11.32	7.81	31.82	30.65	7.17	13.32	6.49	62.80	74.60	8.51	15.32	8.70	74.93	88.64	9.77	17.32	6.95	83.42	105.74	11.15	19.32	2.21	48.38	356.04	12.43
11.34	8.02	41.04	23.93	7.20	13.34	6.49	64.02	73.38	8.51	15.34	8.82	75.71	87.42	9.80	17.34	6.93	82.75	106.35	11.15	19.34	2.30	39.93	249.82	12.44	11.36	8.00	46.48	20.88	7.21	13.36	6.54	63.80	73.38	8.54	15.36	8.85	76.15	88.03	9.82	17.36	6.96	82.41	92.31	11.17	19.36	1.95	43.38	212.58	12.44
11.38	7.73	41.26	20.27	7.23	13.38	6.57	61.91	73.38	8.54	15.38	8.85	77.26	88.64	9.81	17.38	6.99	79.74	86.81	11.21	19.38	1.61	47.38	205.86	12.43	11.40	7.45	29.48	21.49	7.22	13.40	6.56	61.02	73.38	8.57	15.40	8.73	79.04	89.26	9.81	17.40	6.93	76.74	85.59	11.18	19.40	1.38	42.16	237.00	12.46
11.42	7.36	30.15	23.32	7.26	13.42	6.56	61.24	73.39	8.55	15.42	8.61	79.37	90.48	9.85	17.42	6.98	75.30	87.42	11.20	19.42	1.58	34.82	277.90	12.52	11.44	7.28	32.37	25.15	7.27	13.44	6.66	61.91	73.39	8.57	15.44	8.43	80.03	91.09	9.83	17.44	6.96	76.70	91.09	11.21	19.44	2.02	32.93	368.25	12.52
11.46	7.17	38.59	26.98	7.27	13.46	6.78	61.46	73.38	8.58	15.46	8.35	80.37	92.31	9.88	17.46	6.98	77.30	92.92	11.25	19.46	1.90	30.16	257.14	12.52	11.48	7.08	45.83	28.21	7.28	13.48	6.87	61.58	70.94	8.61	15.48	8.32	79.25	93.53	9.88	17.48	6.98	79.96	94.14	11.24	19.48	1.44	31.71	190.60	12.54
11.50	7.08	49.71	30.04	7.30	13.50	6.94	60.80	66.06	8.61	15.50	7.97	78.47	93.53	9.88	17.50	6.91	82.85	95.97	11.24	19.50	1.46	41.05	312.09	12.55	11.52	7.11	49.93	31.26	7.29	13.52	6.81	59.69	61.78	8.64	15.52	7.63	77.47	93.53	9.90	17.52	6.97	88.18	98.41	11.26	19.52	1.42	44.16	396.34	12.57
11.54	7.02	50.93	32.48	7.33	13.54	6.58	58.91	60.56	8.64	15.54	7.26	76.69	93.53	9.94	17.54	6.92	93.18	99.02	11.26	19.54	3.35	44.05	288.89	12.61	11.56	6.76	50.92	33.09	7.33	13.56	6.39	57.02	59.95	8.66	15.56	7.06	75.36	94.75	9.95	17.56	6.95	94.40	99.63	11.27	19.56	3.00	50.83	228.45	12.63
11.58	6.47	49.82	34.31	7.36	13.58	6.32	57.13	61.17	8.64	15.58	7.06	75.91	96.58	9.96	17.58	6.97	94.07	99.63	11.27	19.58	7.95	50.49	275.46	12.65	11.60	6.27	51.04	35.53	7.38	13.60	6.31	56.91	61.78	8.68	15.60	7.27	75.91	99.02	10.00	17.60	6.93	92.63	100.24	11.30	19.60	9.82	56.05	158.24	12.66
11.62	6.17	52.04	36.14	7.38	13.62	6.37	56.91	62.39	8.70	15.62	7.54	73.46	98.41	9.99	17.62	6.93	91.40	100.85	11.31	19.62	10.72	62.38	65.45	12.67	11.64	6.24	53.37	37.36	7.38	13.64	6.37	57.57	63.61	8.70	15.64	7.72	72.02	94.14	10.00	17.64	6.93	91.40	100.85	11.31	19.62	10.72	62.38	65.45	12.67
11.66	6.55	53.70	39.19	7.40	13.66	6.31	57.57	64.22	8.68	15.66	7.90	70.57	89.26	10.02	17.66	6.91	86.62	103.30	11.36	19.66	11.47	46.61	74.60	12.70	11.68	7.08	53.92	41.64	7.41	13.68	6.26	57.13	64.22	8.72	15.68	8.16	69.79	86.81	10.02	17.68	6.93	84.73	105.13	11.36	19.68	11.78	53.49	81.32	12.73
11.70	7.73	54.81	43.47	7.45	13.70	6.31	57.01	65.45	8.72	15.70	8.46	68.01	84.98	10.05	17.70	6.92	83.95	106.35	11.36	19.70	12.11	63.05	87.42	12.76	11.72	8.25	54.92	44.69	7.46	13.72	6.43	56.57	66.67	8.76	15.72	8.66	65.90	83.15	10.05	17.72	6.91	83.84	106.96	11.37	19.72	12.37	70.72	92.31	12.77
11.74	8.62	53.37	45.30	7.47	13.74	6.51	55.90	67.89	8.76	15.74	8.79	65.68	81.32	10.06	17.74	6.93	83.95	109.40	11.39	19.74	12.48	79.83	95																										



elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P IVA e Codice Fiscale n. 00174600387

Laboratorio Aut. del Ministero Infrastrutture e Trasporti P.C.S. U.P.P. S.T.C. in base al D.P.R. n. 380/01 art. 59 circ. n. 34999 Del. n. 53362 del 05/05/2005

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001



elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P IVA e Codice Fiscale n. 00174600387

Laboratorio Aut. del Ministero Infrastrutture e Trasporti P.C.S. U.P.P. S.T.C. in base al D.P.R. n. 380/01 art. 59 circ. n. 34999 Del. n. 53362 del 05/05/2005

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi

CANTIERE

Polisportivo Darsena - via Marani, Ravenna

CPT N° SCPTU 01

PROF. FALDA (m da p.c.) 2.30

TIPO PUNTA piezocono G1 - CPL2IN

DATA 30/06/11


PREFORO (m da p.c.) 0.90

Lat. 44.415157°

COMMESSA 9405/11

C. SITO N°: S110092

Long. 12.211598°

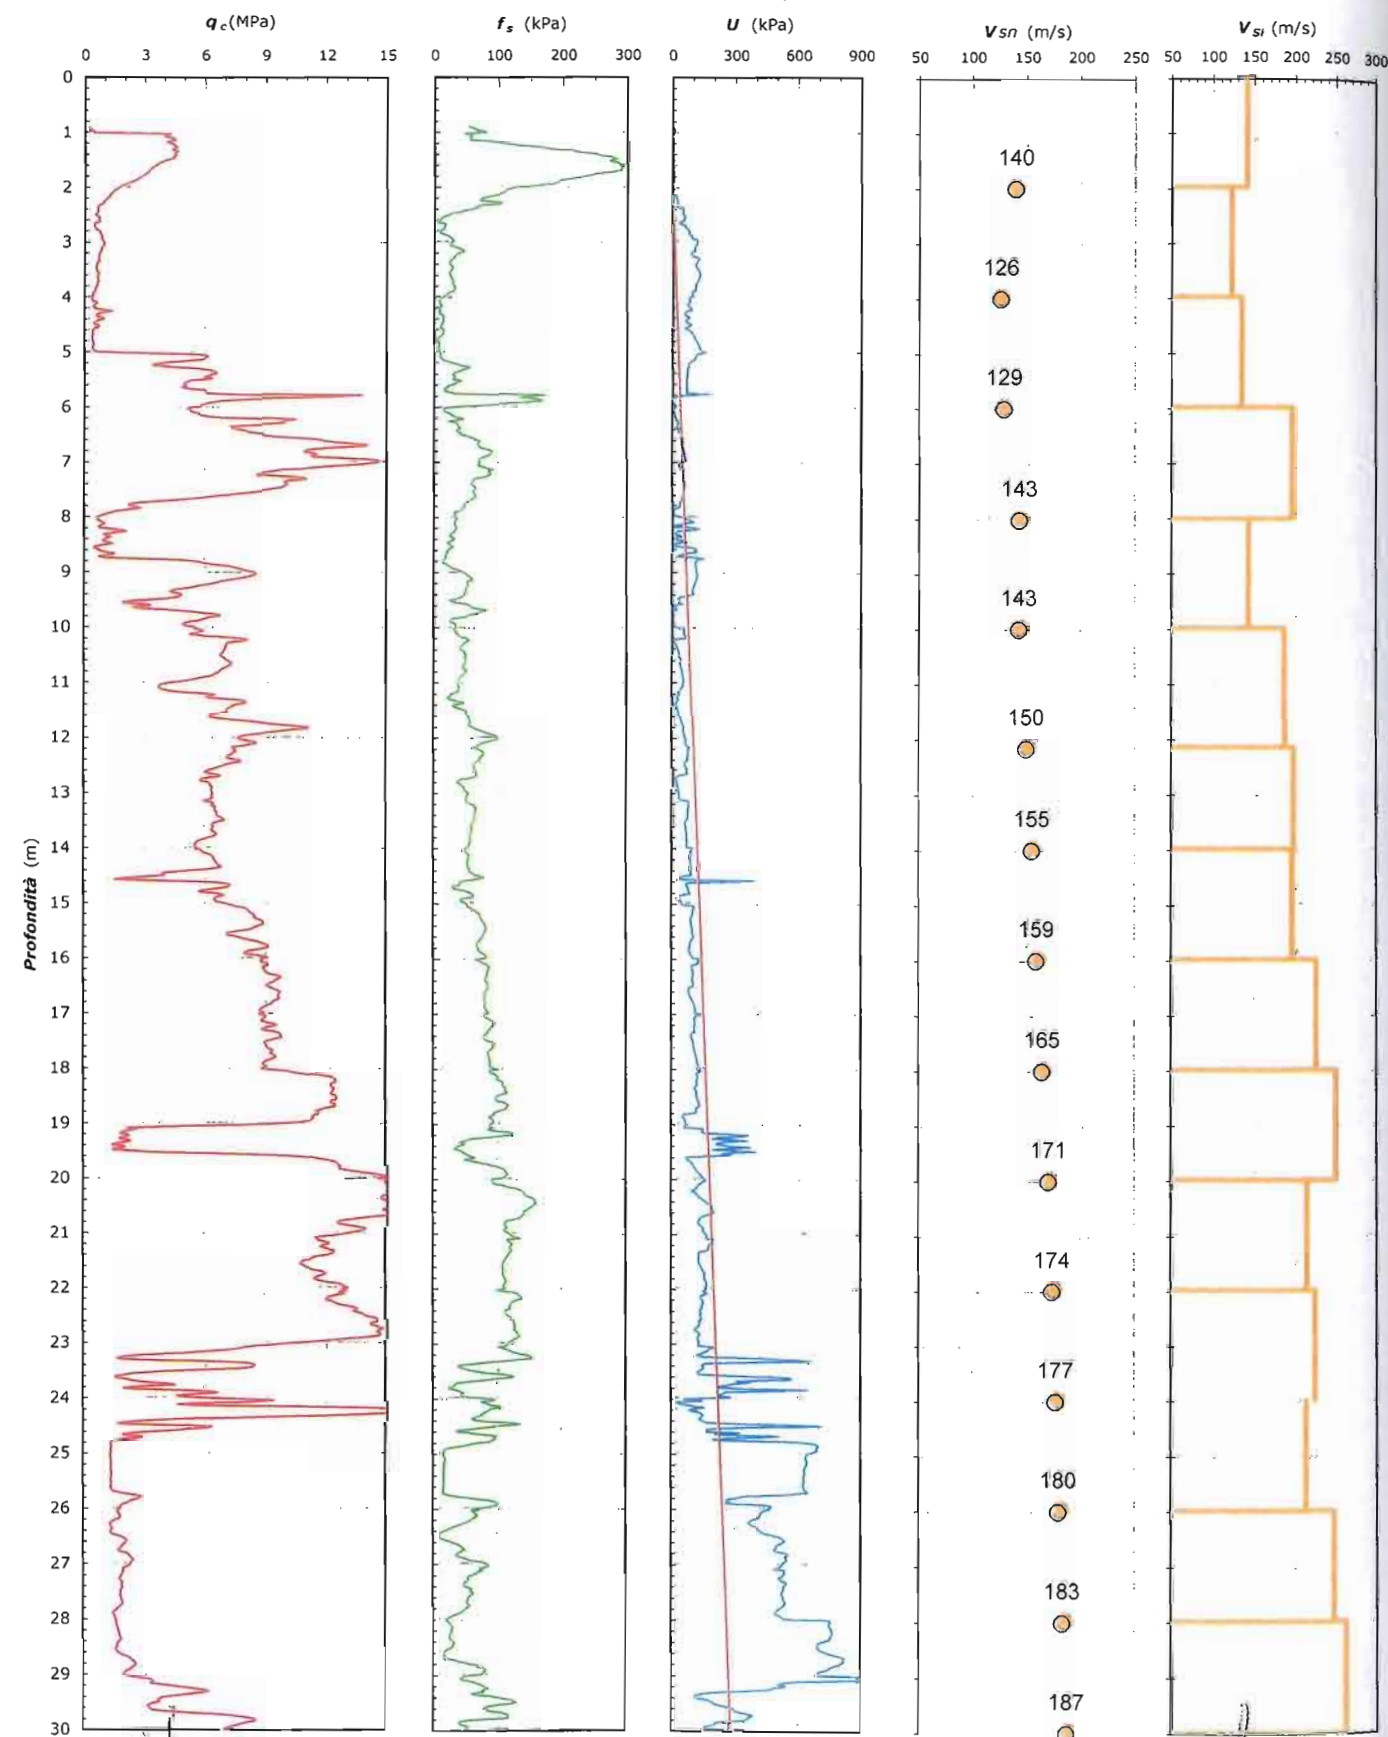

Lo Sperimentatore:
dott. Massimo Romagnoli

S110092_SCPTU 01.xls - pag 4 di 6

Il Direttore Settore Prove in Sito:
dott. geol. Gianluca Ferioli

Lo Sperimentatore:
dott. Massimo Romagnoli

S110092_SCPTU 01.xls - pag 5 di 6

COMMITTENTE

Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi

CANTIERE

Polisportivo Darsena - via Marani, Ravenna

CPT N° SCPTU 01

PROF. FALDA (m da p.c.) 2.30

TIPO PUNTA

piezocono G1 - CPL2IN

DATA 30/06/11

PREFORO (m da p.c.) 0.90

Lat.


44.415157°

COMMESSA 9405/11

C. SITO N°: S110092

Long.

12.211598°

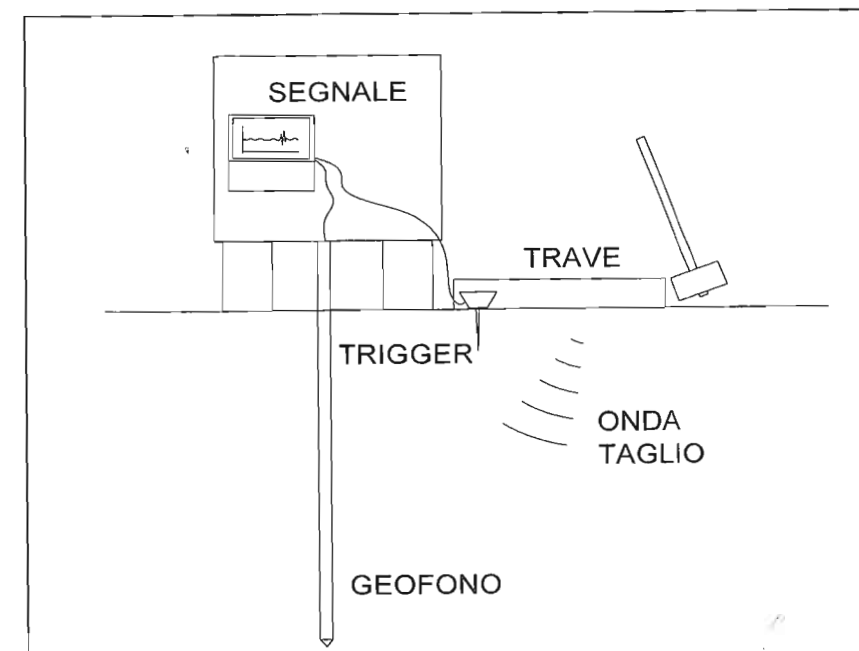

Profondità (m)	Ts (s)	L (m)	Vs (m/s)	Vis (m/s)
1.02	T0	1.43	-	-
2.00	5.77	2.23	140	140
4.00	21.31	4.11	126	121
6.00	35.96	6.06	129	133
8.02	46.18	8.05	143	194
10.00	59.94	10.00	143	142
12.16	71.48	12.13	150	185
14.00	80.81	13.95	155	195
16.00	91.02	15.92	159	193
18.00	99.90	17.89	165	222
20.00	107.89	19.86	171	246
22.00	117.22	21.83	174	211
24.00	126.10	23.79	177	221
26.00	135.42	25.75	180	210
28.00	143.41	27.70	183	245
30.00	150.96	29.66	187	259

CATEGORIA SOTTOSUOLO

C

Vs,30 = 187 m/s

D = Distanza centro trave generatrice ond
Profondità = Profondità punta da piano campagna
Ts = Tempo percorrenza onda di taglio
L = Lunghezza percorso onda di taglio
Vs = Velocità onde di taglio da piano campagna alla profondità indic = 1.00 m
Vis = Velocità onde di taglio nello strato di terreno compreso fra le due profondità indicate

Il Direttore Settore Prove in Sito:
dott. geol. Gianluca Ferioli



elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P IVA e Codice Fiscale n. 00174600387

Laboratorio aut. dal Ministero Infrastrutture e Trasporti P.C.S. 14 PP. S.T.C. in base al D.P.R. n. 380/01 art. 59 c.c.s. n. 349/99 Dec. n. 53362 del 06/05/2005

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001

COMMITTENTE **Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi**

CANTIERE

Polisportivo Darsena - via Marani, Ravenna

CPT N° SCPTU 01

PROF. FALDA (m da p.c.) 2.30

TIPO PUNTA

piezocono G1 - CPL2IN

DATA 30/06/11

PREFORO (m da p.c.) 0.90

Lat.

44.415157°

COMMESSA 9405/11


C. SITO N°: S110092

Long.

12.211598°

UBICAZIONE

Località: Polisportivo Darsena - via Marani, Ravenna

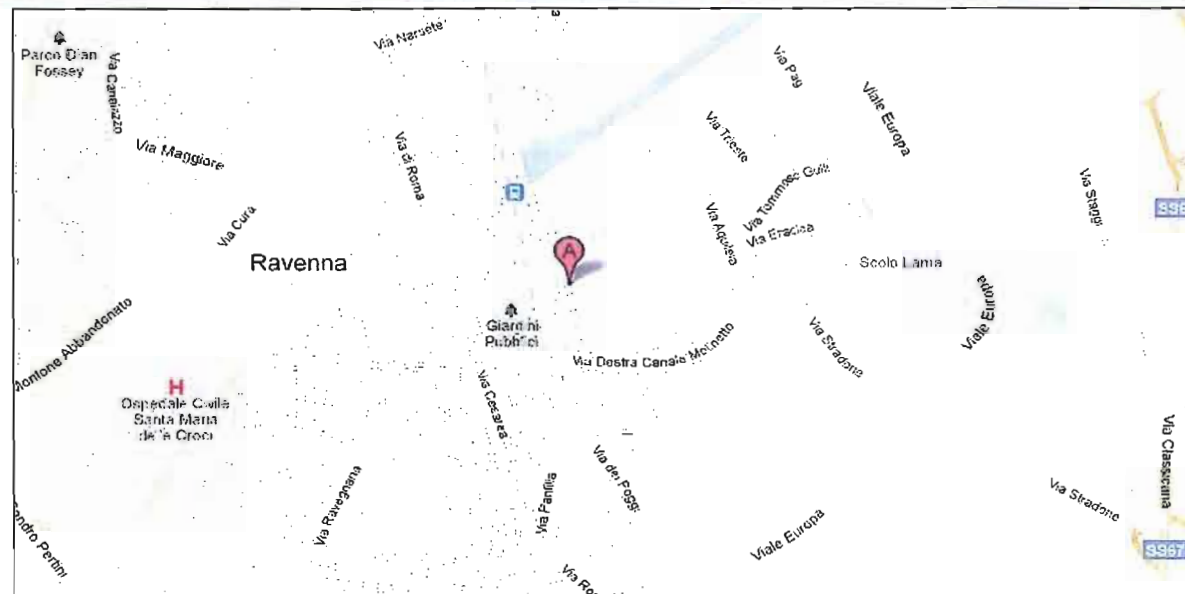

Lo Sperimentatore:
dott. Massimo Romagnoli

S110092_SCPTU 01.xls - pag 6 di 6

Il Direttore Settore Prove in Sito:
dott. geol. Gianluca Ferioli



elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P IVA e Codice Fiscale n. 00174600387

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001

Laboratorio aut. dal Ministero Infrastrutture e Trasporti P.C.S. 14 PP. S.T.C. in base al D.P.R. n. 380/01 art. 59 c.c.s. n. 349/99 Dec. n. 53362 del 06/05/2005

COMMITTENTE **Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi**

CANTIERE

Polisportivo Darsena - via Marani, Ravenna

CPT N° SCPTU 01

PROF. FALDA (m da p.c.) 2.30

TIPO PUNTA

piezocono G1 - CPL2IN

DATA 30/06/11

PREFORO (m da p.c.) 0.90

Lat.

44.415157°

COMMESSA 9405/11

Long.

12.211598°

Prof. (m)	Prof. media	Pot. strato	Litologia	q _c media	γ'	σ' _{vo}	C _u media	Φ' (1)	Φ (2)
da	a	(m)		(kg/cm ²)	(t/m ³)	(kg/cm ²)	(kg/cm ²)	(gradi)	(gradi)
0.00	1.02	0.51	torbe	2.8751901	0.7-1.3	0.13	0.2	-	-
1.02	1.16	1.09	sabbie limose	41.7	1.3-1.8	0.16	-	41	35
1.16	1.30	1.23	limi e limi sabbiosi	42.9	1.3-1.8	0.18	2.8	41	34
1.30	1.40	1.35	limi argillosi e argille limose	44.0	1.3-1.8	0.20	2.9	-	-
1.40	1.46	1.43	argille	43.9	0.7-1.3	0.21	2.9	-	-
1.46	2.46	1.96	torbe	20.9	0.4-0.8	0.39	1.4	-	-
2.46	2.52	2.49	argille	5.4	0.4-0.8	0.38	0.3	-	-
2.52	2.54	2.53	limi argillosi e argille limose	6.6	0.8-1.1	0.38	0.4	-	-
2.54	2.66	2.60	limi e limi sabbiosi	6.7	0.8-1.1	0.40	0.4	<32	22
2.66	2.70	2.68	argille	4.7	0.4-0.8	0.40	0.3	-	-
2.70	2.78	2.74	limi argillosi e argille limose	5.3	0.8-1.1	0.41	0.3	-	-
2.78	2.88	2.83	limi e limi sabbiosi	7.7	0.8-1.1	0.42	0.5	<32	23
2.88	3.10	2.99	limi argillosi e argille limose	8.9	0.8-1.1	0.45	0.6	-	-
3.10	3.30	3.20	argille	7.5	0.4-0.8	0.47	0.5	-	-
3.30	3.36	3.33	limi argillosi e argille limose	7.0	0.8-1.1	0.47	0.4	-	-
3.36	3.54	3.45	argille	5.9	0.4-0.8	0.49	0.4	-	-
3.54	3.58	3.56	limi argillosi e argille limose	6.9	0.8-1.1	0.49	0.4	-	-
3.58	4.00	3.79	argille	5.5	0.4-0.8	0.54	0.3	-	-
4.00	4.08	4.04	limi argillosi e argille limose	3.7	0.8-1.1	0.53	0.2	-	-
4.08	4.12	4.10	limi e limi sabbiosi	5.9	0.8-1.1	0.53	0.3	<32	19
4.12	4.20	4.16	limi argillosi e argille limose	4.7	0.8-1.1	0.54	0.3	-	-
4.20	4.24	4.22	limi e limi sabbiosi	7.6	0.8-1.1	0.55	0.5	<32	20
4.24	4.26	4.25	sabbie limose	13.5	0.8-1.1	0.55	-	<32	24
4.26	4.32	4.29	limi e limi sabbiosi	8.0	0.8-1.1	0.56	0.5	<32	21
4.32	4.36	4.34	limi argillosi e argille limose	5.9	0.8-1.1	0.56	0.3	-	-
4.36	4.42	4.39	limi e limi sabbiosi	8.6	0.8-1.1	0.57	0.5	<32	21
4.42	4.50	4.46	limi argillosi e argille limose	5.2	0.8-1.1	0.58	0.3	-	-
4.50	4.56	4.53	limi e limi sabbiosi	6.6	0.8-1.1	0.58	0.4	<32	19
4.56	4.58	4.57	limi argillosi e argille limose	4.5	0.8-1.1	0.58	0.2	-	-
4.58	4.68	4.63	argille	3.9	0.4-0.8	0.60	0.2	-	-
4.68	4.76	4.72	limi argillosi e argille limose	3.8	0.8-1.1	0.60	0.2	-	-
4.76	4.78	4.77	limi e limi sabbiosi	3.9	0.8-1.1	0.60	0.2	<32	16
4.78	4.80	4.79	limi argillosi e argille limose	3.8	0.8-1.1	0.61	0.2	-	-
4.80	4.82	4.81	limi e limi sabbiosi	4.2	0.8-1.1	0.61	0.2	<32	16
4.82	4.98	4.90	limi argillosi e argille limose	4.2	0.8-1.1	0.63	0.2	-	-
4.98	5.00	4.99	limi e limi sabbiosi	6.3	0.8-1.1	0.63	0.4	<32	18
5.00	5.02	5.01	sabbie limose	21.7	0.8-1.1	0.63	-	<32	25
5.02	5.18	5.10	sabbie	54.8	0.8-1.1	0.66	-	34	30
5.18	5.30	5.24	sabbie limose	40.1	0.8-1.1	0.67	-	32	28
5.30	5.76	5.53	sabbie	56.5	0.8-1.1	0.74	-	33	30
5.76	5.78	5.77	sabbie limose	74.6	0.8-1.1	0.72	-	35	31
5.78	5.84	5.81	sabbie	121.3	0.8-1.1	0.72	-	37	34
5.84	5.98	5.91	sabbie limose	65.4	0.8-1.1	0.74	-	34	30
5.98	7.62	6.80	sabbie	95.6	0.8-1.1	1.00	-	34	32
7.62	7.72	7.67	sabbie limose	48.6	0.8-1.1	0.94	-	<32	27
7.72	7.82	7.77	limi e limi sabbiosi	24.1	0.8-1.1	0.95	1.5	<32	23
7.82	7.84	7.83	sabbie limose	27.5	0.8-1.1	0.95	-	<32	24
7.84	7.92	7.88	limi e limi sabbiosi	17.3	0.8-1.1	0.96	1.1	<32	21
7.92	7.96	7.94	limi argillosi e argille limose	10.1	0.8-1.1	0.96	0.6	-	-
7.96	8.06	8.01	argille	6.7	0.4-0.8	0.97	0.3	-	-
8.06	8.14	8.10	limi argillosi e argille limose	8.9	0.8-1.1	0.98	0.5	-	-
8.14	8.20	8.17	argille	7.7	0.4-0.8	0.98	0.4	-	-
8.20	8.30	8.25	limi e limi sabbiosi	16.0	0.8-1.1	1.00	1.0	<32	21
8.30	8.32	8.31	limi argillosi e argille limose	9.5	0.8-1.1	1.00	0.5	-	-
8.32	8.36	8.34	limi e limi sabbiosi	12.1	0.8-1.1	1.00	0.7	<32	19

S110092_SCPTU 01.xls - Interpretazioni - pag 1 di 3



elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P IVA e Codice Fiscale n. 00174600387

Laboratorio aut. del Ministero Infrastrutture e Trasporti P.C.S. U.P.P. S.T.C. in base al D.P.R. n. 380/01 art. 59 con n. 349/99 con n. 53/02 del 06/05/2002

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001



elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P IVA e Codice Fiscale n. 00174600387

Laboratorio aut. del Ministero Infrastrutture e Trasporti P.C.S. U.P.P. S.T.C. in base al D.P.R. n. 380/01 art. 59 con n. 349/99 con n. 53/02 del 06/05/2002

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2000
UNI EN ISO 14001

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi
CANTIERE Polisportivo Darsena - via Marani, Ravenna

CPT N° SCPTU 01 PROF. FALDA (m da p.c.) 2.30 TIPO PUNTA piezocono G1 - CPL2IN
DATA 30/06/11 PREFORO (m da p.c.) 0.90 Lat. 44.415157°
COMMESSA 9405/11 Long. 12.211598°

Prof. (m) da	Prof. media a	Pot. strato (m)	Litologia	q _c media (kg/cm ²)	γ' (t/m ³)	σ' _{vo} (kg/cm ²)	C _u media (kg/cm ²)	Φ' (1) (gradi)	Φ (2) (gradi)
8.36	8.44	8.40	0.08	limi argillosi e argille limose	9.9	0.8-1.1	1.01	0.6	-
8.44	8.50	8.47	0.06	limi e limi sabbiosi	12.3	0.8-1.1	1.02	0.7	<32
8.50	8.52	8.51	0.02	limi argillosi e argille limose	7.4	0.8-1.1	1.02	0.4	-
8.52	8.54	8.53	0.02	torbe	4.8	0.4-0.8	1.02	0.2	-
8.54	8.56	8.55	0.02	argille	4.8	0.4-0.8	1.02	0.2	-
8.56	8.60	8.58	0.04	limi argillosi e argille limose	7.1	0.8-1.1	1.03	0.4	-
8.60	8.70	8.65	0.10	limi e limi sabbiosi	11.6	0.8-1.1	1.04	0.7	<32
8.70	8.72	8.71	0.02	limi argillosi e argille limose	7.2	0.8-1.1	1.04	0.4	-
8.72	8.74	8.73	0.02	limi e limi sabbiosi	10.5	0.8-1.1	1.04	0.6	<32
8.74	8.76	8.75	0.02	sabbie limose	30.6	0.8-1.1	1.04	-	<32
8.76	9.24	9.00	0.48	sabbie	69.5	0.8-1.1	1.12	-	<32
9.24	9.52	9.38	0.28	sabbie limose	43.7	0.8-1.1	1.14	-	<32
9.52	9.56	9.54	0.04	limi e limi sabbiosi	19.7	0.8-1.1	1.13	1.2	<32
9.56	9.60	9.58	0.04	sabbie limose	31.9	0.8-1.1	1.14	-	<32
9.60	9.68	9.64	0.08	limi e limi sabbiosi	29.8	0.8-1.1	1.15	1.9	<32
9.68	9.74	9.71	0.06	sabbie limose	53.0	0.8-1.1	1.16	-	<32
9.74	10.96	10.35	1.22	sabbie	63.6	0.8-1.1	1.35	-	<32
10.96	11.16	11.06	0.20	sabbie limose	39.7	0.8-1.1	1.32	-	<32
11.16	11.98	11.57	0.82	sabbie	75.9	0.8-1.1	1.44	-	<32
11.98	12.02	12.00	0.04	sabbie limose	74.3	0.8-1.1	1.41	-	<32
12.02	12.58	12.30	0.56	sabbie	72.7	0.8-1.1	1.50	-	<32
12.58	12.66	12.62	0.08	sabbie limose	59.4	0.8-1.1	1.48	-	<32
12.66	13.86	13.26	1.20	sabbie	62.3	0.8-1.1	1.67	-	<32
13.86	14.00	13.93	0.14	sabbie limose	54.2	0.8-1.1	1.64	-	<32
14.00	14.40	14.20	0.40	sabbie	61.6	0.8-1.1	1.69	-	<32
14.40	14.52	14.46	0.12	sabbie limose	42.0	0.8-1.1	1.69	-	<32
14.52	14.54	14.53	0.02	limi e limi sabbiosi	27.6	0.8-1.1	1.69	1.6	<32
14.54	14.58	14.56	0.04	limi argillosi e argille limose	17.4	0.8-1.1	1.70	1.0	-
14.58	14.60	14.59	0.02	limi e limi sabbiosi	25.5	0.8-1.1	1.70	1.5	<32
14.60	19.04	16.82	4.44	sabbie	91.1	0.8-1.1	2.41	-	<32
19.04	19.08	19.06	0.04	sabbie limose	52.1	0.8-1.1	2.20	-	<32
19.08	19.10	19.09	0.02	limi argillosi e argille limose	21.0	0.8-1.1	2.20	1.1	-
19.10	19.12	19.11	0.02	limi e limi sabbiosi	26.0	0.8-1.1	2.20	1.5	<32
19.12	19.14	19.13	0.02	limi argillosi e argille limose	22.8	0.8-1.1	2.21	1.3	-
19.14	19.16	19.15	0.02	argille	20.1	0.4-0.8	2.21	1.1	-
19.16	19.20	19.18	0.04	torbe	17.7	0.4-0.8	2.21	0.9	-
19.20	19.22	19.21	0.02	argille	21.2	0.4-0.8	2.21	1.2	-
19.22	19.28	19.25	0.06	limi argillosi e argille limose	19.7	0.8-1.1	2.22	1.1	-
19.28	19.36	19.32	0.08	limi e limi sabbiosi	20.3	0.8-1.1	2.23	1.1	<32
19.36	19.40	19.38	0.04	limi argillosi e argille limose	14.7	0.8-1.1	2.23	0.7	-
19.40	19.48	19.44	0.08	limi e limi sabbiosi	17.0	0.8-1.1	2.24	0.9	<32
19.48	19.50	19.49	0.02	limi argillosi e argille limose	14.3	0.8-1.1	2.24	0.7	-
19.50	19.52	19.51	0.02	limi e limi sabbiosi	23.7	0.8-1.1	2.25	1.3	<32
19.52	19.56	19.54	0.04	sabbie limose	42.4	0.8-1.1	2.25	-	<32
19.56	23.08	21.32	3.52	sabbie	128.1	0.8-1.1	2.82	-	<32
23.08	23.18	23.13	0.10	sabbie limose	68.6	0.8-1.1	2.66	-	<32
23.18	23.22	23.20	0.04	limi e limi sabbiosi	45.3	0.8-1.1	2.66	2.7	<32
23.22	23.24	23.23	0.02	argille	27.7	0.4-0.8	2.66	1.5	-
23.24	23.32	23.28	0.08	torbe	18.1	0.4-0.8	2.67	0.9	-
23.32	23.34	23.33	0.02	limi e limi sabbiosi	38.4	0.8-1.1	2.67	2.2	<32
23.34	23.36	23.35	0.02	sabbie limose	64.6	0.8-1.1	2.67	-	<32
23.36	23.50	23.43	0.14	sabbie	78.0	0.8-1.1	2.69	-	<32
23.50	23.54	23.52	0.04	sabbie limose	43.9	0.8-1.1	2.69	-	<32
23.54	23.56	23.55	0.02	limi e limi sabbiosi	28.1	0.8-1.1	2.70	1.6	<32
23.56	23.58	23.57	0.02	limi argillosi e argille limose	22.3	0.8-1.1	2.70	1.2	-

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi
CANTIERE Polisportivo Darsena - via Marani, Ravenna

CPT N° SCPTU 01 PROF. FALDA (m da p.c.) 2.30 TIPO PUNTA piezocono G1 - CPL2IN
DATA 30/06/11 PREFORO (m da p.c.) 0.90 Lat. 44.415157°
COMMESSA 9405/11 Long. 12.211598°

Prof. (m) da	Prof. media a	Pot. strato (m)	Litologia	q _c media (kg/cm ²)	γ' (t/m ³)	σ' _{vo} (kg/cm ²)	C _u media (kg/cm ²)	Φ' (1) (gradi)	Φ (2) (gradi)
23.58	23.64	23.61	0.06	torbe	15.9	0.4-0.8	2.70	0.7	-
23.64	23.66	23.65	0.02	argille	16.7	0.4-0.8	2.70	0.8	-
23.66	23.68	23.67	0.02	limi argillosi e argille limose	20.3	0.8-1.1	2.71	1.0	-
23.68	23.72	23.70	0.04	limi e limi sabbiosi	24.2	0.8-1.1	2.71	1.3	<32
23.72	23.82	23.77	0.10	sabbie limose	34.7	0.8-1.1	2.73	-	<32
23.82	23.84	23.83	0.02	limi e limi sabbiosi	18.3	0.8-1.1	2.72	0.9	<32
23.84	23.88	23.86	0.04	sabbie limose	34.8	0.8-1.1	2.73	-	<32
23.88	23.94	23.91	0.06	sabbie	61.4	0.8-1.1	2.74	-	<32
23.94	24.02	23.98	0.08	sabbie limose	49.9	0.8-1.1	2.75	-	<32
24.02	24.10	24.06	0.08	sabbie	81.7	0.8-1.1	2.76	-	<32
24.10	24.16	24.13	0.06	sabbie limose	52.0	0.8-1.1	2.76	-	<32
24.16	24.38	24.27	0.22	sabbie	129.5	0.8-1.1	2.79	-	<32
24.38	24.40	24.39	0.02	sabbie limose	48.8	0.8-1.1	2.79	-	<32
24.40	24.44	24.42	0.04	limi e limi sabbiosi	30.0	0.8-1.1	2.79	1.7	<32
24.44	24.46	24.45	0.02	argille	19.6	0.4-0.8	2.79	1.0	-
24.46	24.48	24.47	0.02	torbe	15.6	0.4-0.8	2.79	0.7	-
24.48	24.50	24.49	0.02	argille	23.6	0.4-0.8	2.80	1.2	-
24.50	24.62	24.56	0.12	sabbie limose	51.0	0.8-1.1	2.81	-	<32
24.62	24.66	24.64	0.04	limi e limi sabbiosi	25.1	0.8-1.1	2.82	1.3	<32
24.66	24.70	24.68	0.04	limi argillosi e argille limose	19.3	0.8-1.1	2.82	1.0	-
24.70	24.72	24.71	0.02	limi e limi sabbiosi	28.0	0.8-1.1	2.82	1.5	<32
24.72	24.76	24.74	0.04	limi argillosi e argille limose	22.9	0.8-1.1	2.83	1.2	-
24.76	24.78	24.77	0.02	argille	15.2	0.4-0.8	2.83	0.7	-
24.78	24.82	24.80	0.04	torbe	12.3	0.4-0.8	2.83	0.5	-
24.82	24.86	24.84	0.04	argille	12.2	0.4-0.8	2.83	0.5	-
24.86	24.90	24.88	0.04	limi argillosi e argille limose	12.5	0.8-1.1	2.84	0.5	-
24.90	25.70	25.30	0.80	limi e limi sabbiosi	12.3	0.8-1.1	2.97	0.5	<32
25.70	25.80	25.75	0.10	sabbie limose	20.8	0.8-1.1	2.94	-	<32
25.80	25.84	25.82	0.04	limi e limi sabbiosi	25.6	0.8-1.1	2.94	1.4	<32
25.84	25.90	25.87	0.06	limi argillosi e argille limose	21.8	0.8-1.1	2.95	1.1	-
25.90	26.00	25.95	0.10	argille	17.5	0.4-0.8	2.96	0.8	-
26.00	26.32	26.16	0.32	limi argillosi e argille limose	14.7	0.8-1.1	3.01	0.6	-
26.32	26.44	26.38	0.12	limi e limi sabbiosi	12.4	0.8-1.1	3.01	0.5	<32
26.44	26.60	26.52	0.16	sabbie limose	16.6	0.8-1.1	3.03	-	<32
26.60	26.74	26.67	0.14	limi e limi sabbiosi	17.8	0.8-1.1	3.05	0.8	<32
26.74	26.76	26.75	0.02	limi argillosi e argille limose	15.5	0.8-1.1	3.04	0.7	-
26.76	26.98	26.87	0.22	limi e limi sabbiosi	20.7	0.8-1.1	3.08	1.0	<32
26.98	27.30	27.14	0.32	limi argillosi e argille limose	18.5	0.8-1.1	3.12	0.9	-
27.30	27.44	27.37	0.14	limi e limi sabbiosi	17.6	0.8-1.1	3.13	0.8	<32
27.44	27.66	27.55	0.22	limi argillosi e argille limose	17.0	0.8-1.1	3.15	0.8	-
27.66	27.74	27.70	0.08	limi e limi sabbiosi	17.8	0.8-1.1	3.16	0.8	<32
27.74	27.92	27.83	0.18	limi argillosi e argille limose	14.9	0.8-1.1	3.18	0.6	-
27.92	28.58	28.25	0.66	limi e limi sabbiosi	15.4	0.8-1.1	3.28	0.6	<32
28.58	28.76	28.67	0.18	sabbie limose	19.3	0.8-1.1	3.27	-	<32
28.76	28.88	28.82	0.12	limi e limi sabbiosi	23.8	0.8-1.1	3.29	1.2	<32
28.88	29.02	28.95	0.14	limi argillosi e argille limose	19.9	0.8-1.1	3.30	0.9	-
29.02	29.08	29.05	0.06	limi e limi sabbiosi	22.3	0.8-1.1	3.30	1.1	<32
29.08	29.14	29.11	0.06	sabbie limose	31.4	0.8-1.1	3.31	-	<32
29.14	29.20	29.17	0.06	limi e limi sabbiosi	32.6	0.8-1.1	3.32	1.8	<32
29.20	29.40	29.30	0.20	sabbie limose	50.8	0.8-1.1	3.35	-	<32
29.40	29.70	29.55	0.30	limi e limi sabbiosi	34.3	0.8-1.1	3.39	1.9	<32
29.70	29.80	29.75	0.10	sabbie limose	68.1	0.8-1.1	3.39	-	<32
29.80	30.00	29.90	0.20	sabbie	75.1	0.8-1.1	3.41	-	<32

Il Direttore Settore Prove in Sito:
dott. geol. Gianluca Ferioli

MITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi


TIERE Polisportivo Ponte Nuovo - Ravenna

N° SCPTU 01 PROF. FALDA (m da p.c.) 1.20

TA 08/04/10 PREFORO (m da p.c.)

TIPO PUNTA piezocono G1 - CPL2IN

MESSA 8042/10 C. SITO N°: 572/10 del 28/04/10

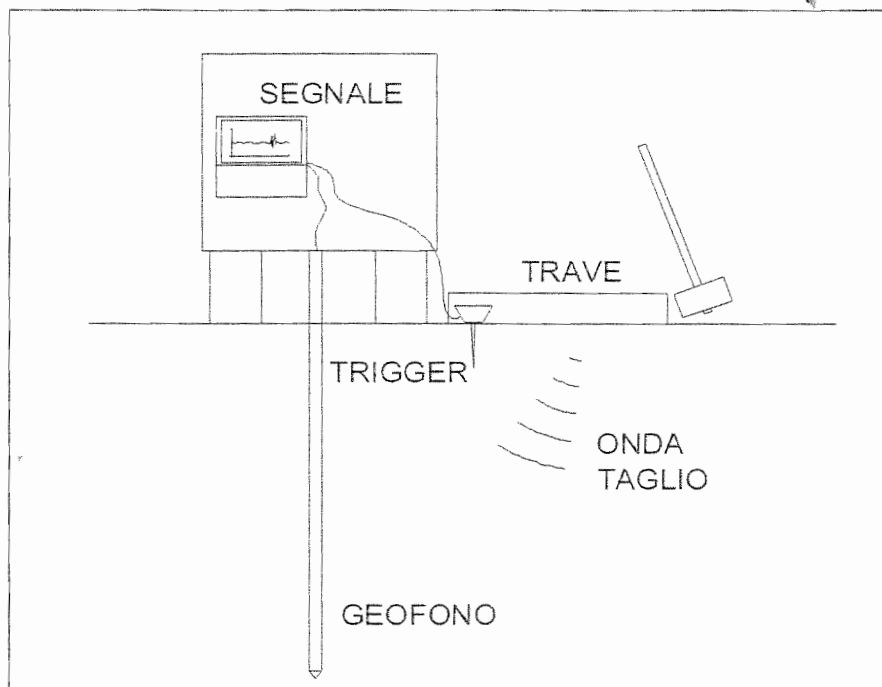

Profondità (m)	Ts (s) T0	L (m)	Vs (m/s)	Vis (m/s)
0.3		1.19		
2	0.0071	2.31	158	158
4	0.0222	4.16	134	123
5	0.0306	5.13	129	115
7	0.0435	7.09	136	153
9	0.0555	9.07	142	164
11	0.0648	11.06	152	213
13	0.0741	13.05	160	213
15	0.0821	15.04	169	249
16	0.0860	16.04	173	256
18	0.0959	18.04	176	202
20	0.1021	20.03	185	321
22	0.1094	22.03	190	273
24	0.1181	24.03	193	231
26	0.1256	26.03	198	265
28	0.1341	28.02	200	237
30	0.1425	30.02	202	237

$V_{s,30} = 202 \text{ m/s}$

- D = Distanza centro trave generatrice onde di taglio - verticale di prova = 1.15 m
Profondità = Profondità punta da piano campagna
Ts = Tempo percorrenza onda di taglio
L = Lunghezza percorso onda di taglio
Vs = Velocità onde di taglio da piano campagna alla profondità indicata
Vis = Velocità onde di taglio nello strato di terreno compreso fra le due profondità indicate

elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P.IVA e Codice Fiscale n. 00174600367


Laboratorio coll. dal Ministero dell'Agricoltura e delle Foreste P.C.S. s.r.l. P.F. S.T.C. in base al D.P.R. n. 2800/98 art. 45 c.1, l. 345/04, Doc. n° 53362 del 06/05/2004

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001:2000
UNI EN ISO 14001

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi

LAVORO ANTIERE Polisportivo Ponte Nuovo - Ravenna

PT N°	SCPTU 01	PROF. FALDA (m da p.c.)	1.20		
DATA	08/04/10	PREFORO (m da p.c.)		TIPO PUNTA	piezocono G1 - CPL2IN
COMMESSA	8042/10	C. SITO N°:	572/10 del 28/04/10		

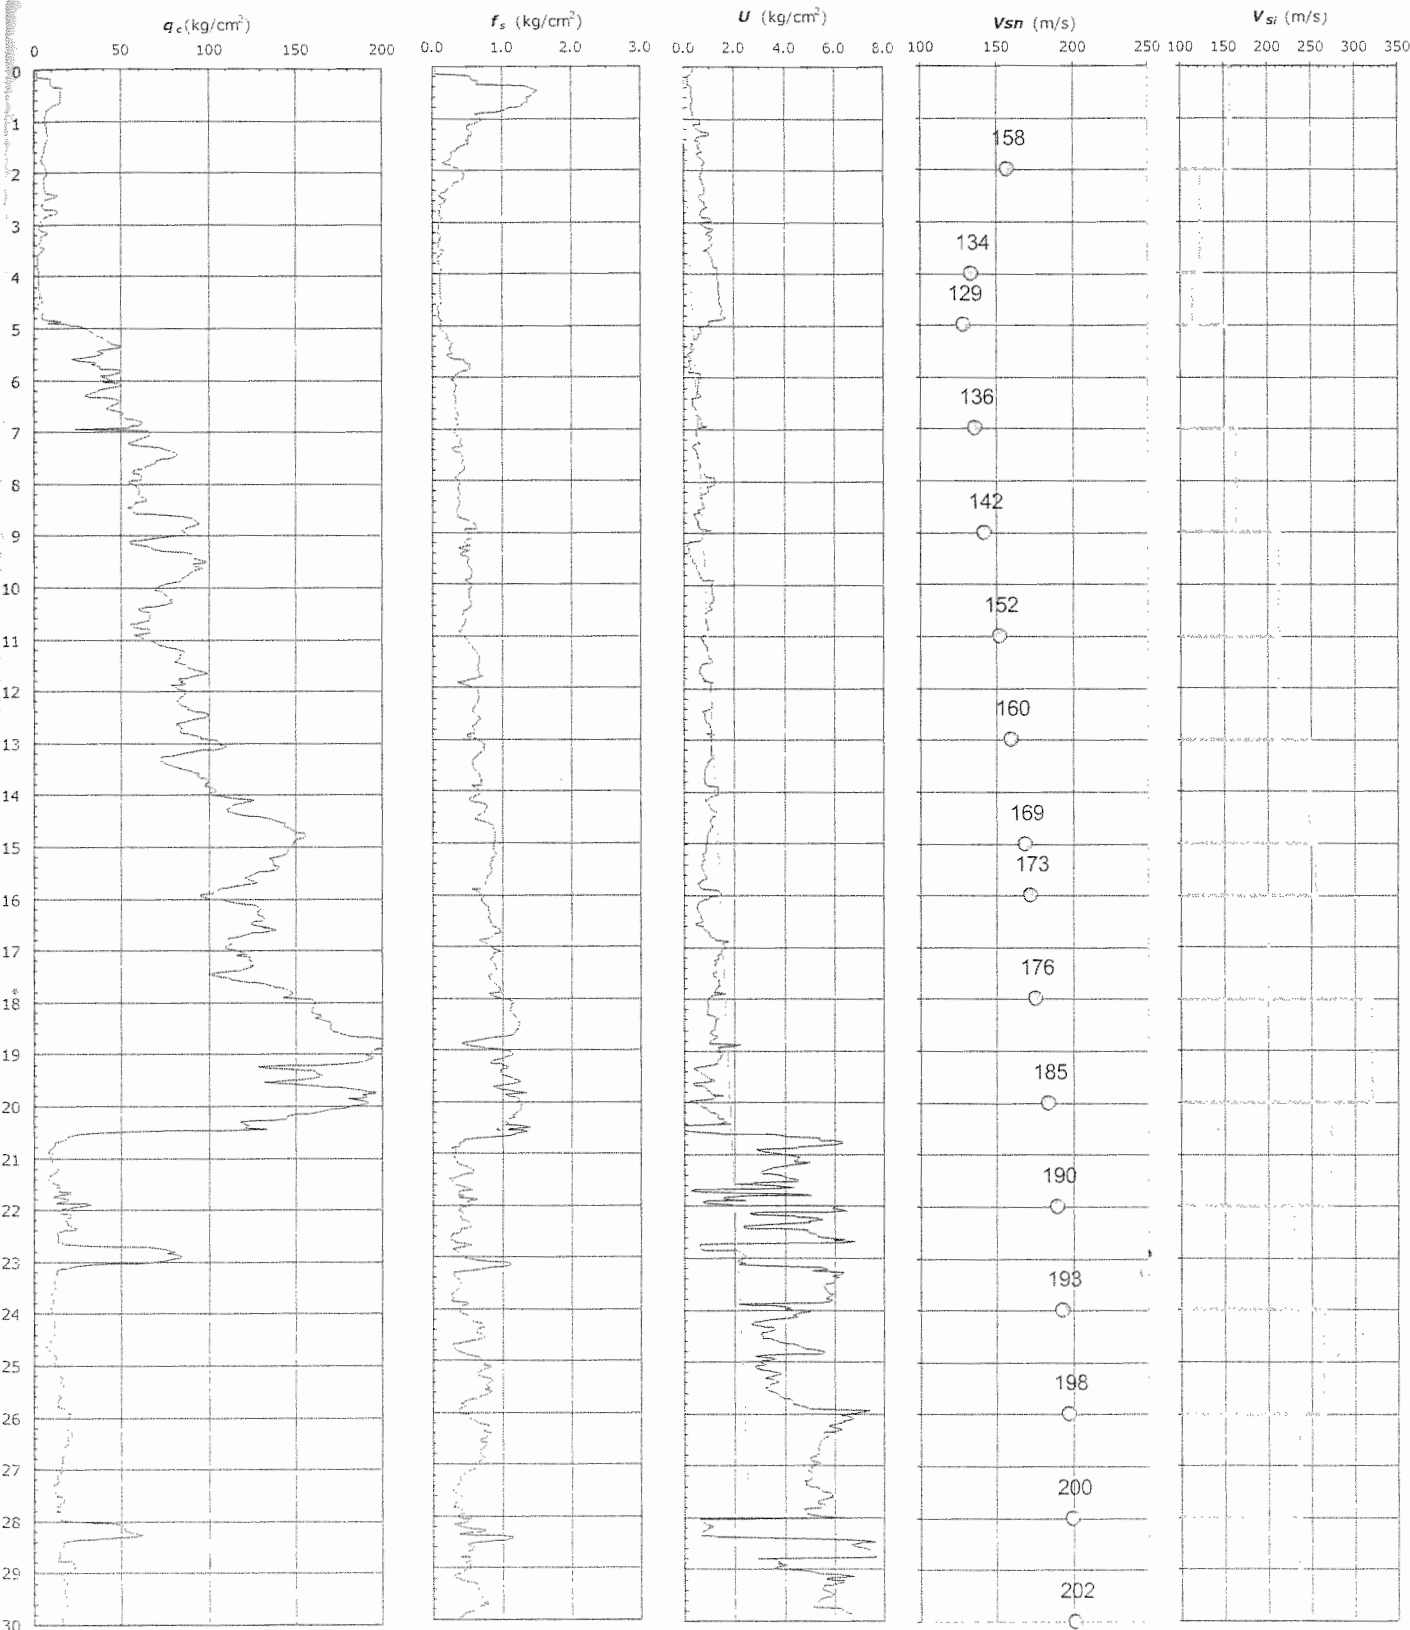

Lo Sperimentatore:
dott. Massimo Romagnoli

572-10_SCPTU 01 - pag 2 di 4

Il Direttore Settore Prove in Sito:
dott. geol. Gianluca Ferioli

elletipi s.r.l.


Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P.IVA e Codice Fiscale n. 00174600387

Attestato del Ministero delle Infrastrutture e dei Trasporti P.C.S. al PE S.T.C. in base al D.S.P. n. 58091 del 31/01/09 Del. n. 53552 del 09/05/2009

MITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi
NTIERE Polisportivo Ponte Nuovo - Ravenna
T N° SCPTU 01 PROF. FALDA (m da p.c.) 1.20 TIPO PUNTA piezocono G1 - CPL2IN
TA 08/04/10 PREFORO (m da p.c.)
MMESSA 8042/10 C. SITO N°: 572/10 del 28/04/10

PLANIMETRIA

Località: Polisportivo Ponte Nuovo - Ravenna

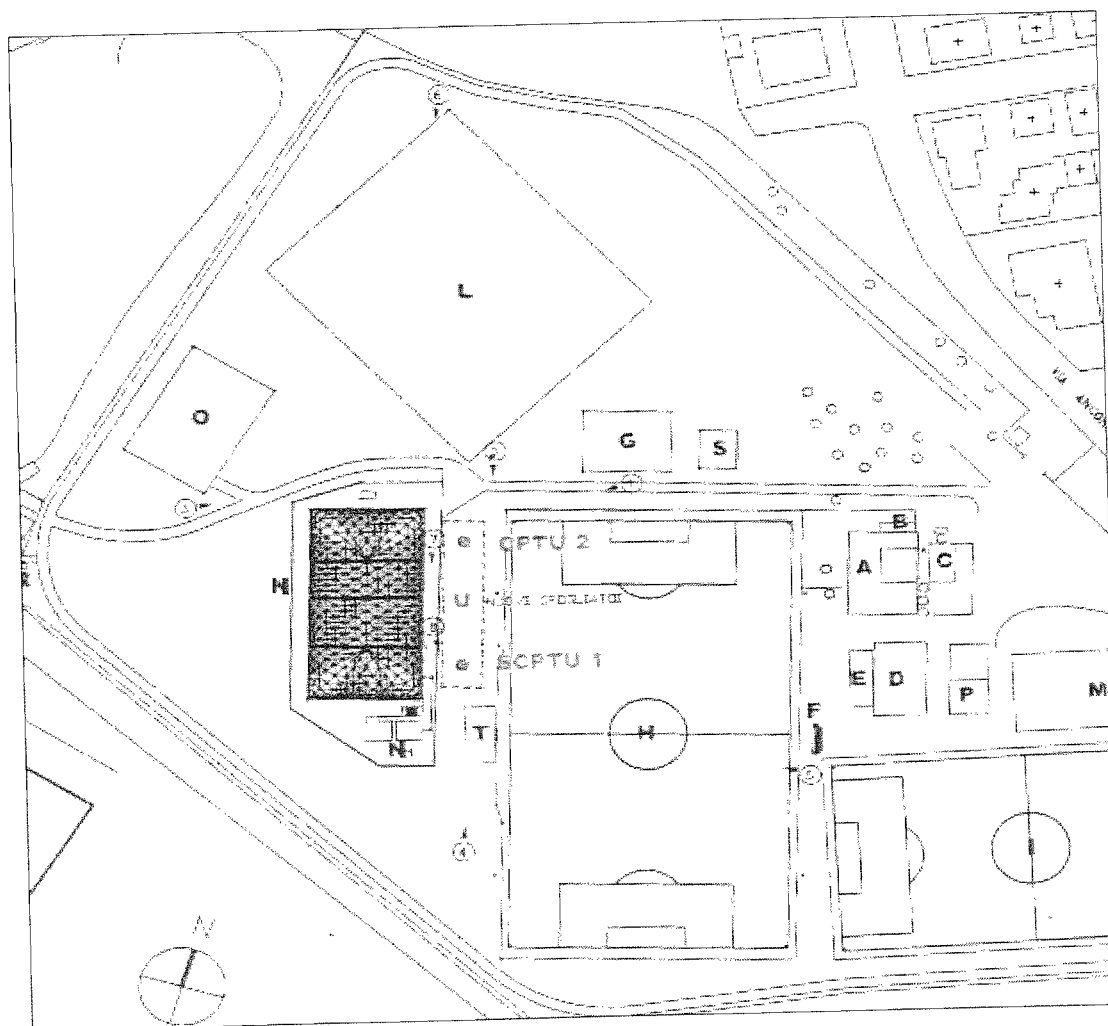

MITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi
NTIERE Polisportivo Ponte Nuovo - Ravenna

r n° SCPTU 01 **PROF. FALDA (m da p.c.)** 1.20
TA 08/04/10 **PREFORO (m da p.c.)** 0.00 **TIPO PUNTA** piezocono G1 - CPL2IN
MESSA 8042/10

Prof. (m)	Prof. media	Pot. strato	Litologia	q _c media	γ'	σ' _{vo}	C _u media	Φ' (1)	Φ (2)
a	(m)	(m)		(kg/cm ²)	(t/m ³)	(kg/cm ²)	(kg/cm ²)	(gradi)	(gradi)
10	0.16	0.08	argille	1.2	0.7-1.3	0.02	0.1	-	-
16	0.18	0.17	torbe	8.3	0.7-1.3	0.02	0.5	-	-
18	0.24	0.21	argille	10.0	0.7-1.3	0.03	0.7	-	-
24	0.32	0.28	torbe	9.5	0.7-1.3	0.04	0.6	-	-
32	0.34	0.33	argille	10.7	0.7-1.3	0.04	0.7	-	-
34	1.56	0.95	torbe	9.5	0.4-0.8	0.26	0.6	-	-
56	1.60	1.58	argille	5.8	0.4-0.8	0.23	0.4	-	-
60	1.62	1.61	torbe	5.4	0.4-0.8	0.23	0.3	-	-
62	1.68	1.65	argille	5.2	0.4-0.8	0.24	0.3	-	-
68	1.78	1.73	torbe	4.2	0.4-0.8	0.25	0.3	-	-
78	1.82	1.80	argille	4.9	0.4-0.8	0.25	0.3	-	-
82	1.88	1.85	limi argillosi e argille limose	6.1	0.8-1.1	0.26	0.4	-	-
88	2.02	1.95	argille	7.1	0.4-0.8	0.27	0.5	-	-
102	2.22	2.12	torbe	5.9	0.4-0.8	0.29	0.4	-	-
122	2.36	2.29	argille	5.8	0.4-0.8	0.30	0.4	-	-
136	2.40	2.38	limi argillosi e argille limose	6.7	0.8-1.1	0.30	0.4	-	-
140	2.52	2.46	limi e limi sabbiosi	10.4	0.8-1.1	0.32	0.7	<32	25
152	2.54	2.53	limi argillosi e argille limose	6.4	0.8-1.1	0.32	0.4	-	-
154	2.58	2.56	argille	5.6	0.4-0.8	0.32	0.3	-	-
158	2.60	2.59	limi argillosi e argille limose	4.9	0.8-1.1	0.32	0.3	-	-
160	2.62	2.61	argille	4.3	0.4-0.8	0.32	0.3	-	-
162	2.68	2.65	limi argillosi e argille limose	5.0	0.8-1.1	0.33	0.3	-	-
168	2.72	2.70	limi e limi sabbiosi	8.8	0.8-1.1	0.34	0.6	<32	24
172	2.78	2.75	sabbie limose	13.4	0.8-1.1	0.34	-	<32	26
178	2.86	2.82	limi e limi sabbiosi	9.0	0.8-1.1	0.35	0.6	<32	24
186	2.90	2.88	limi argillosi e argille limose	5.0	0.8-1.1	0.36	0.3	-	-
190	2.94	2.92	argille	3.8	0.4-0.8	0.36	0.2	-	-
194	3.04	2.99	limi argillosi e argille limose	4.5	0.8-1.1	0.37	0.3	-	-
204	3.06	3.05	argille	2.9	0.4-0.8	0.37	0.2	-	-
206	3.12	3.09	limi argillosi e argille limose	3.5	0.8-1.1	0.38	0.2	-	-
212	3.20	3.16	limi e limi sabbiosi	6.8	0.8-1.1	0.39	0.4	<32	21
220	3.24	3.22	limi argillosi e argille limose	4.0	0.8-1.1	0.39	0.2	-	-
224	3.28	3.26	argille	3.5	0.4-0.8	0.40	0.2	-	-
228	3.32	3.30	limi argillosi e argille limose	4.0	0.8-1.1	0.40	0.2	-	-
232	3.38	3.35	argille	3.1	0.4-0.8	0.41	0.2	-	-
238	3.44	3.41	limi argillosi e argille limose	3.9	0.8-1.1	0.41	0.2	-	-
244	3.48	3.46	limi e limi sabbiosi	5.9	0.8-1.1	0.42	0.3	<32	20
248	3.52	3.50	limi argillosi e argille limose	4.9	0.8-1.1	0.42	0.3	-	-
252	4.30	3.91	argille	2.8	0.4-0.8	0.52	0.1	-	-
260	4.32	4.31	limi argillosi e argille limose	3.7	0.8-1.1	0.49	0.2	-	-
262	4.40	4.36	argille	3.4	0.4-0.8	0.50	0.2	-	-
264	4.44	4.42	limi argillosi e argille limose	5.3	0.8-1.1	0.50	0.3	-	-
266	4.46	4.45	limi e limi sabbiosi	6.6	0.8-1.1	0.50	0.4	<32	19
268	4.48	4.47	limi argillosi e argille limose	5.3	0.8-1.1	0.50	0.3	-	-
270	4.52	4.50	argille	3.1	0.4-0.8	0.51	0.2	-	-
272	4.54	4.53	torbe	2.2	0.4-0.8	0.51	0.1	-	-
274	4.64	4.59	argille	2.4	0.4-0.8	0.52	0.1	-	-
276	4.66	4.65	limi argillosi e argille limose	3.6	0.8-1.1	0.52	0.2	-	-
278	4.72	4.69	limi e limi sabbiosi	5.1	0.8-1.1	0.53	0.3	<32	18
280	4.80	4.76	limi argillosi e argille limose	4.8	0.8-1.1	0.54	0.3	-	-
282	4.86	4.83	limi e limi sabbiosi	9.2	0.8-1.1	0.54	0.6	<32	21
284	4.88	4.87	sabbie limose	16.5	0.8-1.1	0.54	-	<32	24
286	4.90	4.89	limi e limi sabbiosi	8.3	0.8-1.1	0.54	0.5	<32	20
290	5.06	4.98	sabbie limose	27.1	0.8-1.1	0.57	-	<32	27

elietipi s.r.l.

Sede operativa ed amm.va. Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elietipi.it sito: www.elietipi.it
P.IVA e Codice Fiscale n. 00174600387

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2008
UNI EN ISO 14001

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi
ANTIERE Polisportivo Ponte Nuovo - Ravenna

PT N° SCPTU 01 **PROF. FALDA (m da p.c.)** 1.20
ATA 08/04/10 **PREFORO (m da p.c.)** 0.00 **TIPO PUNTA** piezocono G1 - CPL2IN
OMMESSA 8042/10

	Prof. (m)	Prof. media	Pot. strato	Litologia	q _c media	γ'	σ' _{ve}	C _u media	Φ' (1)	Φ (2)
da	a	(m)	(m)		(kg/cm ²)	(t/m ³)	(kg/cm ²)	(kg/cm ²)	(gradi)	(gradi)
5.06	- 5.10	5.08	0.04	sabbie	33.7	0.8-1.1	0.57	-	<32	28
5.10	- 5.12	5.11	0.02	sabbie limose	35.4	0.8-1.1	0.57	-	<32	26
5.12	- 5.14	5.13	0.02	sabbie	36.9	0.8-1.1	0.57	-	<32	28
5.14	- 5.16	5.15	0.02	sabbie limose	37.5	0.8-1.1	0.57	-	<32	28
5.16	- 5.40	5.28	0.24	sabbie	44.5	0.8-1.1	0.61	-	32	29
5.40	- 5.98	5.69	0.58	sabbie limose	37.7	0.8-1.1	0.69	-	<32	28
5.98	- 6.02	6.00	0.04	sabbie	46.6	0.8-1.1	0.67	-	32	29
6.02	- 6.04	6.03	0.02	sabbie limose	39.4	0.8-1.1	0.67	-	<32	28
6.04	- 6.12	6.08	0.08	sabbie	49.7	0.8-1.1	0.68	-	32	29
6.12	- 6.36	6.24	0.24	sabbie limose	36.9	0.8-1.1	0.72	-	<32	27
6.36	- 6.46	6.41	0.10	sabbie	46.7	0.8-1.1	0.72	-	<32	28
6.46	- 6.58	6.52	0.12	sabbie limose	43.4	0.8-1.1	0.74	-	<32	26
6.58	- 6.92	6.75	0.34	sabbie	55.0	0.8-1.1	0.79	-	32	29
6.92	- 6.94	6.93	0.02	sabbie limose	23.5	0.8-1.1	0.77	-	<32	24
6.94	- 9.08	8.01	2.14	sabbie	68.6	0.8-1.1	1.12	-	<32	29
9.08	- 9.14	9.11	0.06	sabbie limose	55.5	0.8-1.1	1.02	-	<32	27
9.14	- 20.46	14.80	11.32	sabbie	118.1	0.8-1.1	2.84	-	<32	29
20.46	- 20.48	20.47	0.02	sabbie limose	75.9	0.8-1.1	2.29	-	<32	24
20.48	- 20.52	20.50	0.04	limi e limi sabbiosi	43.7	0.8-1.1	2.29	2.6	<32	21
20.52	- 20.54	20.53	0.02	limi argillosi e argille limose	25.4	0.8-1.1	2.30	1.4	-	-
20.54	- 20.56	20.55	0.02	argille	21.7	0.4-0.8	2.30	1.2	-	-
20.56	- 20.60	20.58	0.04	torbe	19.0	0.4-0.8	2.30	1.0	-	-
20.60	- 20.62	20.61	0.02	argille	19.7	0.4-0.8	2.30	1.0	-	-
20.62	- 20.68	20.65	0.06	torbe	16.1	0.4-0.8	2.31	0.8	-	-
20.68	- 20.72	20.70	0.04	argille	12.2	0.4-0.8	2.31	0.5	-	-
20.72	- 20.82	20.77	0.10	limi argillosi e argille limose	11.3	0.8-1.1	2.32	0.5	-	-
20.82	- 20.88	20.85	0.06	argille	8.5	0.4-0.8	2.33	0.3	-	-
20.88	- 20.90	20.89	0.02	limi e limi sabbiosi	10.5	0.8-1.1	2.33	0.4	<32	13
20.90	- 21.16	21.03	0.26	limi argillosi e argille limose	10.7	0.8-1.1	2.37	0.4	-	-
21.16	- 21.20	21.18	0.04	limi e limi sabbiosi	13.6	0.8-1.1	2.36	0.6	<32	15
21.20	- 21.26	21.23	0.06	limi argillosi e argille limose	13.5	0.8-1.1	2.37	0.6	-	-
21.26	- 21.32	21.29	0.06	argille	11.3	0.4-0.8	2.38	0.5	-	-
21.32	- 21.40	21.36	0.08	torbe	8.6	0.4-0.8	2.38	0.3	-	-
21.40	- 21.44	21.42	0.04	argille	9.1	0.4-0.8	2.38	0.3	-	-
21.44	- 21.46	21.45	0.02	limi argillosi e argille limose	9.6	0.8-1.1	2.39	0.3	-	-
21.46	- 21.58	21.52	0.12	limi e limi sabbiosi	13.6	0.8-1.1	2.40	0.6	<32	15
21.58	- 21.62	21.60	0.04	limi argillosi e argille limose	12.9	0.8-1.1	2.40	0.6	-	-
21.62	- 21.68	21.65	0.06	limi e limi sabbiosi	20.0	0.8-1.1	2.41	1.0	<32	17
21.68	- 21.76	21.72	0.08	limi argillosi e argille limose	13.7	0.8-1.1	2.42	0.6	-	-
21.76	- 21.82	21.79	0.06	limi e limi sabbiosi	16.3	0.8-1.1	2.43	0.9	<32	16
21.82	- 21.86	21.84	0.04	limi argillosi e argille limose	14.0	0.8-1.1	2.43	0.6	-	-
21.86	- 21.88	21.87	0.02	limi e limi sabbiosi	30.0	0.8-1.1	2.43	1.7	<32	19
21.88	- 21.90	21.89	0.02	sabbie limose	33.3	0.8-1.1	2.43	-	<32	19
21.90	- 21.96	21.93	0.06	limi e limi sabbiosi	23.8	0.8-1.1	2.44	1.3	<32	18
21.96	- 22.04	22.00	0.08	limi argillosi e argille limose	15.0	0.8-1.1	2.45	0.7	-	-
22.04	- 22.38	22.21	0.34	limi e limi sabbiosi	20.1	0.8-1.1	2.50	1.0	<32	17
22.38	- 22.52	22.45	0.14	limi argillosi e argille limose	14.5	0.8-1.1	2.51	0.7	-	-
22.52	- 22.66	22.59	0.14	limi e limi sabbiosi	14.7	0.8-1.1	2.53	0.7	<32	15
22.66	- 22.68	22.67	0.02	sabbie limose	25.0	0.8-1.1	2.52	-	<32	18
22.68	- 23.02	22.85	0.34	sabbie	74.8	0.8-1.1	2.56	-	<32	24
23.02	- 23.04	23.03	0.02	sabbie limose	44.2	0.8-1.1	2.56	-	<32	21
23.04	- 23.06	23.05	0.02	limi e limi sabbiosi	32.2	0.8-1.1	2.56	1.8	<32	19
23.06	- 23.08	23.07	0.02	limi argillosi e argille limose	25.0	0.8-1.1	2.57	1.4	-	-
23.08	- 23.12	23.10	0.04	argille	19.8	0.4-0.8	2.57	1.0	-	-

elletipi s.r.l.

Sede operativa ed amm.va: Via Annibale Zucchini, 69 - 44100 FERRARA
tel. 0532/56771; fax 0532/56119 e-mail: info@elletipi.it sito: www.elletipi.it
P.IVA e Codice Fiscale n. 00174600387

La presente aut. del Ministero Infrastrutture e Trasporti (L. 442/2017 art. 17 c. 1) è in vigore dal 1°/10/2017 al 31/12/2017.

AZIENDA CON SISTEMA DI GESTIONE
INTEGRATO CERTIFICATO DA DNV
UNI EN ISO 9001/2008
UNI EN ISO 14001

COMMITTENTE Comune di Ravenna - Area Infrastrutture Civili - Servizio Edilizia U. O. Impianti Sportivi
CANTIERE Polisportivo Ponte Nuovo - Ravenna

PT N° SCPTU 01 **PROF. FALDA (m da p.c.)** 1.20
DATA 08/04/10 **PREFORO (m da p.c.)** 0.00 **TIPO PUNTA** piezocono G1 - CPL2IN
COMMESSA 8042/10


Prof. (m)	Prof. media	Pot. strato	Litologia	q _c media	γ'	σ' _{ve}	C _u media	Φ' (1)	Φ (2)
da	a	(m)		(kg/cm ²)	(t/m ³)	(kg/cm ²)	(kg/cm ²)	(gradi)	(gradi)
23.12	- 23.20	23.16	0.08	torbe	13.9	0.4-0.8	2.58	0.6	-
23.20	- 23.26	23.23	0.06	argille	12.6	0.4-0.8	2.58	0.5	-
23.26	- 23.28	23.27	0.02	limi argillosi e argille limose	12.1	0.8-1.1	2.58	0.5	-
23.28	- 23.32	23.30	0.04	limi e limi sabbiosi	11.8	0.8-1.1	2.59	0.5	<32
23.32	- 23.70	23.51	0.38	limi argillosi e argille limose	11.3	0.8-1.1	2.65	0.4	-
23.70	- 23.76	23.73	0.06	limi e limi sabbiosi	11.0	0.8-1.1	2.64	0.4	<32
23.76	- 23.80	23.78	0.04	limi argillosi e argille limose	11.0	0.8-1.1	2.64	0.4	-
23.80	- 23.84	23.82	0.04	limi e limi sabbiosi	11.6	0.8-1.1	2.65	0.5	<32
23.84	- 23.86	23.85	0.02	limi argillosi e argille limose	10.7	0.8-1.1	2.65	0.4	-
23.86	- 23.96	23.91	0.10	argille	10.0	0.4-0.8	2.66	0.3	-
23.96	- 24.10	24.03	0.14	limi argillosi e argille limose	11.4	0.8-1.1	2.68	0.4	-
24.10	- 24.28	24.19	0.18	argille	11.7	0.4-0.8	2.70	0.5	-
24.28	- 24.36	24.32	0.08	torbe	10.9	0.4-0.8	2.70	0.4	-
24.36	- 24.46	24.41	0.10	argille	11.6	0.4-0.8	2.71	0.4	-
24.46	- 24.64	24.55	0.18	torbe	8.3	0.4-0.8	2.72	0.2	-
24.64	- 24.66	24.65	0.02	argille	7.9	0.4-0.8	2.72	0.2	-
24.66	- 24.90	24.78	0.24	limi argillosi e argille limose	11.0	0.8-1.1	2.76	0.4	-
24.90	- 25.10	25.00	0.20	argille	13.3	0.4-0.8	2.77	0.5	-
25.10	- 25.14	25.12	0.04	torbe	12.7	0.4-0.8	2.77	0.5	-
25.14	- 25.20	25.17	0.06	argille	13.7	0.4-0.8	2.77	0.6	-
25.20	- 25.30	25.25	0.10	limi argillosi e argille limose	16.1	0.8-1.1	2.79	0.7	-
25.30	- 25.72	25.51	0.42	argille	15.3	0.4-0.8	2.84	0.7	-
25.72	- 25.80	25.76	0.08	limi argillosi e argille limose	13.8	0.8-1.1	2.83	0.6	-
25.80	- 26.20	26.00	0.40	limi e limi sabbiosi	19.9	0.8-1.1	2.89	1.0	<32
26.20	- 26.56	26.38	0.36	limi argillosi e argille limose	19.9	0.8-1.1	2.93	1.0	-
26.56	- 26.58	26.57	0.02	argille	17.0	0.4-0.8	2.91	0.8	-
26.58	- 26.84	26.71	0.26	limi argillosi e argille limose	17.0	0.8-1.1	2.95	0.8	-
26.84	- 26.88	26.86	0.04	argille	15.7	0.4-0.8	2.94	0.7	-
26.88	- 27.44	27.16	0.56	limi argillosi e argille limose	14.1	0.8-1.1	3.03	0.6	-
27.44	- 27.64	27.54	0.20	limi e limi sabbiosi	15.8	0.8-1.1	3.04	0.7	<32
27.64	- 27.66	27.65	0.02	limi argillosi e argille limose	14.7	0.8-1.1	3.03	0.6	-
27.66	- 27.68	27.67	0.02	limi e limi sabbiosi	15.2	0.8-1.1	3.03	0.6	<32
27.68	- 27.70	27.69	0.02	limi argillosi e argille limose	13.2	0.8-1.1	3.04	0.5	-
27.70	- 27.90	27.80	0.20	limi e limi sabbiosi	15.3	0.8-1.1	3.07	0.6	<32
27.90	- 27.96	27.93	0.06	limi argillosi e argille limose	14.3	0.8-1.1	3.07	0.6	-
27.96	- 27.98	27.97	0.02	limi e limi sabbiosi	16.4	0.8-1.1	3.07	0.7	<32
27.98	- 28.12	28.05	0.14	sabbie limose	44.0	0.8-1.1	3.09	-	<32
28.12	- 28.24	28.18	0.12	sabbie	54.4	0.8-1.1	3.10	-	<32
28.24	- 28.34	28.29	0.10	sabbie limose	50.8	0.8-1.1	3.11	-	<32
28.34	- 28.36	28.35	0.02	limi e limi sabbiosi	26.8	0.8-1.1	3.11	1.4	<32
28.36	- 28.38	28.37	0.02	limi argillosi e argille limose	21.3	0.8-1.1	3.11	1.0	-
28.38	- 28.46	28.42	0.08	torbe	17.0	0.4-0.8	3.12	0.7	-
28.46	- 28.50	28.48	0.04	argille	16.5	0.4-0.8	3.12	0.7	-
28.50	- 28.76	28.63	0.26	limi argillosi e argille limose	14.8	0.8-1.1	3.16	0.6	-
28.76	- 28.98	28.87	0.22	limi e limi sabbiosi	22.4	0.8-1.1	3.19	1.1	<32
28.98	- 29.04	29.01	0.06	limi argillosi e argille limose	16.2	0.8-1.1	3.18	0.7	-
29.04	- 29.06	29.05	0.02	limi e limi sabbiosi	15.7	0.8-1.1	3.18	0.7	<32
29.06	- 29.10	29.08	0.04	limi argillosi e argille limose	15.3	0.8-1.1	3.19	0.6	-
29.10	- 29.26	29.18	0.16	limi e limi sabbiosi	18.5	0.8-1.1	3.21	0.8	<32
29.26	- 29.88	29.57	0.62	limi argillosi e argille limose	17.8	0.8-1.1	3.31	0.8	-
29.88	- 30.00	29.94	0.12	limi e limi sabbiosi	16.4	0.8-1.1	3.29	0.7	<32

CLASSE (RAVENNA) – SCUOLA ELEMENTARE - VIA ROMEA S. 247


Start recording: 10/03/08 13:10:40 End recording: 10/03/08 13:30:41
 Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
 Trace length: 0h20'00". Analyzed 82% trace (manual window selection)
 Sampling frequency: 128 Hz
 Window size: 20 s
 Smoothing window: Triangular window, Smoothing: 5%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. HVSR at 8.38 ± 2.23 Hz. (in the range 0.0 - 64.0 Hz).

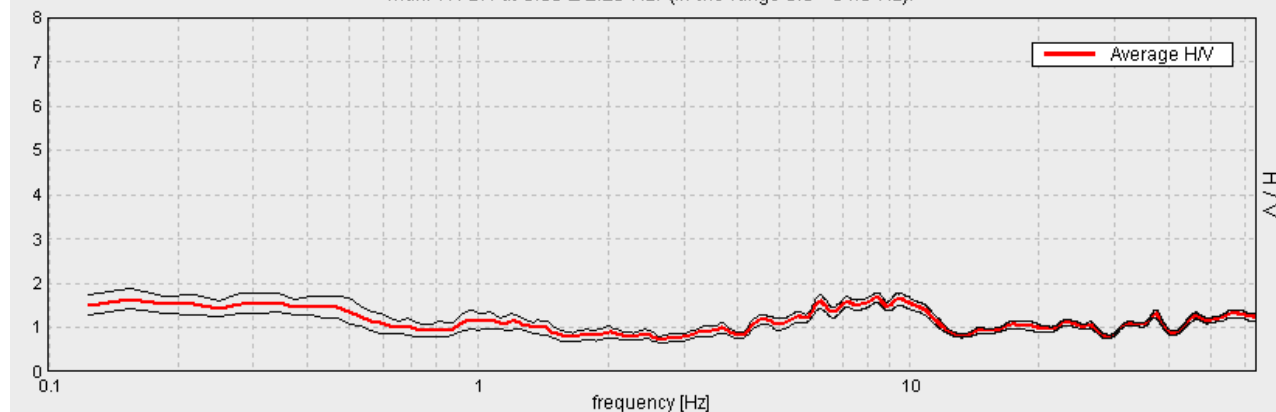


H/V TIME HISTORY

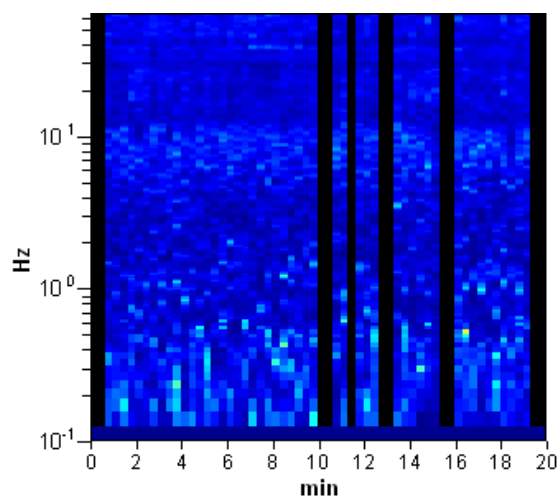


DIRECTIONAL H/V

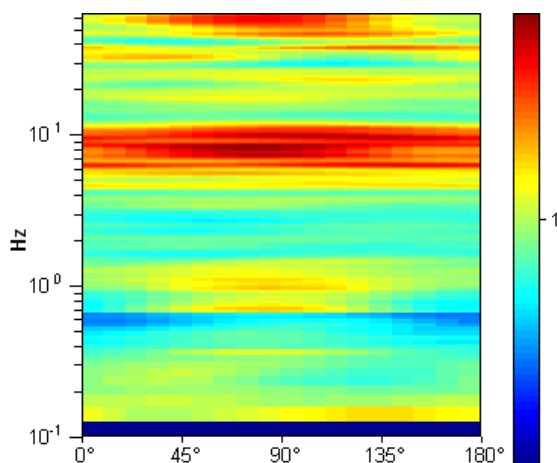


SINGLE COMPONENT SPECTRA

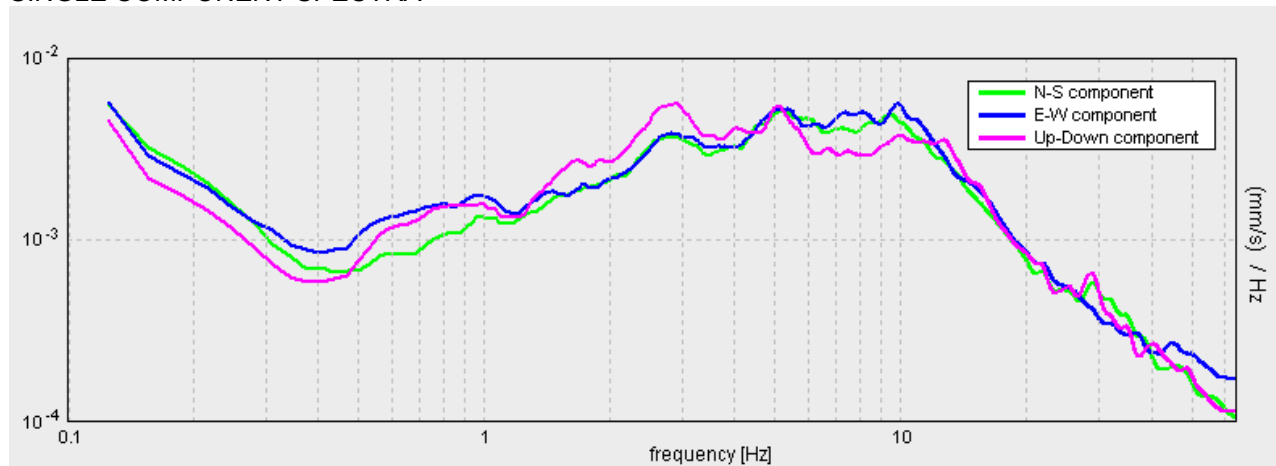

EXPERIMENTAL VS. SYNTHETIC H/V

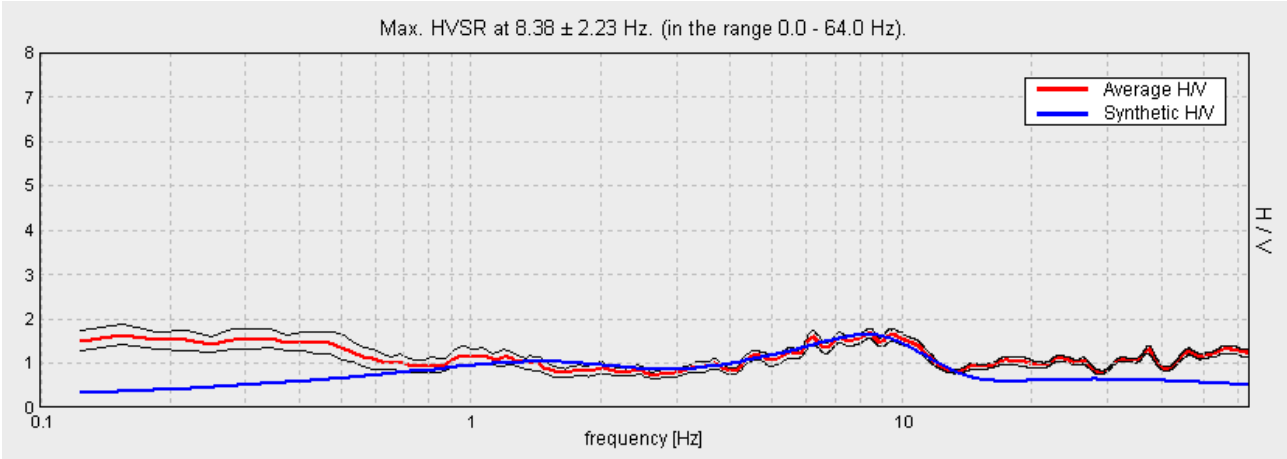

Profondità base del livello [m]	Spessore [m]	Vs [m/s]
4.00	4.00	150
19.00	15.00	250
29.00	10.00	200
inf.	inf.	300

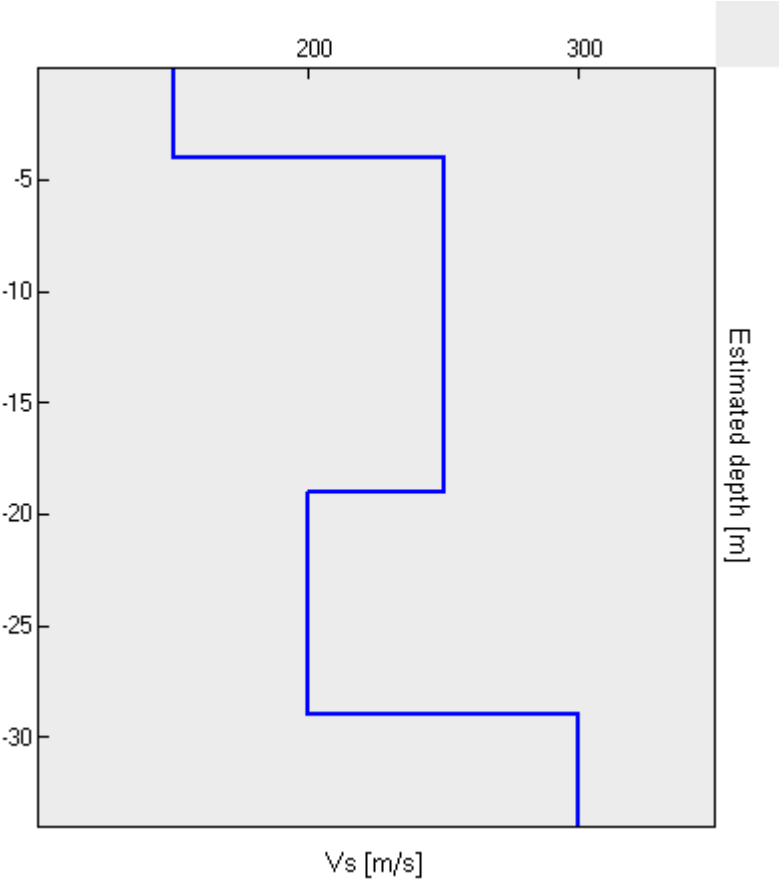

[According to the Sesame, 2005 guidelines. Please read carefully the [Grilla](#) manual before interpreting the following tables.]

Max. HVSR at 8.38 ± 2.23 Hz. (in the range 0.0 - 64.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$8.38 > 0.50$	OK	
$n_c(f_0) > 200$	$8207.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 403 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	4.125 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	12.844 Hz	OK	
$A_0 > 2$	$1.67 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.13119 < 0.05$		NO
$\sigma_f < \sigma(f_0)$	$1.09872 < 0.41875$		NO
$\sigma_A(f_0) < \sigma(f_0)$	$0.0563 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\sigma(f_0)$	threshold value for the stability condition $\sigma_f < \sigma(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\sigma(f_0)$	threshold value for the stability condition $\sigma_A(f) < \sigma(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\sigma(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\sigma(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\sigma(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


RAVENNA - VIA DEI PINI, VIA DEI PINI TR01

Start recording: 08/04/09 14:21:47 End recording: 08/04/09 14:41:48


GPS data not available

Trace length: 0h20'00". Analyzed 85% trace (manual window selection)
 Sampling frequency: 128 Hz
 Window size: 20 s
 Smoothing window: Triangular window
 Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

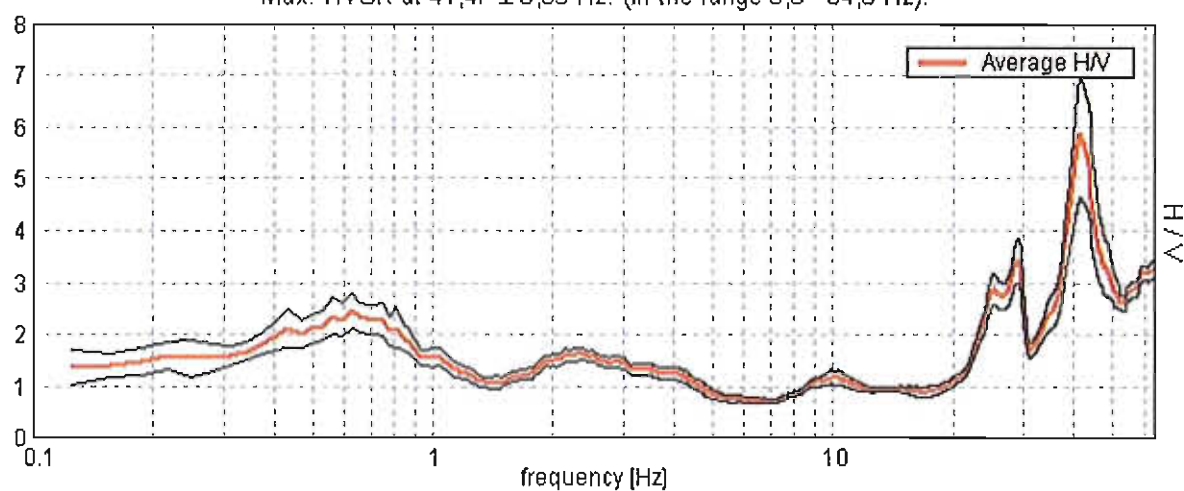Max. HVS2 at $41,47 \pm 0,33$ Hz. (in the range 0,0 - 64,0 Hz).


H/V TIME HISTORY

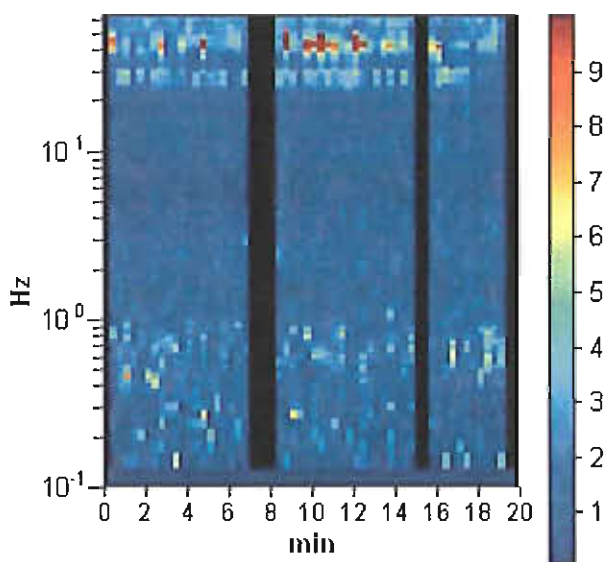

DIRECTIONAL H/V

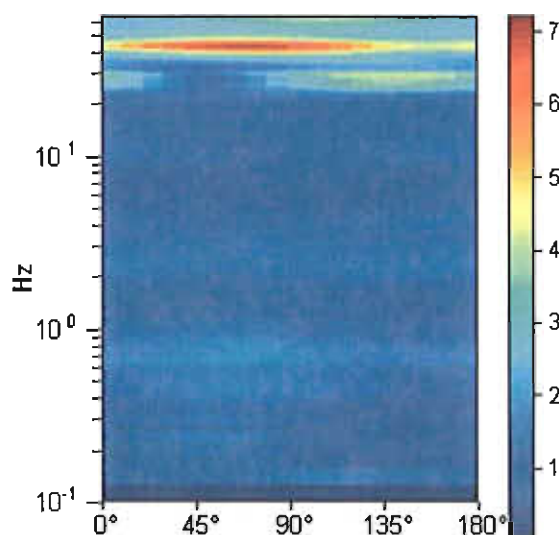


SINGLE COMPONENT SPECTRA

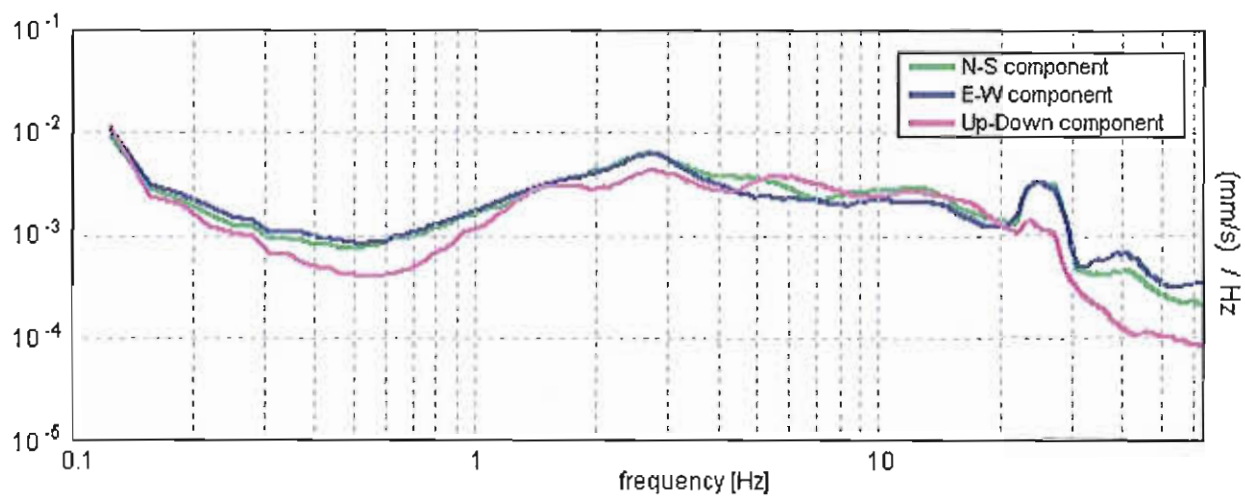

EXPERIMENTAL VS. SYNTHETIC H/V

Max. HVSR at $41,47 \pm 0,33$ Hz. (in the range 0,0 - 64,0 Hz).

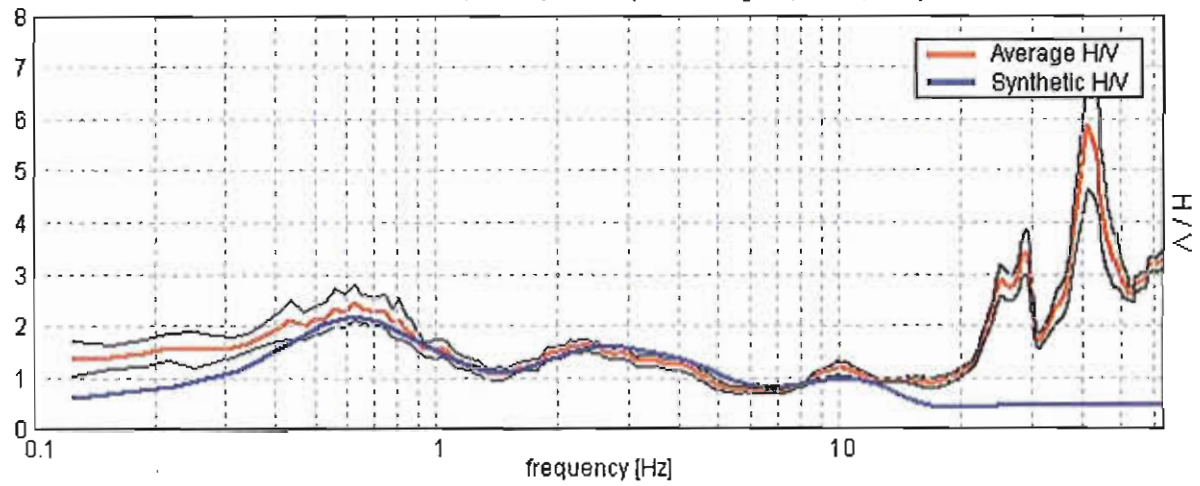


Depth at the bottom of the layer
[m]

Thickness [m]

Vs [m/s]

1.50	1.50	65
7.00	5.50	110
17.00	10.00	180
27.00	10.00	230
39.00	12.00	260
77.00	38.00	270
197.00	120.00	440
inf.	inf.	590

$V_s(0.0-30.0)=163\text{m/s}$

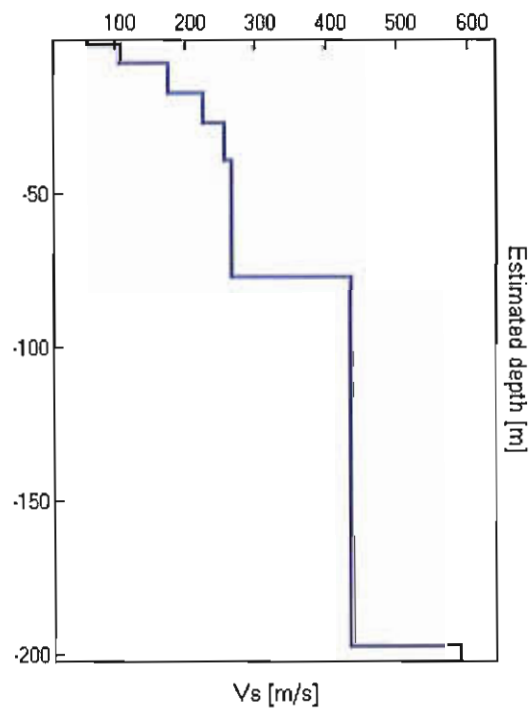

[According to the Sesame, 2005 guidelines. Please read carefully the **Grilla** manual before interpreting the following tables.]

Max. HVSR at $41,47 \pm 0,33$ Hz. (in the range 0,0 - 64,0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$41.47 > 0.50$	OK	
$n_c(f_0) > 200$	$42298.1 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 1386 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]


Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	37.031 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	50.25 Hz	OK	
$A_0 > 2$	$5.86 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.00394 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.16319 < 2.07344$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.6008 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Allegato 3 – Spettro di dispersione

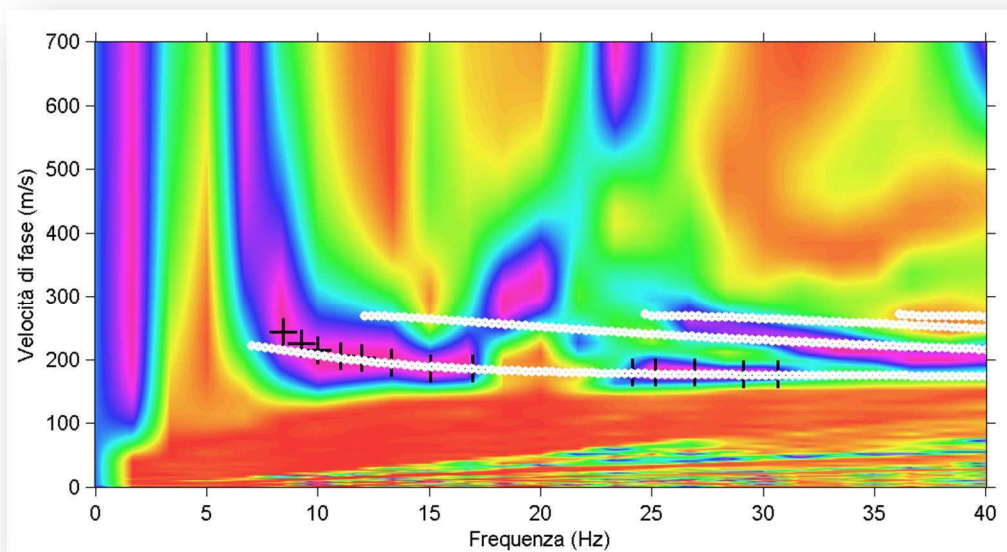


in alto: Spettro frequenza-velocità di fase dei dati acquisiti durante l'indagine. Sovrimposti allo spettro sono il picking del modo fondamentale (crochette nere) e le curve di dispersione sintetiche del modo fondamentale e di alcuni modi superiori (pallini bianchi).


in basso: Curva H/V **(A)** e andamento delle tre componenti velocimetriche (N-S, E-W, Up-Down) **(B)**

HVSR3A

A

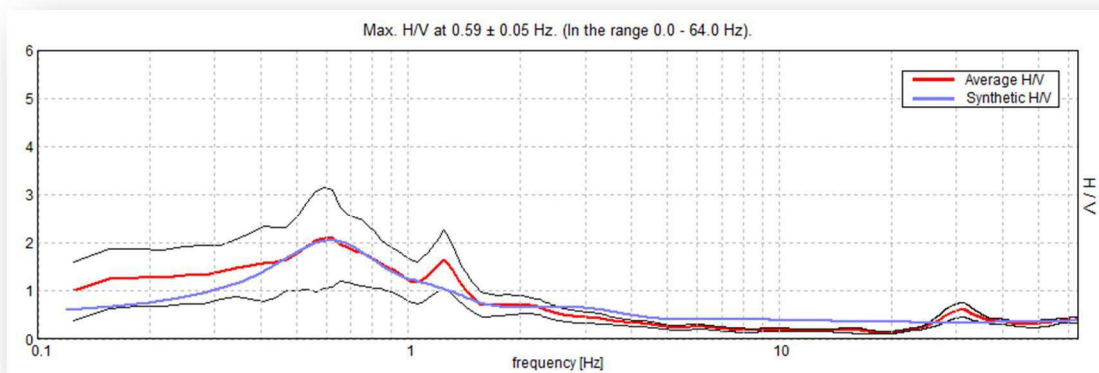


B

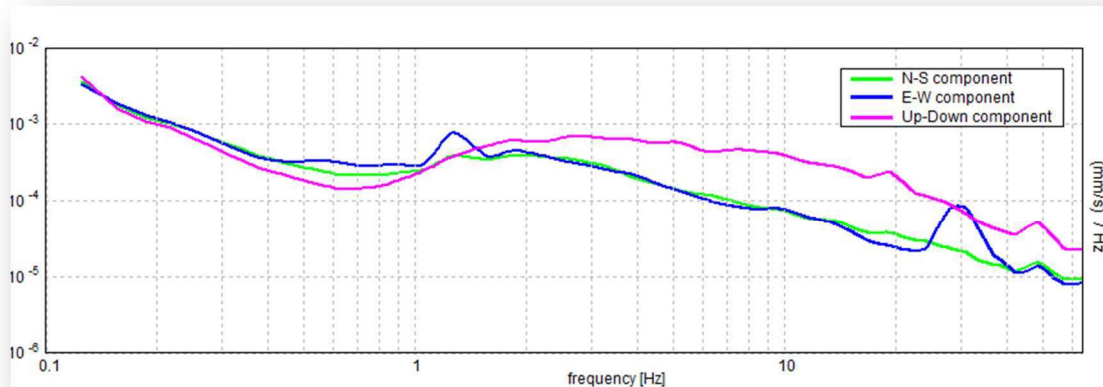


MASW3A

Allegato 2 – Sismogrammi

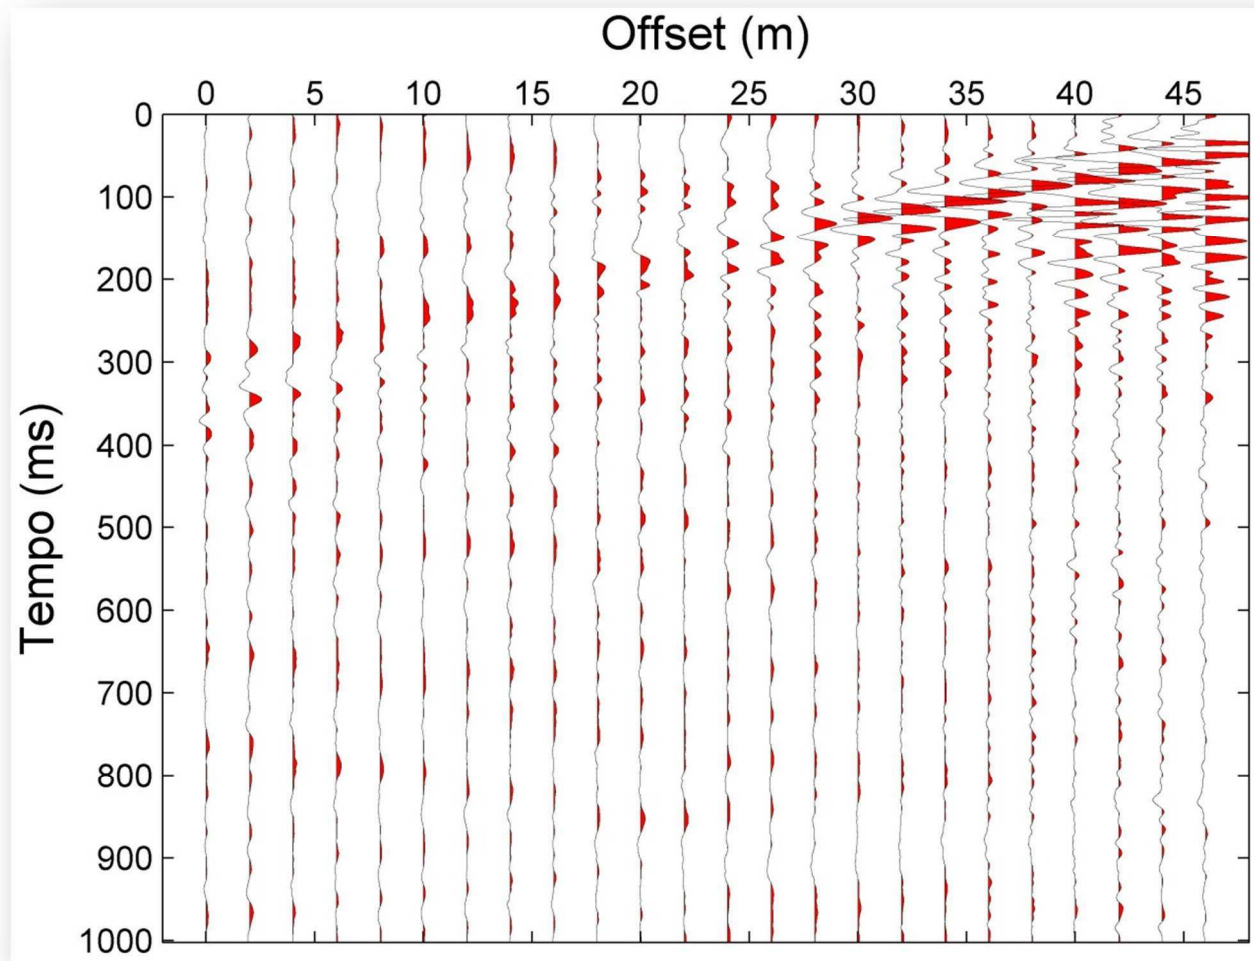

Sismogrammi acquisiti dai 24 geofoni durante l'indagine. La sorgente è posta ad una distanza di 8 m dal geofono 24. La spaziatura tra i geofoni è di 2 m.

Allegato 4 – Velocità onde S in funzione della profondità

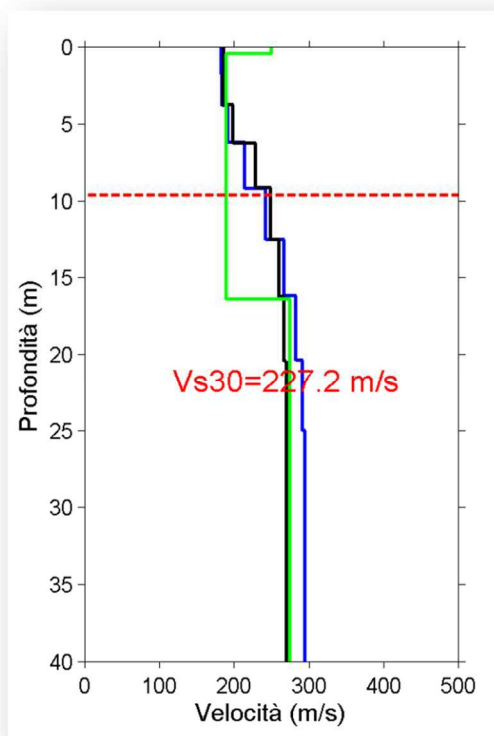
A**B**

Spessore (m)	Vs WaveEq (m/s)	Spessore (m)	Vs SWAMI (m/s)	Spessore (m)	Vs HVSr (m/s)
1.7	185.9	1.7	183.3	0.4	250.0
2.1	185.4	2.1	184.3	16.0	190.0
2.5	198.4	2.4	191.8	50.0	275.0
2.9	228.5	3.0	213.7	125.0	445.0
3.3	248.4	3.3	242.7	inf	670.0
3.7	260.5	3.7	267.3		
4.2	267.1	4.2	283.0		
4.6	269.3	4.6	291.2		
15.0	269.5	15.0	294.8		
inf	269.5	inf	295.0		

(B) La prima, terza e quinta colonna riportano gli spessori degli strati dei modelli ottenuti dall'indagine MASW (colonne 1 e 3) e dall'indagine HVSr (colonna 5). La seconda e la quarta colonna contengono le velocità stimate attraverso la tecnica MASW utilizzando i programmi WaveEq e SWAMI; la sesta colonna riporta le velocità stimate mediante inversione della curva H/V. Sono evidenziati in azzurro i valori di velocità e i relativi spessori utilizzati per il calcolo del parametro V_{s30} ;

(C) andamento del parametro V_{s30} in funzione della variazione della profondità del piano fondale della struttura in progetto. Le linee in tratteggio di colore verde indicano i limiti 180 m/s e 360 m/s rispetto alla tabella 1 (cfr. §2).

(A) Andamento della velocità delle onde S in funzione della profondità. Vengono riportati in nero i valori ottenuti con il programma WaveEq (Geometrics) e in blu i valori derivati con il programma SWAMI (Georgia Institute of Technology), relativamente all'indagine MASW; in verde viene indicato l'andamento ottenuto mediante inversione della curva H/V, vincolata nella parte superficiale attraverso i valori ottenuti dall'indagine MASW. La linea tratteggiata in rosso rappresenta la profondità stimata per la frequenza più bassa scelta durante l'operazione di *picking*. A profondità maggiori l'andamento delle velocità delle onde S è stimato mediante *fit* della curva H/V.

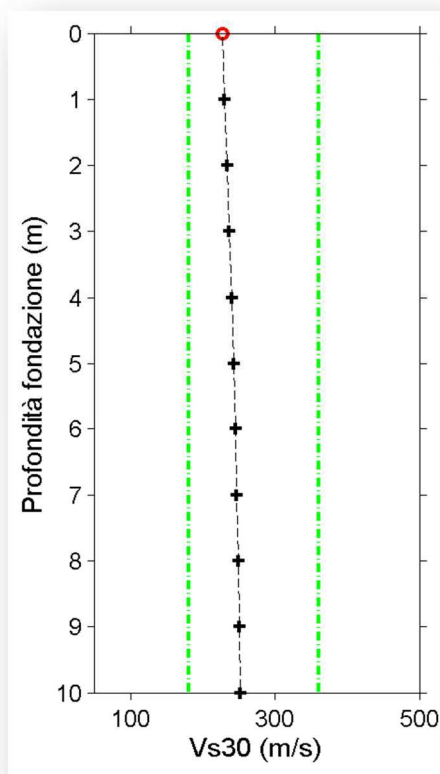C

RILEVAZIONE TROMOGRAFICA – RAPPORTO DI PROVA 13.025-1.TR1

13025 RAVENNA, TEATRO RASI TR1

Strumento: TEN-0006/01-07

Inizio registrazione: 10/10/13 11:00:52

Fine registrazione: 10/10/13 11:30:53

Nomi canali: NORTH SOUTH; EAST WEST ; UP DOWN

Durata registrazione: 0h30'00".

Analizzato 83% tracciato (selezione manuale)


Freq. campionamento: 128 Hz

Lunghezza finestre: 20 s


Tipo di lisciamento: Triangular window

Lisciamento: 10%


RAPPORTO SPETTRALE ORIZZONTALE SU VERTICALE

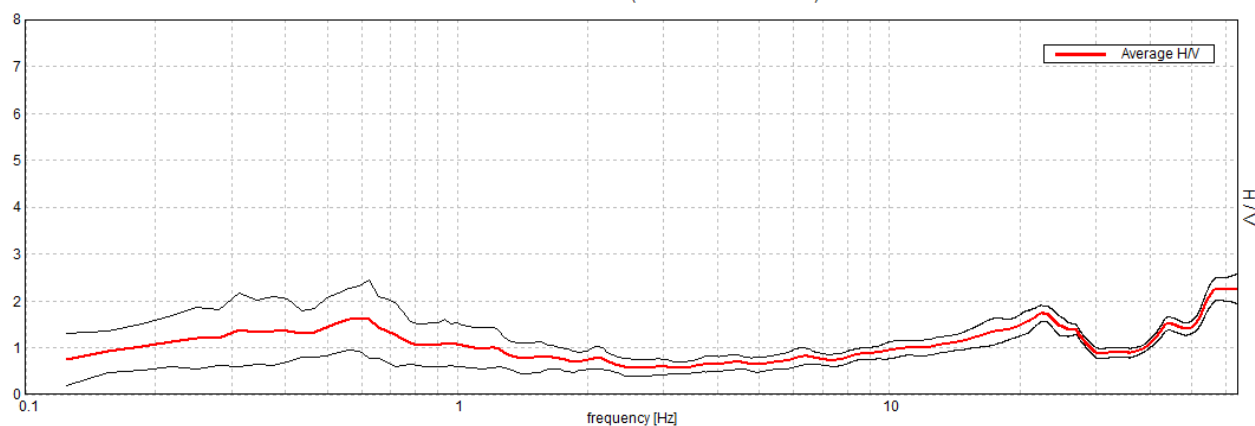Picco H/V a 61.5 ± 7.74 Hz (nell'intervallo 0.0 - 64.0 Hz).


SERIE TEMPORALE H/V

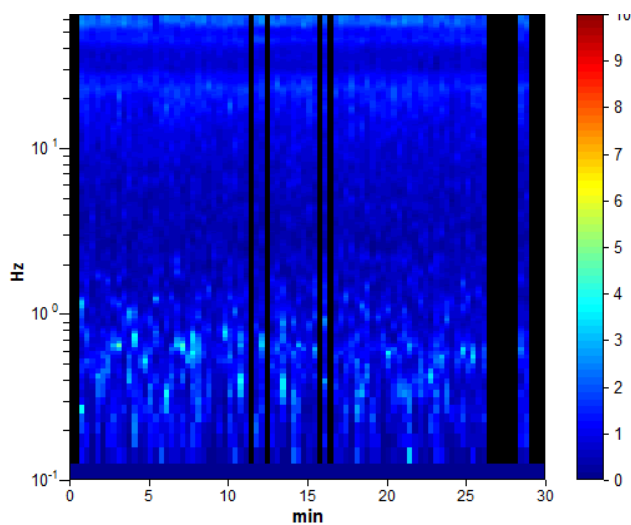

DIREZIONALITA' H/V

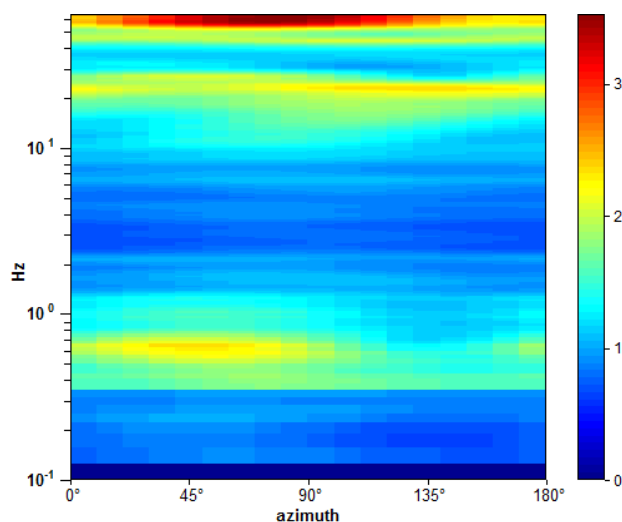


SPETTRI DELLE SINGOLE COMPONENTI

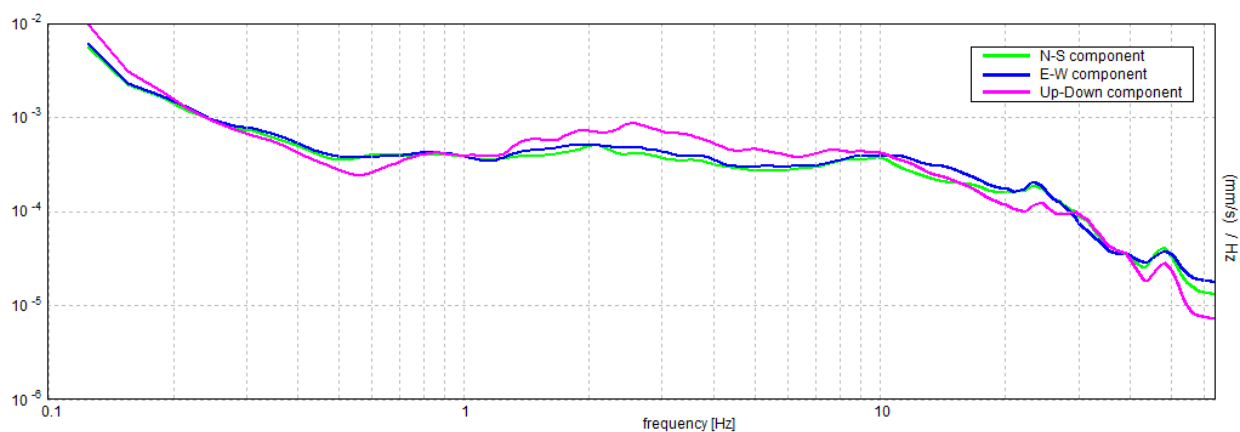


H/V SPERIMENTALE vs. H/V SINTETICO

Picco H/V a 61.5 ± 7.74 Hz (nell'intervallo 0.0 - 64.0 Hz).

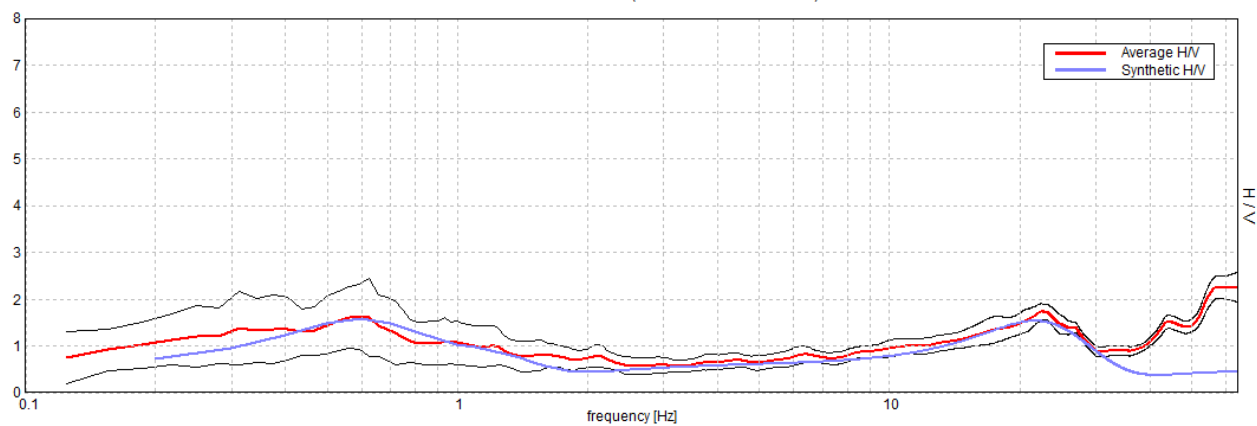

Profondità alla base dello strato [m]	Spessore [m]	Vs [m/s]
2.20	2.20	205
77.20	75.00	350
252.20	175.00	560
inf.	inf.	750

$V_s(0.0-30.0)=333\text{m/s}$

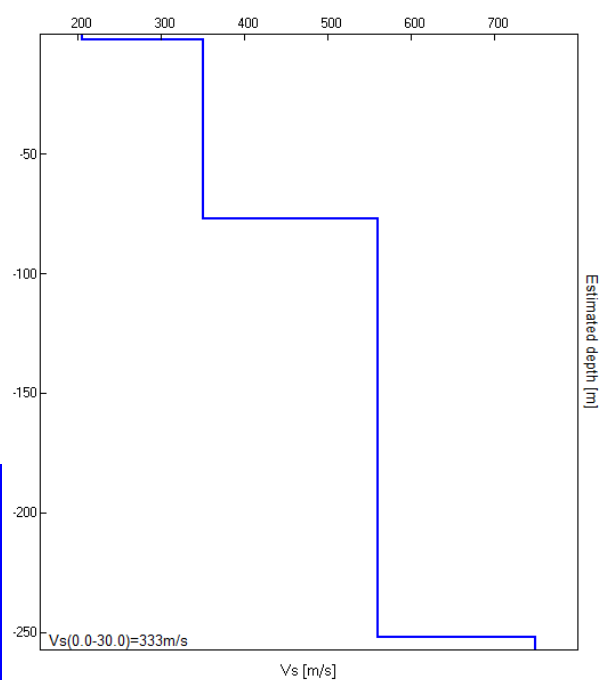

RILEVAZIONE TROMOGRAFICA – RAPPORTO DI PROVA 13.025-7.TR1**13025 RAVENNA, TEATRO ALIGHIERI TR1**

Instrument: TEN-0006/01-07

Start recording: 12/02/14 12:23:00

End recording: 12/02/14 12:37:01

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h14'00".




Analyzed 55% trace (manual window selection)


Sampling rate: 128 Hz

Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

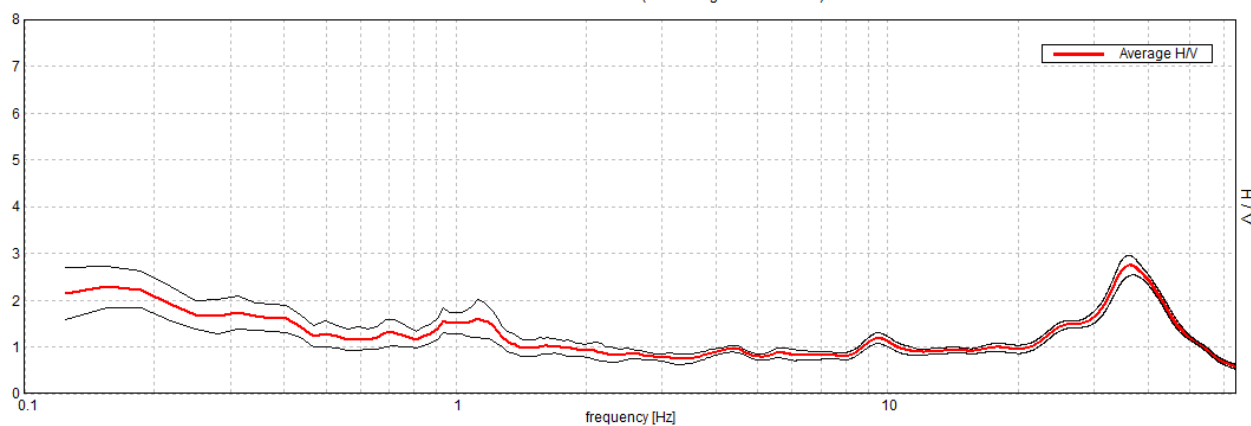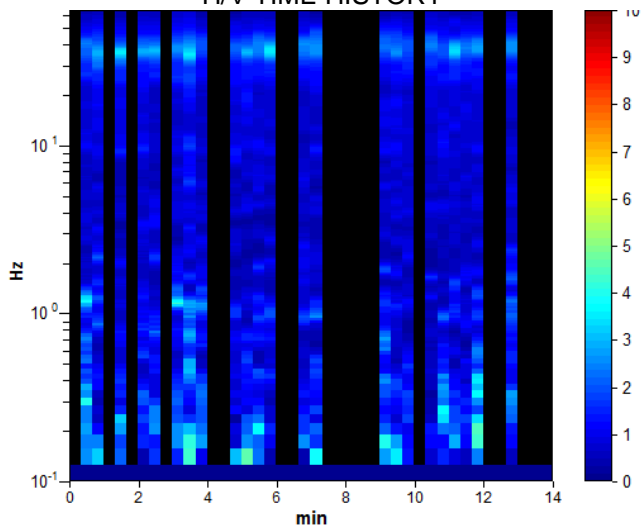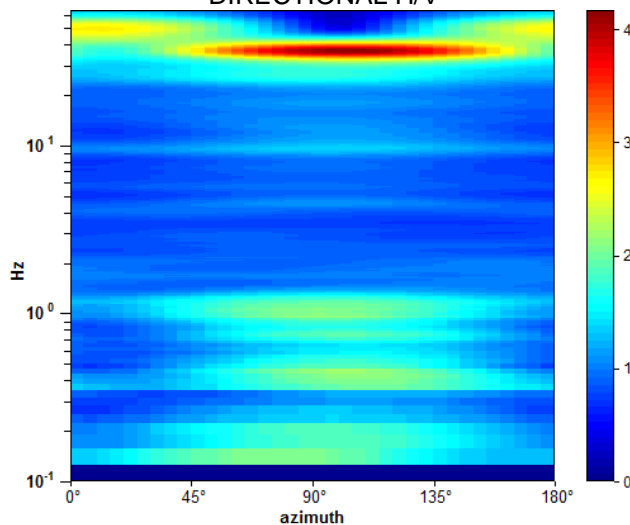HORIZONTAL TO VERTICAL SPECTRAL RATIOMax. H/V at 36.25 ± 10.63 Hz (in the range 0.0 - 64.0 Hz).**H/V TIME HISTORY****DIRECTIONAL H/V**

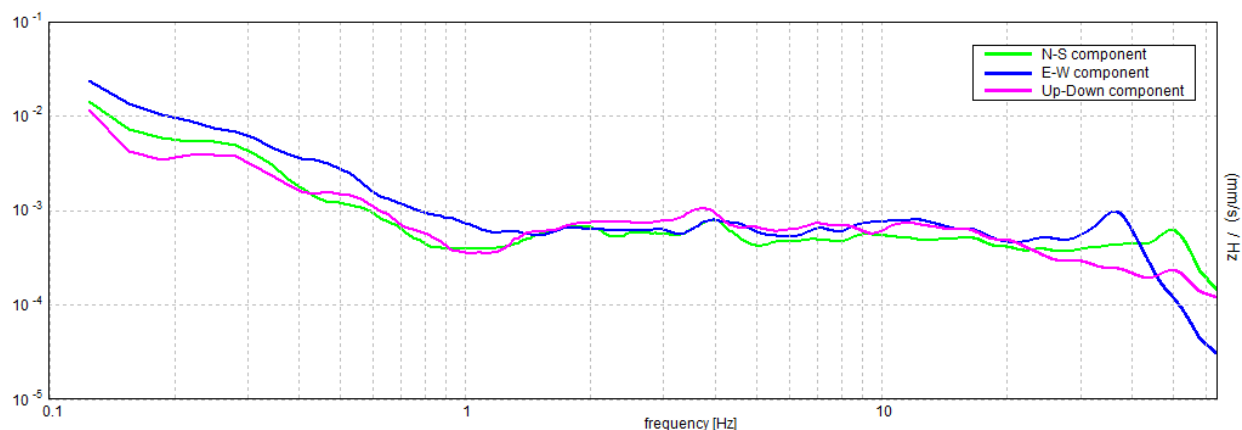

SINGLE COMPONENT SPECTRA


Max. H/V at 36.25 ± 10.63 Hz (in the range 0.0 - 64.0 Hz).

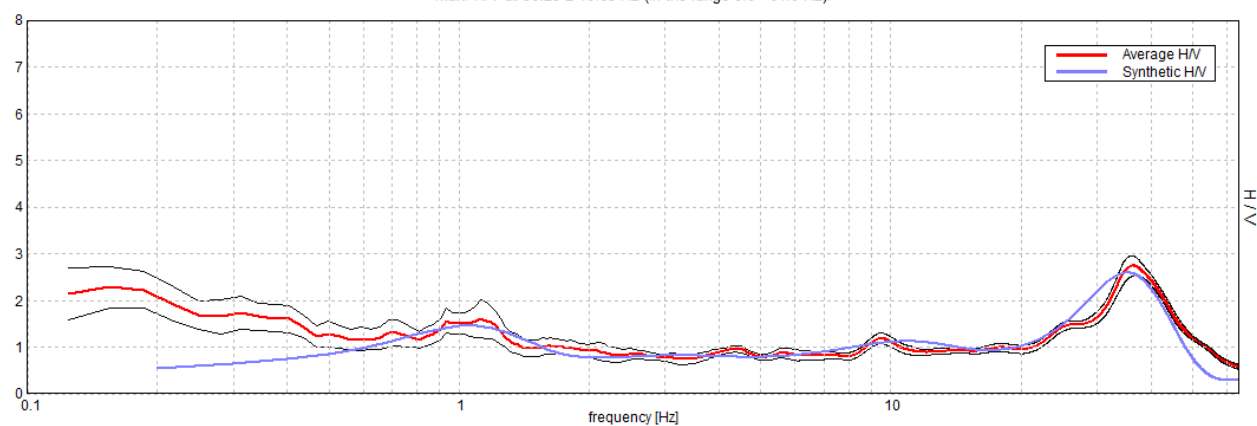

EXPERIMENTAL vs. SYNTHETIC H/V

Depth at the bottom of the layer [m]	Thickness [m]	Vs [m/s]	Poisson ratio
1.00	1.00	140	0.43
7.00	6.00	290	0.45
32.00	25.00	390	0.43
62.00	30.00	480	0.42
122.00	60.00	520	0.42
inf.	inf.	720	0.42

$V_s(0.0-30.0)=346\text{m/s}$

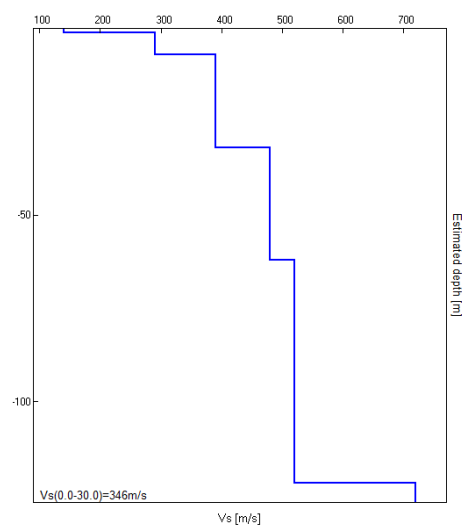

RILEVAZIONE TROMOGRAFICA – RAPPORTO DI PROVA 13.025-5.TR1**13025 RAVENNA, SAN NICOLÒ TR1**

Instrument: TEN-0006/01-07

Start recording: 13/02/14 13:23:00

End recording: 13/02/14 13:37:01

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

Trace length: 0h14'00".




Analyzed 55% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window

Smoothing: 10%

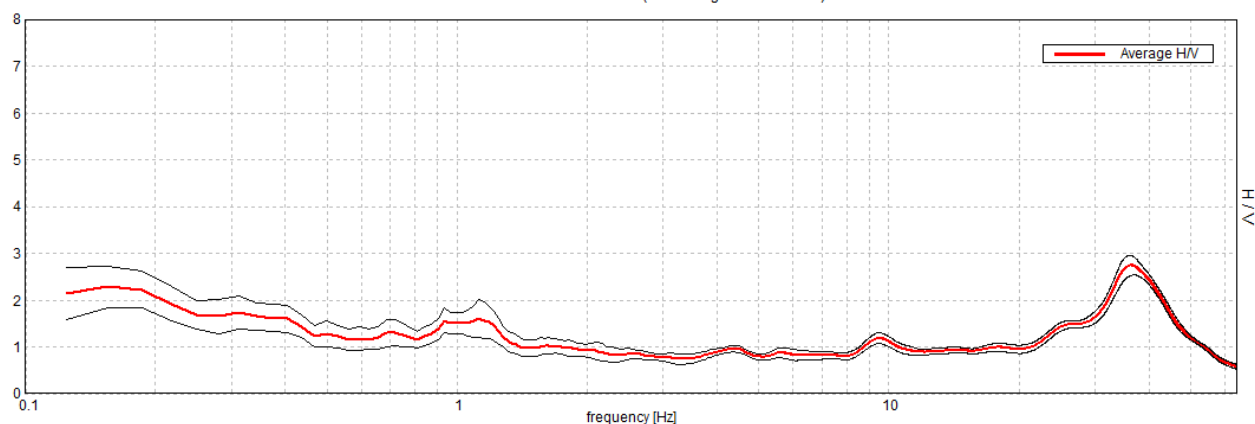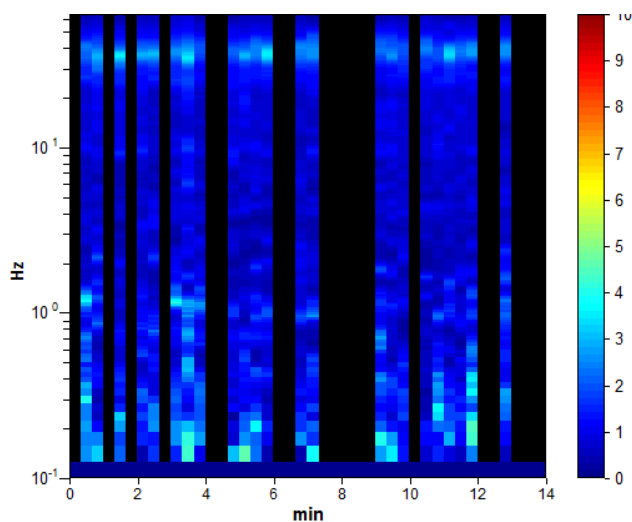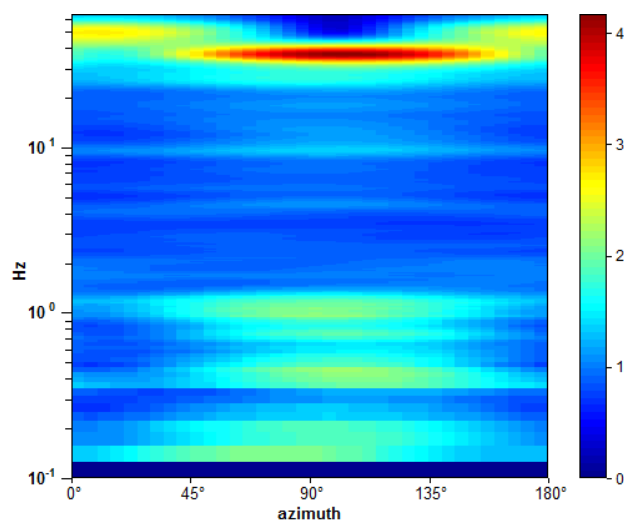
HORIZONTAL TO VERTICAL SPECTRAL RATIOMax. H/V at 36.25 ± 10.63 Hz (in the range 0.0 - 64.0 Hz).**H/V TIME HISTORY****DIRECTIONAL H/V**

SINGLE COMPONENT SPECTRA

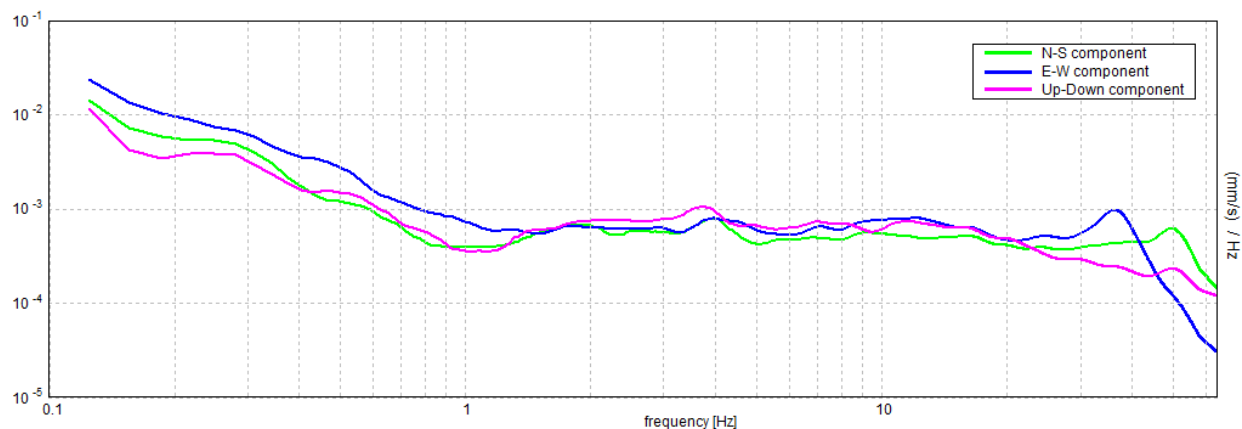


EXPERIMENTAL vs. SYNTHETIC H/V

Max. H/V at 36.25 ± 10.63 Hz (in the range 0.0 - 64.0 Hz).

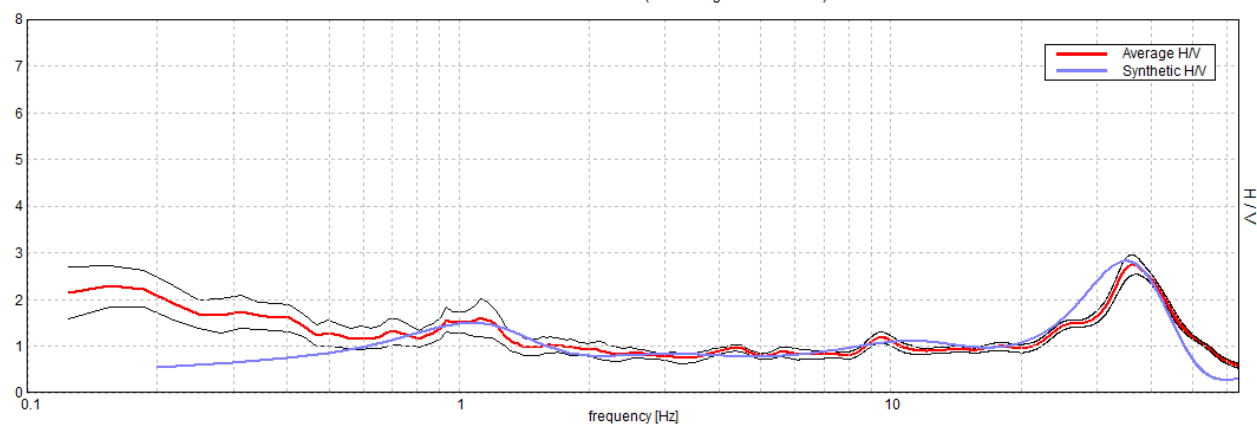

Depth at the bottom of the layer [m]	Thickness [m]	Vs [m/s]
1.00	1.00	138
7.00	6.00	292
32.00	25.00	388
62.00	30.00	485
122.00	60.00	525
inf.	inf.	730

$V_s(0.0-30.0)=345m/s$

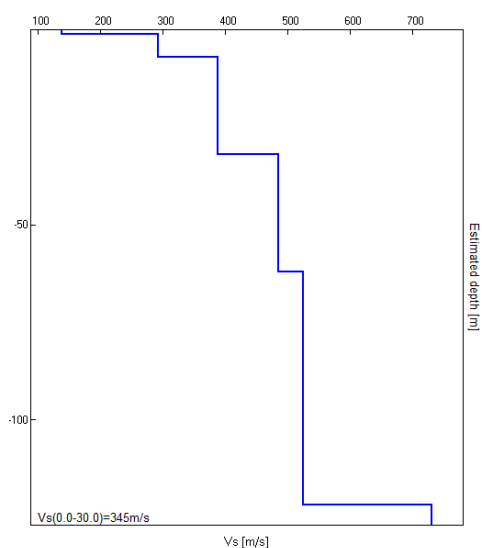

RILEVAZIONE TROMOGRAFICA – RAPPORTO DI PROVA 13.025-1.TR1**13025 RAVENNA, TEATRO RASI TR1**

Strumento: TEN-0006/01-07

Inizio registrazione: 10/10/13 11:00:52

Fine registrazione: 10/10/13 11:30:53

Nomi canali: NORTH SOUTH; EAST WEST ; UP DOWN

Durata registrazione: 0h30'00".




Analizzato 83% tracciato (selezione manuale)

Freq. campionamento: 128 Hz


Lunghezza finestre: 20 s

Tipo di lisciamento: Triangular window

Lisciamento: 10%

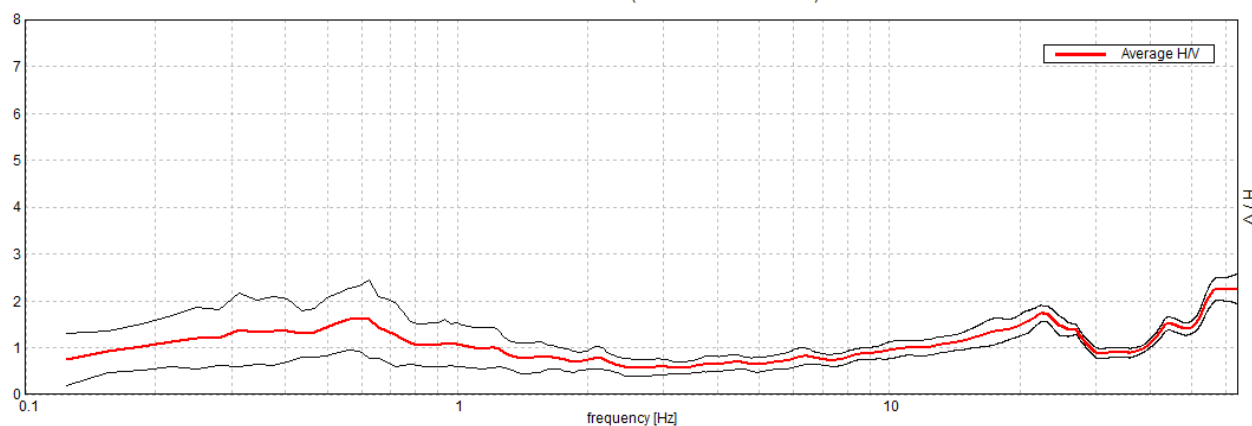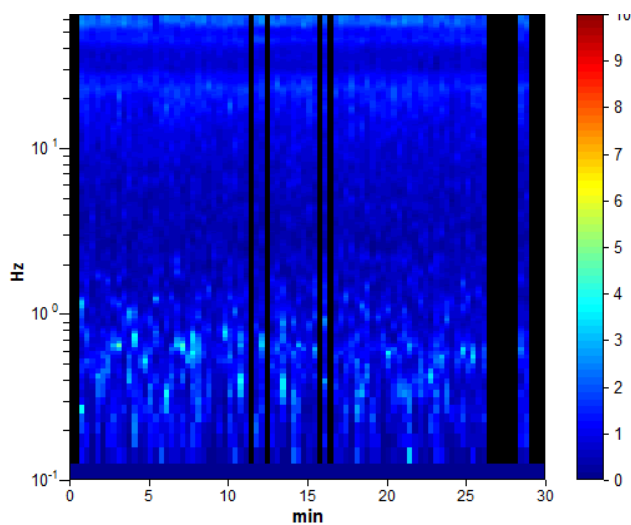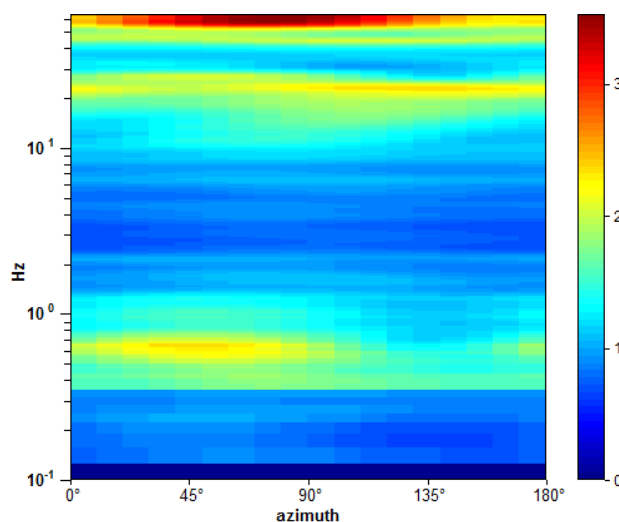
RAPPORTO SPETTRALE ORIZZONTALE SU VERTICALEPicco H/V a 61.5 ± 7.74 Hz (nell'intervallo 0.0 - 64.0 Hz).**SERIE TEMPORALE H/V****DIREZIONALITA' H/V**

SPETTRI DELLE SINGOLE COMPONENTI

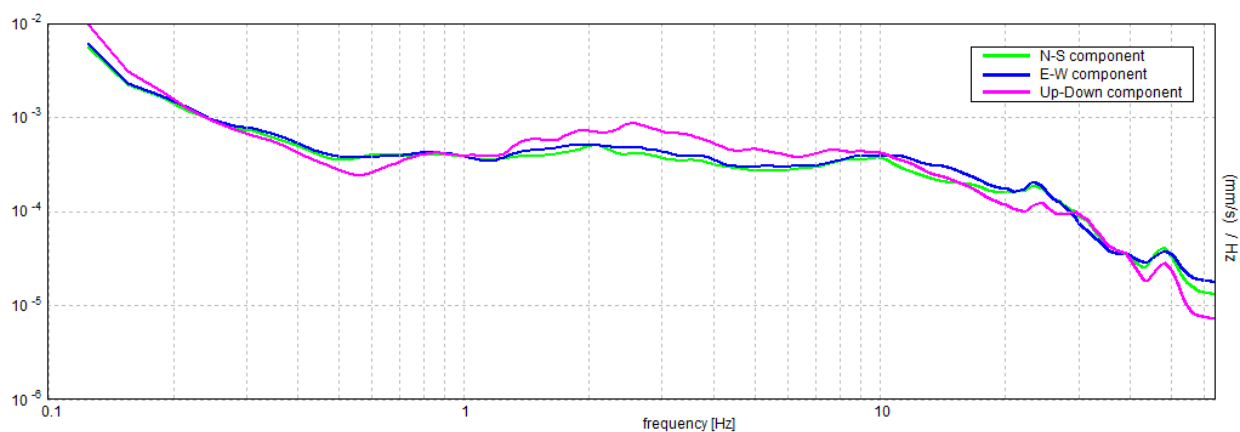


H/V SPERIMENTALE vs. H/V SINTETICO

Picco H/V a 61.5 ± 7.74 Hz (nell'intervallo 0.0 - 64.0 Hz).

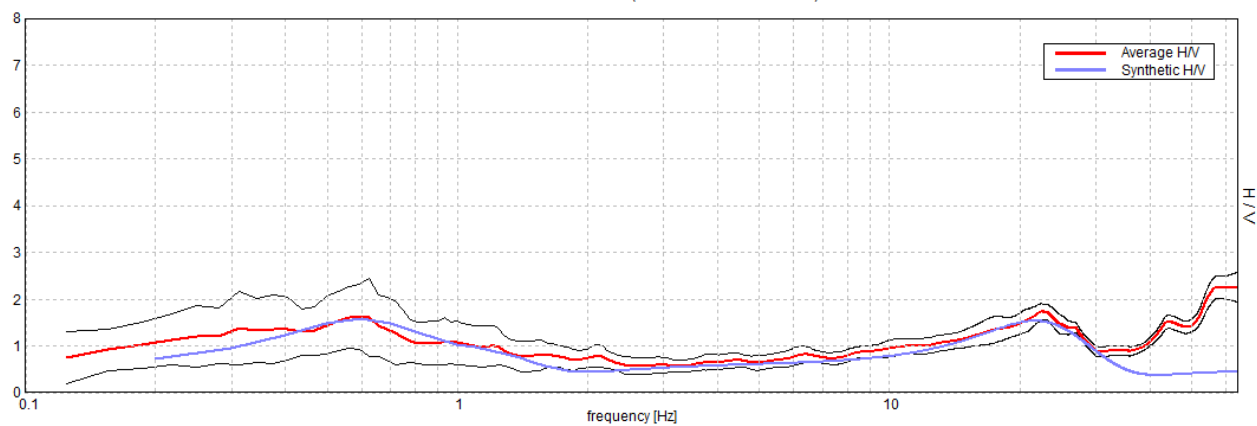

Profondità alla base dello strato [m]	Spessore [m]	Vs [m/s]
2.20	2.20	205
77.20	75.00	350
252.20	175.00	560
inf.	inf.	750

$V_s(0.0-30.0)=333\text{m/s}$

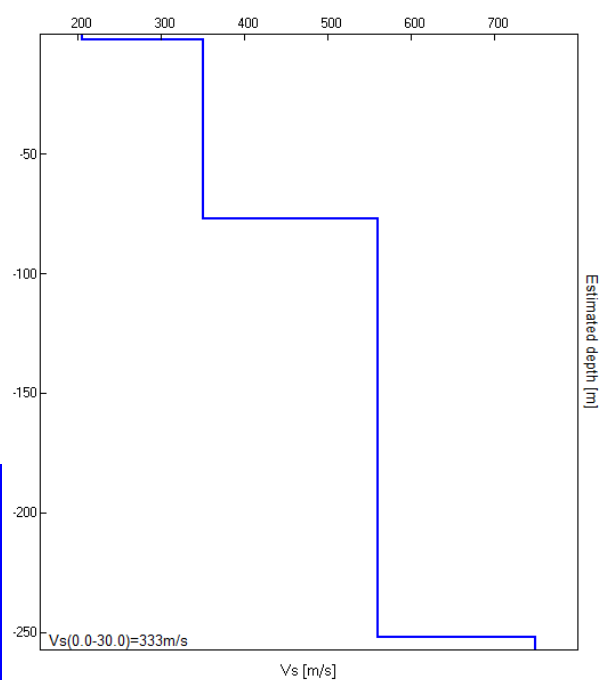

AUREAPROGETTI, VIA CAVOUR-VIA MORIGIA 2

Instrument: TRZ-0117/01-11

Start recording: 20/06/12 11:12:22 End recording: 20/06/12 11:32:22

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available




Trace length: 0h20'00". Analyzed 97% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window

Smoothing: 10%

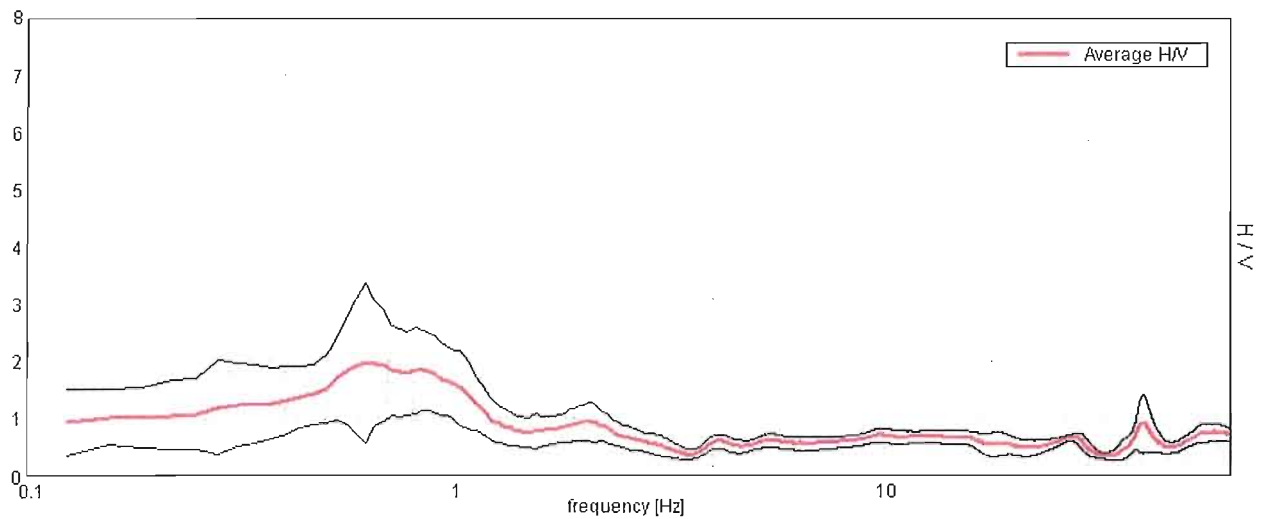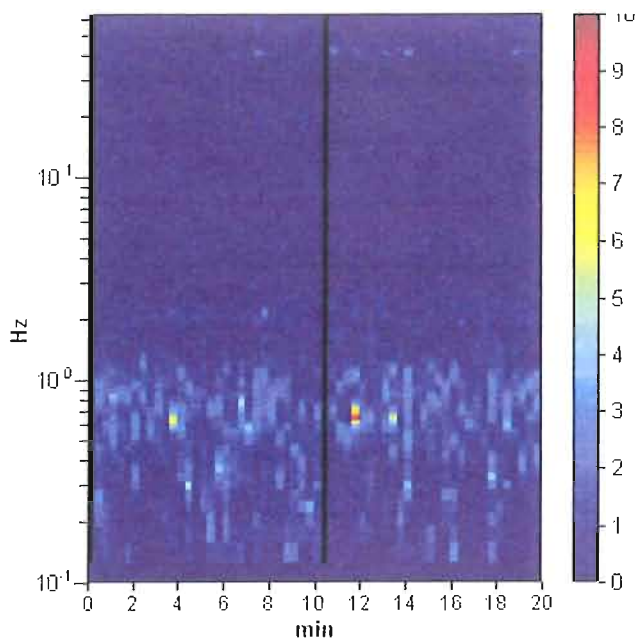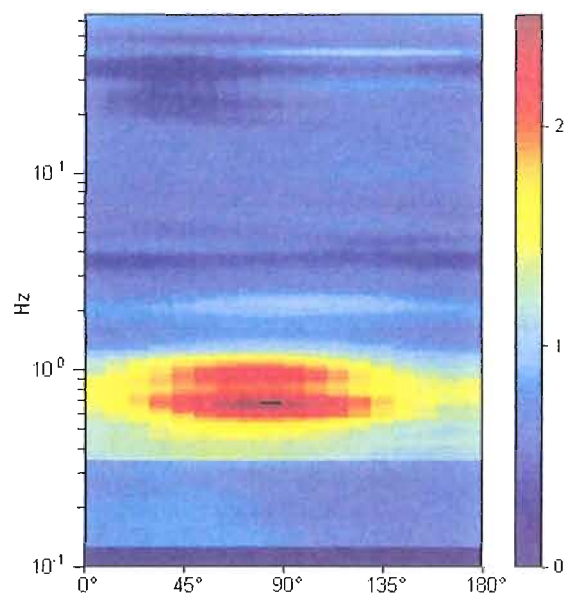
HORIZONTAL TO VERTICAL SPECTRAL RATIOMax. H/V at 0.63 ± 0.04 Hz. (In the range 0.0 - 64.0 Hz).**H/V TIME HISTORY****DIRECTIONAL H/V**

SINGLE COMPONENT SPECTRA

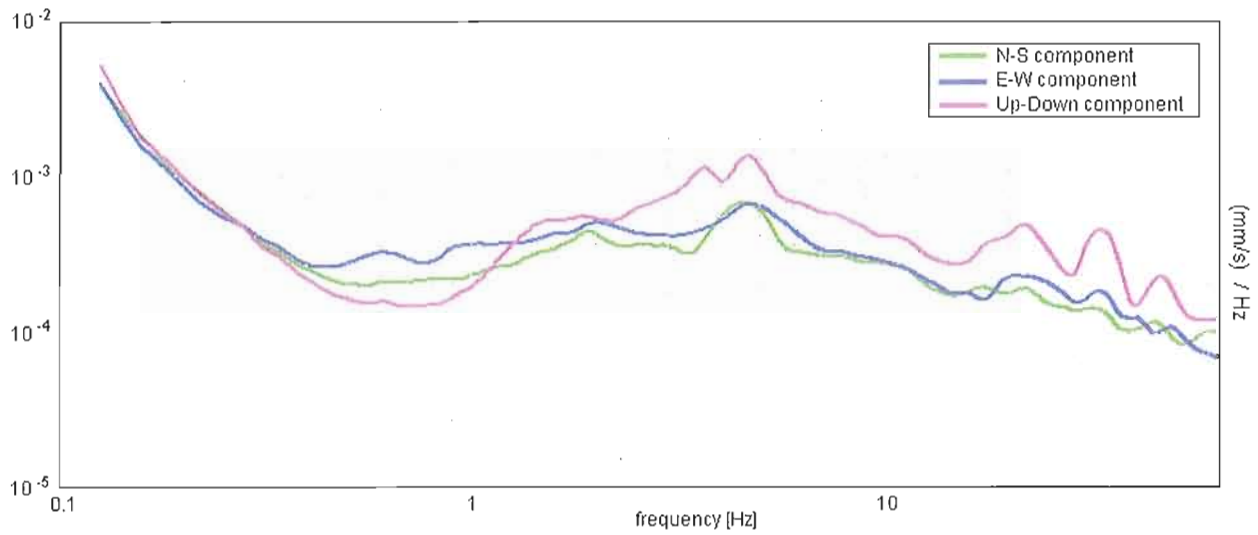


EXPERIMENTAL vs. SYNTHETIC H/V

Max. H/V at 0.63 ± 0.04 Hz. (In the range 0.0 - 64.0 Hz).

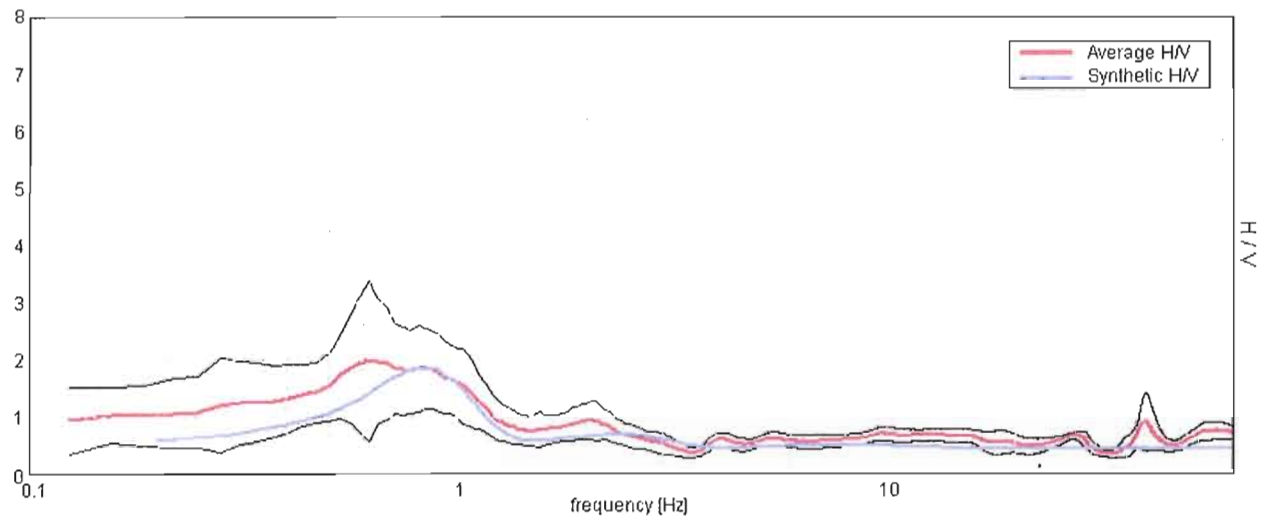

Depth at the bottom of the layer [m]	Thickness [m]	Vs [m/s]	Poisson ratio
5.00	5.00	140	0.35
7.00	2.00	170	0.35
14.00	7.00	130	0.35
25.00	11.00	230	0.35
58.00	33.00	200	0.35
inf.	inf.	380	0.35

$V_s(0.0-30.0)=172\text{m/s}$

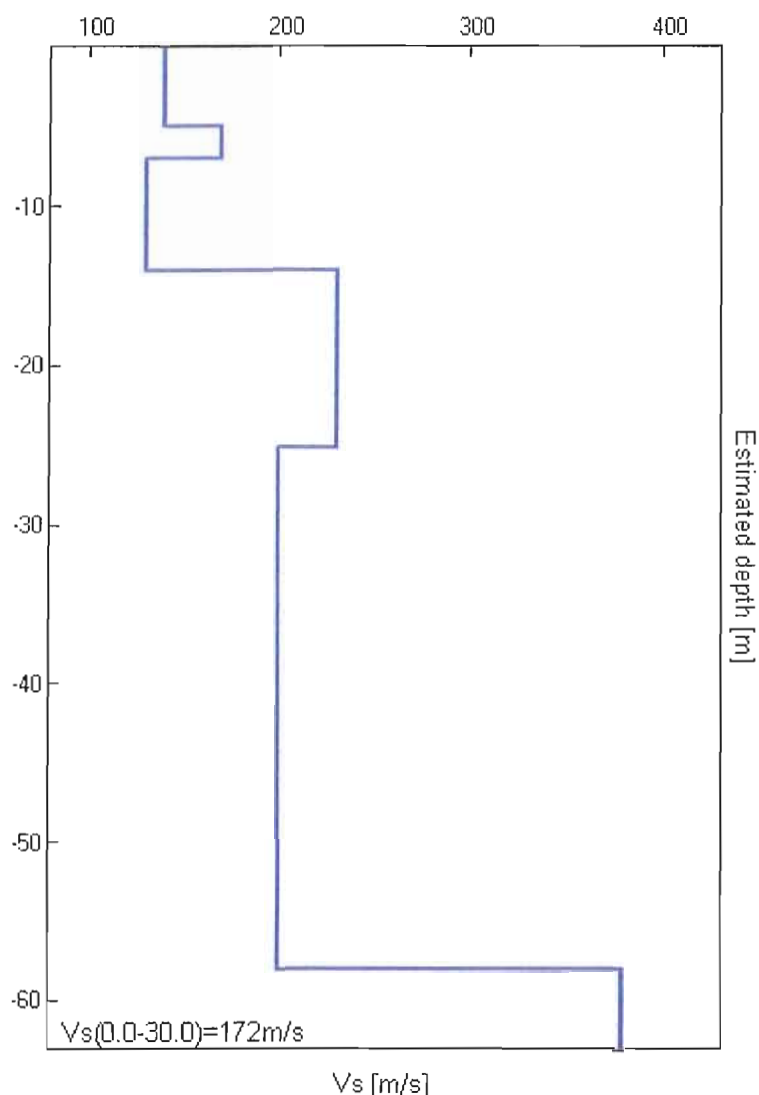

Max. H/V at 0.63 ± 0.04 Hz (in the range 0.0 - 64.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.63 > 0.50$	OK	
$n_c(f_0) > 200$	$725.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 31 times	OK	

Criteria for a clear H/V peak

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	1.25 Hz	OK	
$A_0 > 2$	$1.98 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.03009 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.0188 < 0.09375$	OK	
$\sigma_A(f_0) < 0(f_0)$	$0.6976 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$					
Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

**RILEVAZIONE TROMOGRAFICA – RAPPORTO DI PROVA 13.025-4.TR1****13025 RAVENNA, ALMAGIA' TR1**

Instrument: TEN-0006/01-07

Start recording: 13/02/14 14:08:07

End recording: 13/02/14 15:11:26

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 1h03'12".




Analyzed 96% trace (automatic window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window

Smoothing: 10%

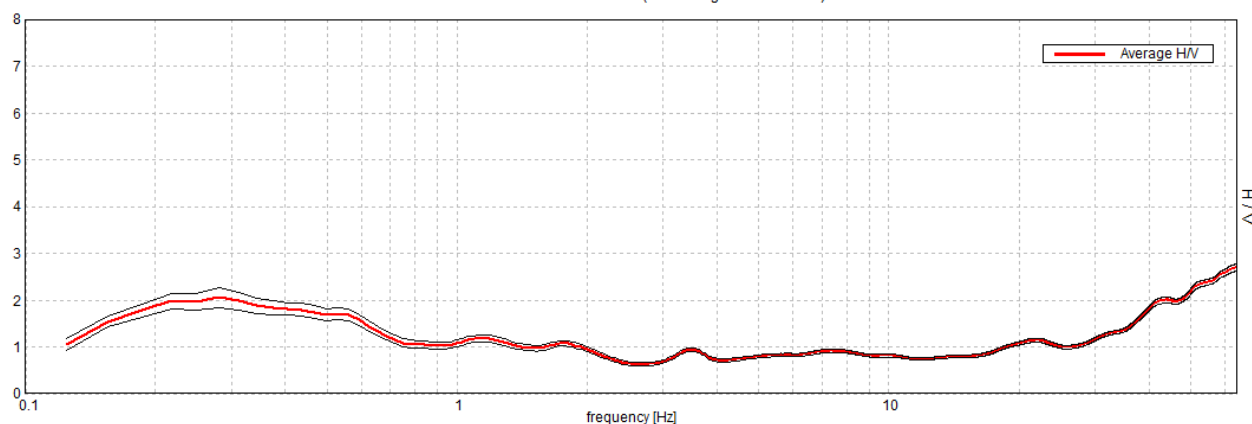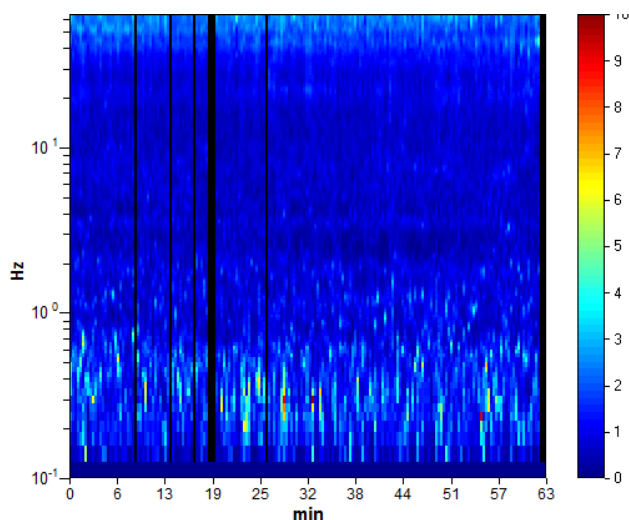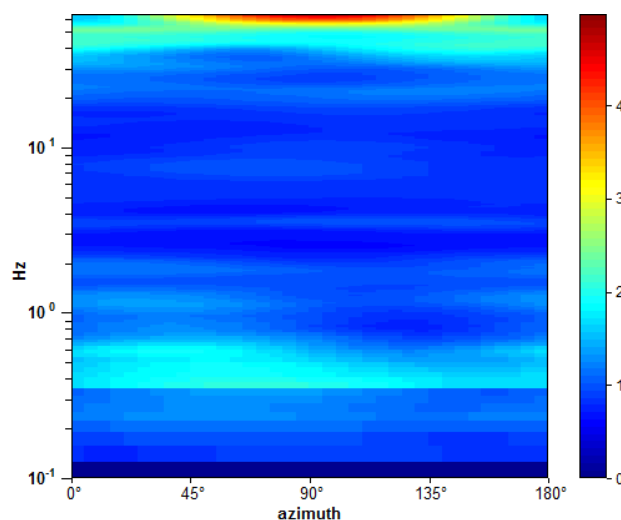
HORIZONTAL TO VERTICAL SPECTRAL RATIOMax. H/V at 63.97 ± 15.45 Hz (in the range 0.0 - 64.0 Hz).**H/V TIME HISTORY****DIRECTIONAL H/V**

SINGLE COMPONENT SPECTRA

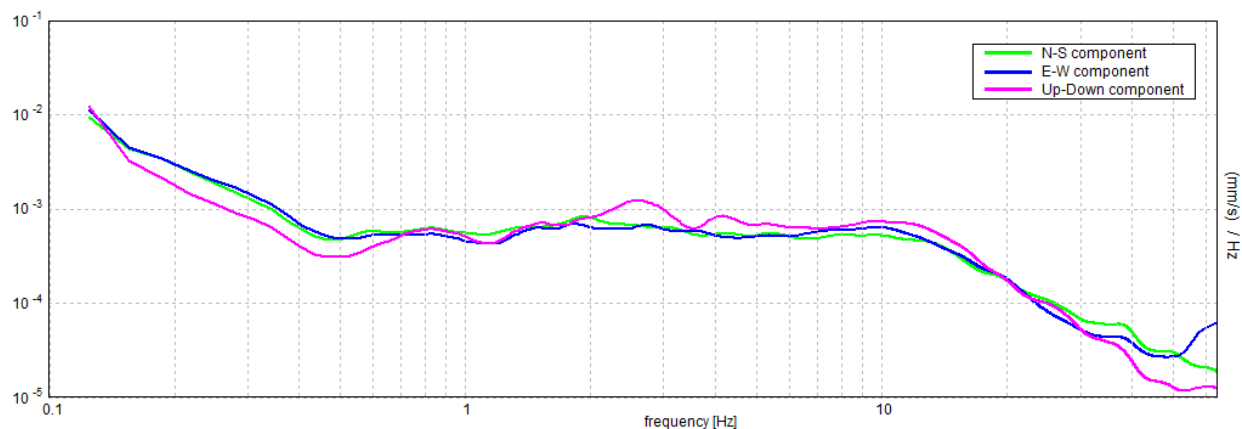


EXPERIMENTAL vs. SYNTHETIC H/V

Max. H/V at 63.97 ± 15.45 Hz (in the range 0.0 - 64.0 Hz).

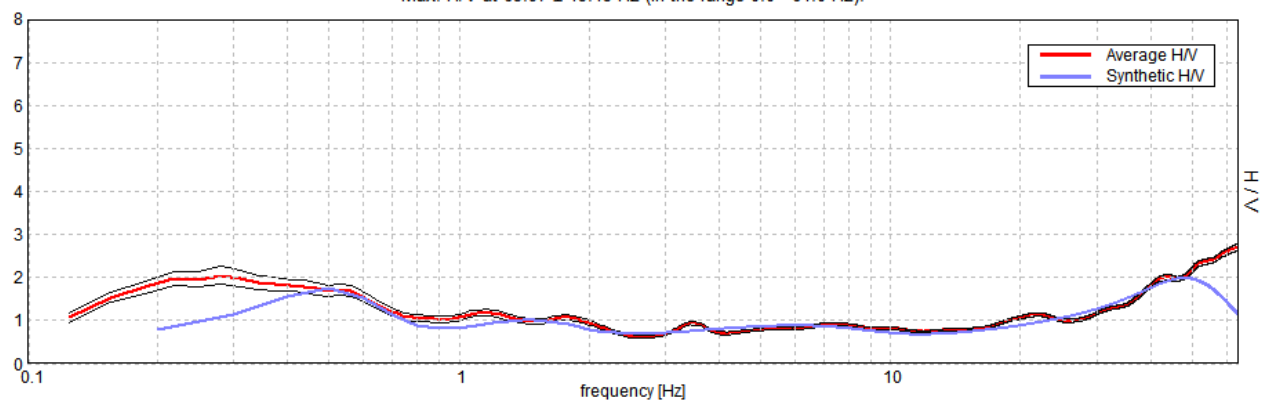

Depth at the bottom of the layer [m]	Thickness [m]	Vs [m/s]
0.80	0.80	160
3.80	3.00	310
12.80	9.00	340
42.80	30.00	450
92.80	50.00	500
342.80	250.00	690
inf.	inf.	1050

$V_s(0.0-30.0)=378\text{m/s}$

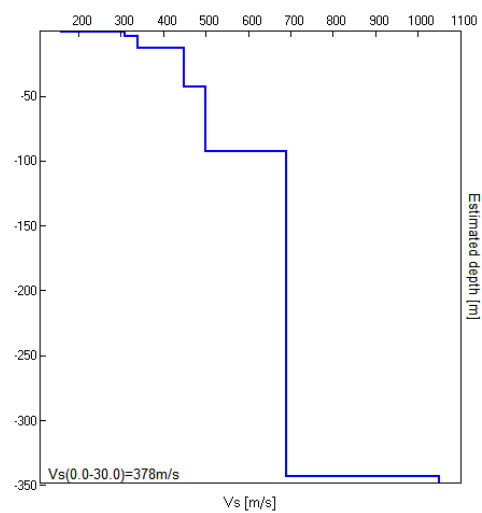



DOTT. GEOL. PAOLO TRENTI

DOTT. GEOL. MARIA CRISTINA VERRECCHIA

RILEVAZIONE TROMOGRAFICA – RAPPORTO DI PROVA 13.025-7.TR1

13025 RAVENNA, IPPODROMO TR1

Instrument: TEN-0006/01-07

Start recording: 10/10/13 13:17:19

End recording: 10/10/13 13:31:20

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

Trace length: 0h14'00".

Analyzed 90% trace (manual window selection)


Sampling rate: 128 Hz

Window size: 20 s


Smoothing type: Triangular window

Smoothing: 10%


RAPPORTO SPETTRALE ORIZZONTALE SU VERTICALE

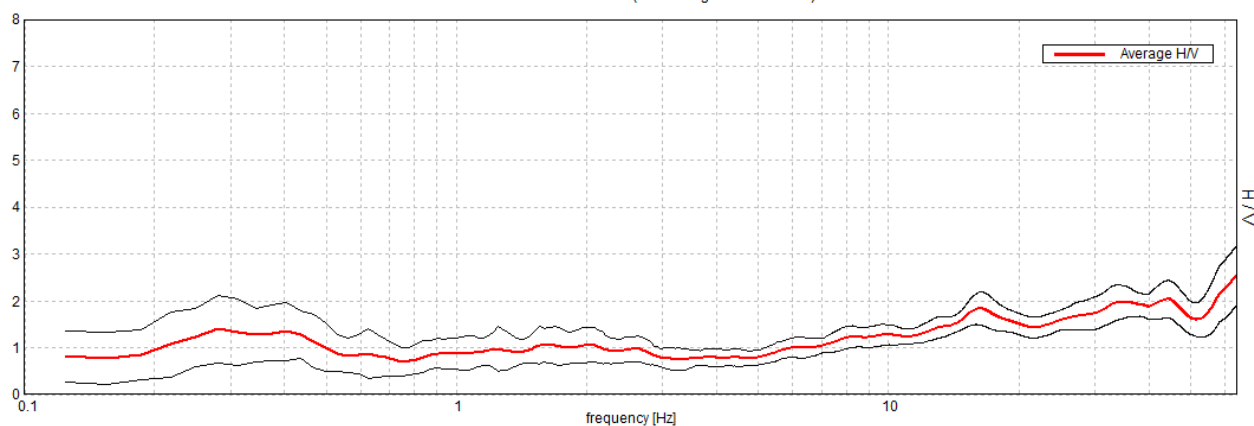Max. H/V at 63.97 ± 0.0 Hz (in the range 0.0 - 64.0 Hz).


SERIE TEMPORALE H/V

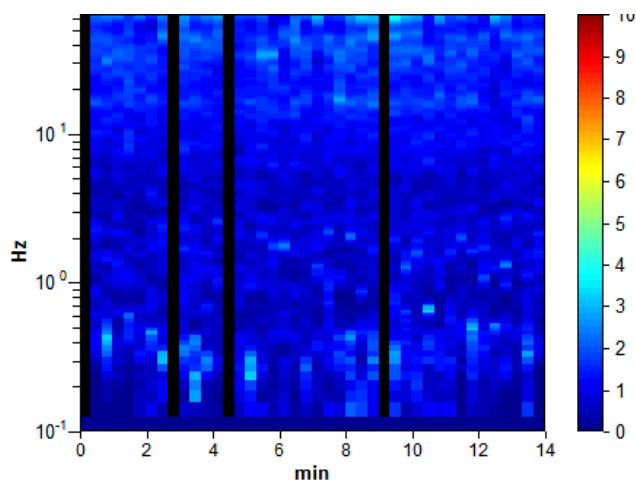

DIREZIONALITA' H/V

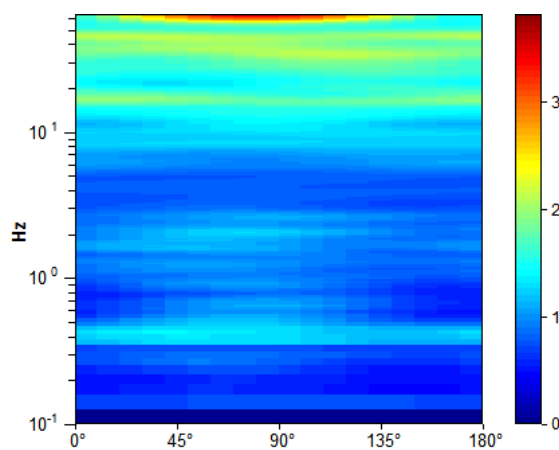


SPETTRI DELLE SINGOLE COMPONENTI

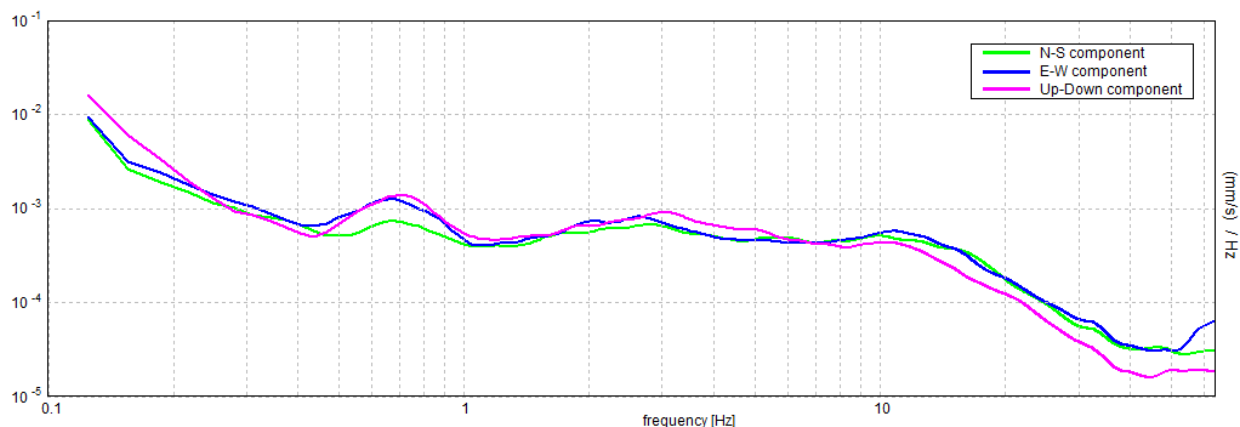


H/V SPERIMENTALE vs. H/V SINTETICO

Max. H/V at 63.97 ± 0.0 Hz (in the range 0.0 - 64.0 Hz).

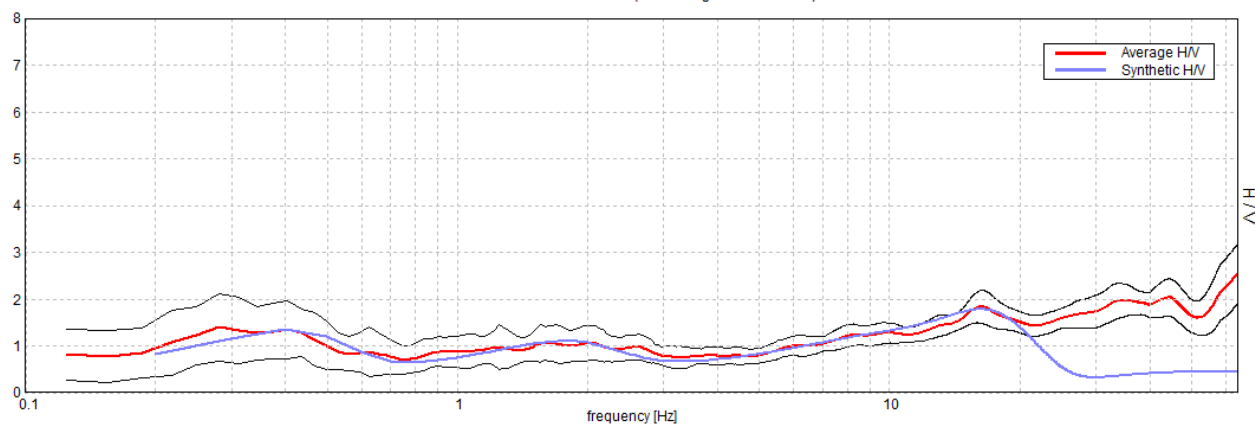

Profondità alla base dello strato [m]	Spessore [m]	Vs [m/s]
2.00	2.00	135
9.00	7.00	250
39.00	30.00	290
239.00	200.00	420
inf.	inf.	640

$V_s(0.0-30.0)=260\text{m/s}$

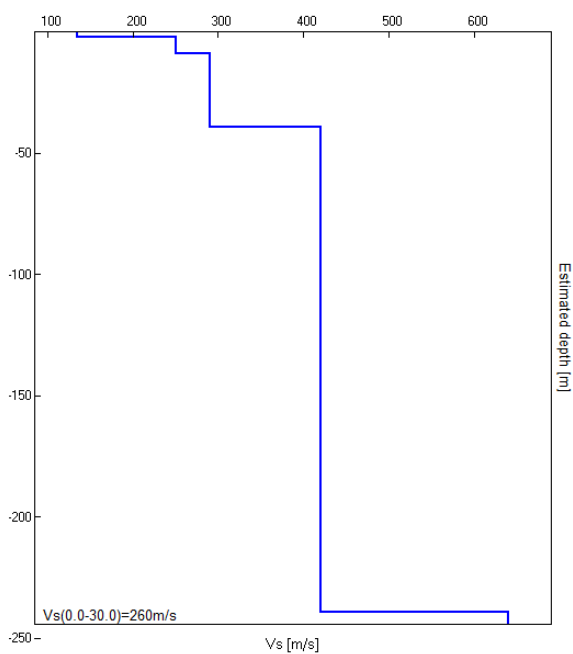

CLASSE, EXZUCCHERIFICIO 1

Instrument: TRZ-0117/01-11

Start recording: 20/01/16 09:55:37 End recording: 20/01/16 10:15:37

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available




Trace length: 0h20'00". Analyzed 97% trace (manual window selection)

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window

Smoothing: 10%

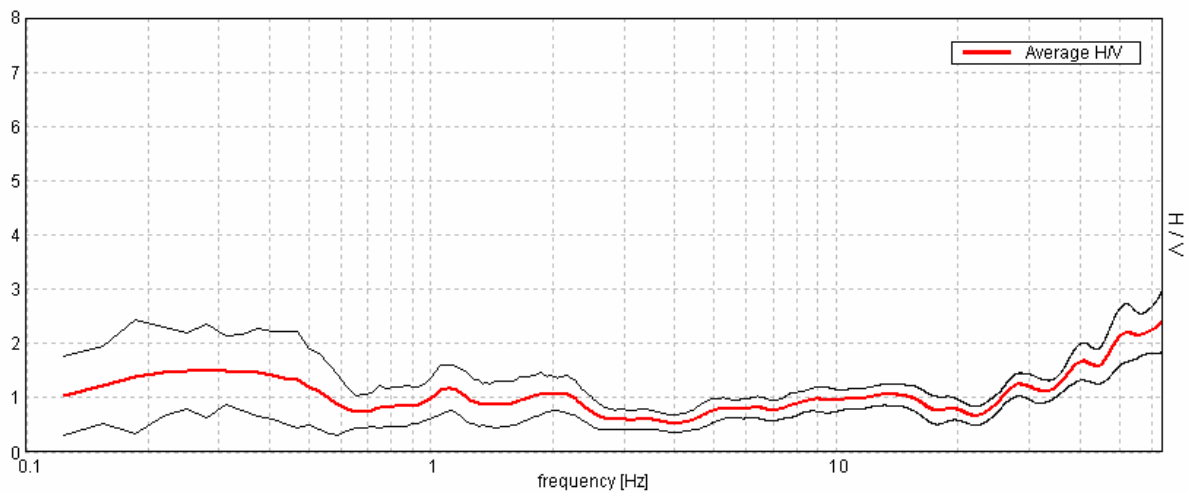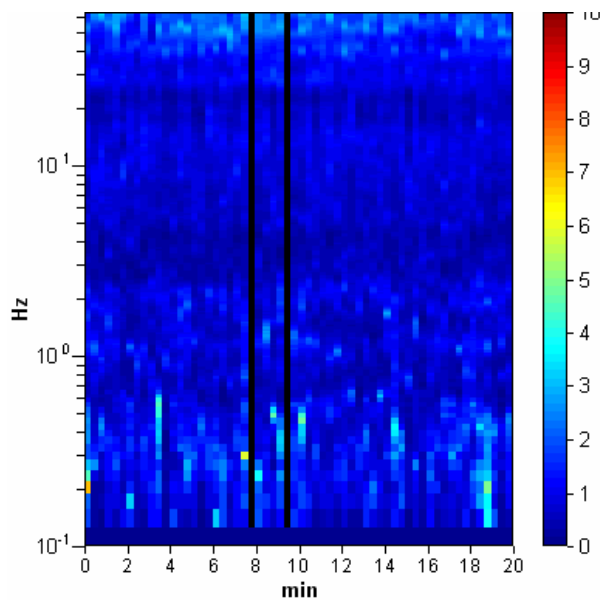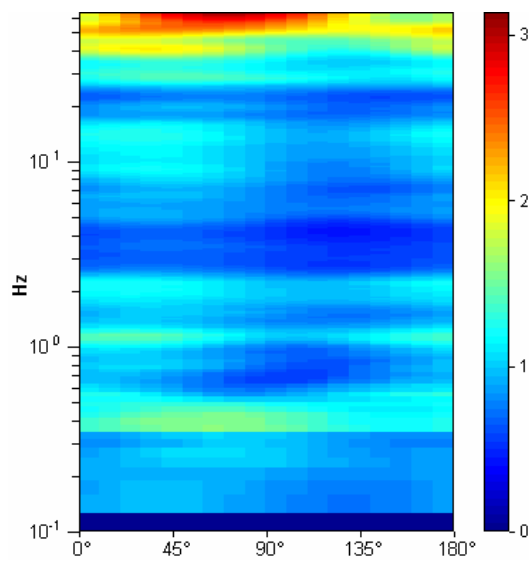
HORIZONTAL TO VERTICAL SPECTRAL RATIOMax. H/V at 63.97 ± 3.14 Hz. (In the range 0.0 - 64.0 Hz).**H/V TIME HISTORY****DIRECTIONAL H/V**

SINGLE COMPONENT SPECTRA

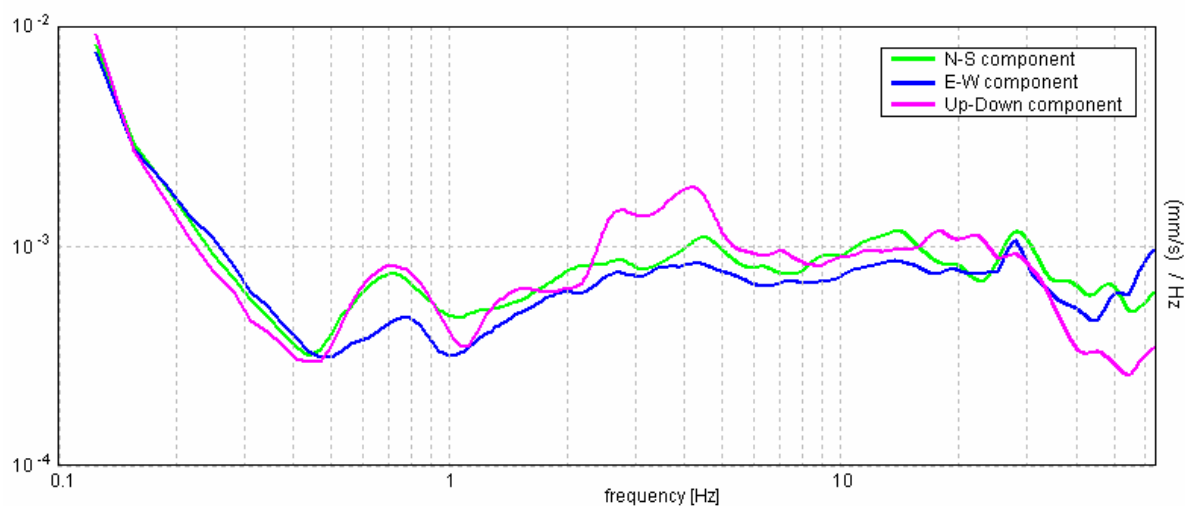


EXPERIMENTAL vs. SYNTHETIC H/V

Max. H/V at 63.97 ± 3.03 Hz. (In the range 0.0 - 64.0 Hz).

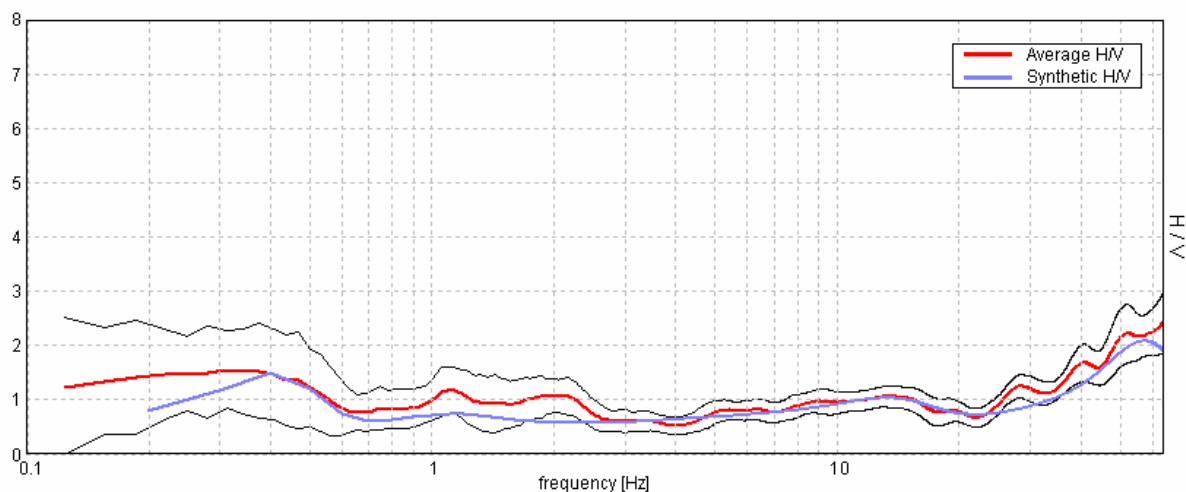

Depth at the bottom of the layer [m]	Thickness [m]	Vs [m/s]	Poisson ratio
0.30	0.30	70	0.35
2.80	2.50	150	0.35
6.80	4.00	230	0.35
10.80	4.00	200	0.35
24.80	14.00	220	0.35
27.80	3.00	150	0.35
30.80	3.00	320	0.35
35.80	5.00	160	0.35
45.80	10.00	500	0.35
85.80	40.00	260	0.35
115.80	30.00	550	0.35
185.80	70.00	280	0.35
inf.	inf.	620	0.35

Vs(0.0-30.0)=202m/s
Vs(3.0-33.0)=209m/s

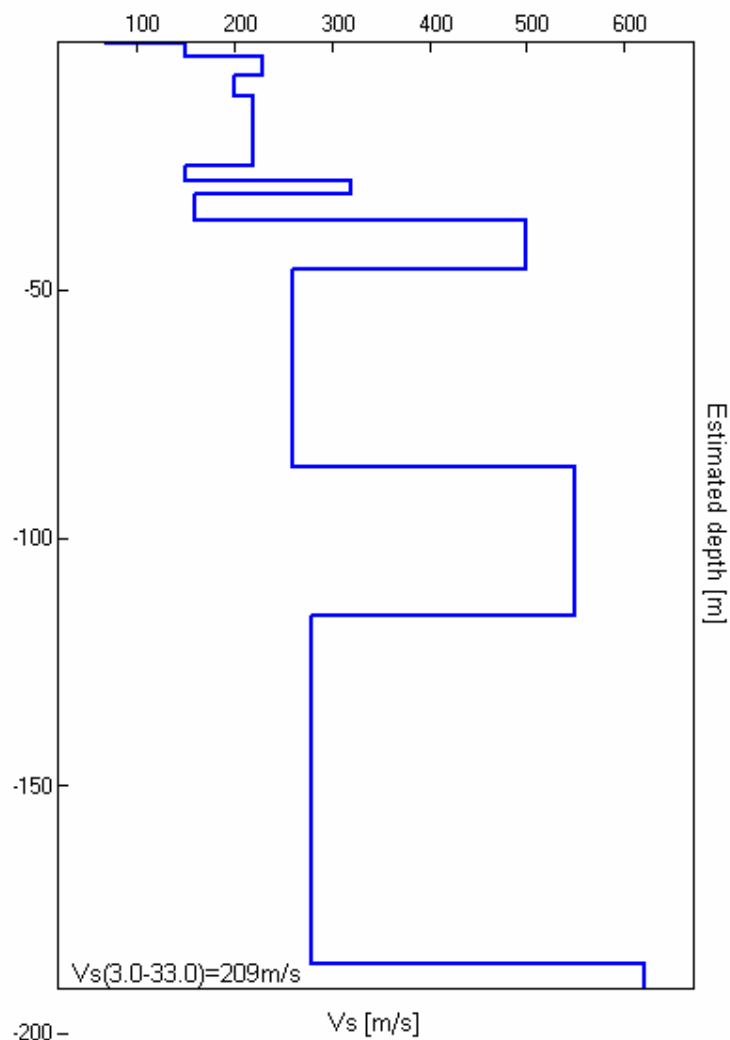

Max. H/V at 63.97 ± 3.14 Hz (in the range 0.0 - 64.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$63.97 > 0.50$	OK	
$n_c(f_0) > 200$	$74203.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 1026 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]

Exists f^* in $[f_0/4, f_0]$ $A_{H/V}(f^*) < A_0 / 2$	35.031 Hz	OK	
Exists f^* in $[f_0, 4f_0]$ $A_{H/V}(f^*) < A_0 / 2$			NO
$A_0 > 2$	$2.41 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.02431 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$1.55518 < 3.19844$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.2815 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$					
Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

Committente: MARTINI ALIMENTARI S. P. A.

Lavoro: Ristrutturazione e ampliamento di servizi igienici e spogliatoi

Località: Via Bevano, Castiglione di Ravenna

Instrument: TRZ-0112/01-10

Start recording: 10/07/12 09:28:31 End recording: 10/07/12 09:48:32

Channel labels: NORTH SOUTH, EAST WEST ; UP DOWN

GPS data not available

Trace length: 0h20'00". Analysis performed on the entire trace.

Sampling rate: 128 Hz


Window size: 20 s

Smoothing type: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.5 ± 0.3 Hz. (In the range 0.0 - 2.0 Hz).

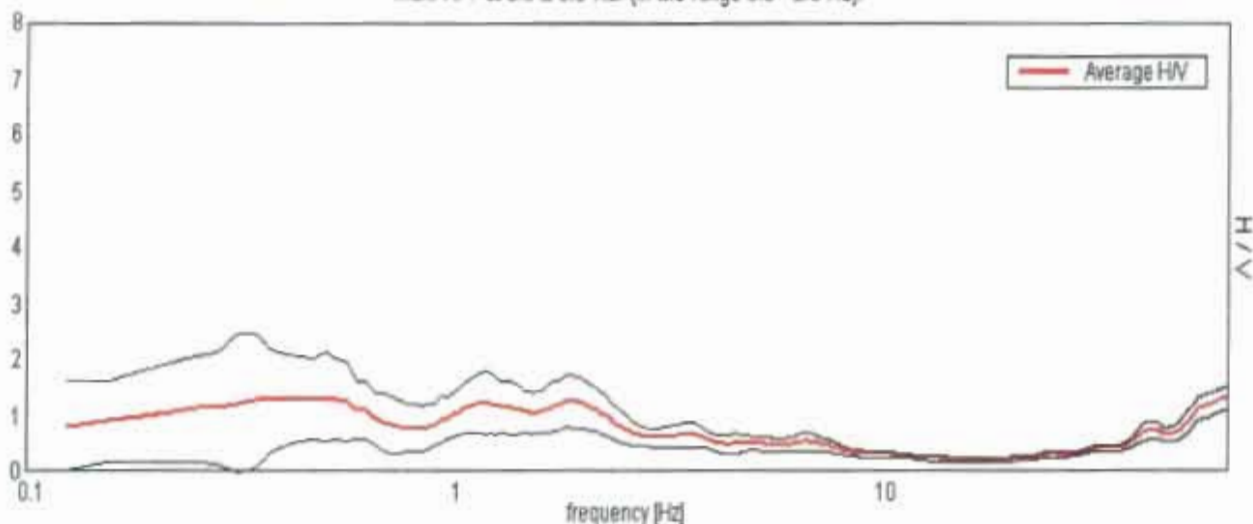

H/V TIME HISTORY

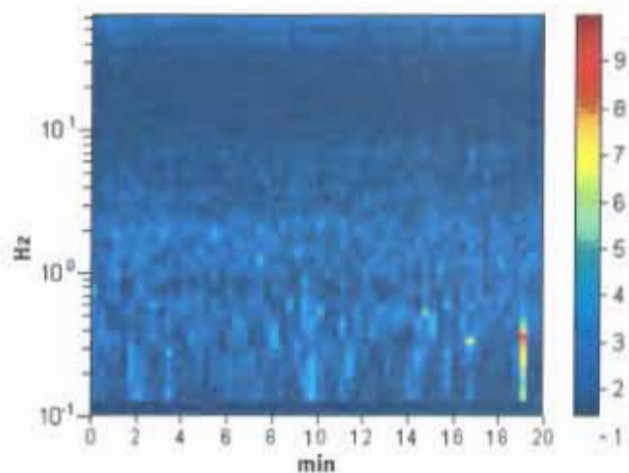


SINGLE COMPONENT SPECTRA

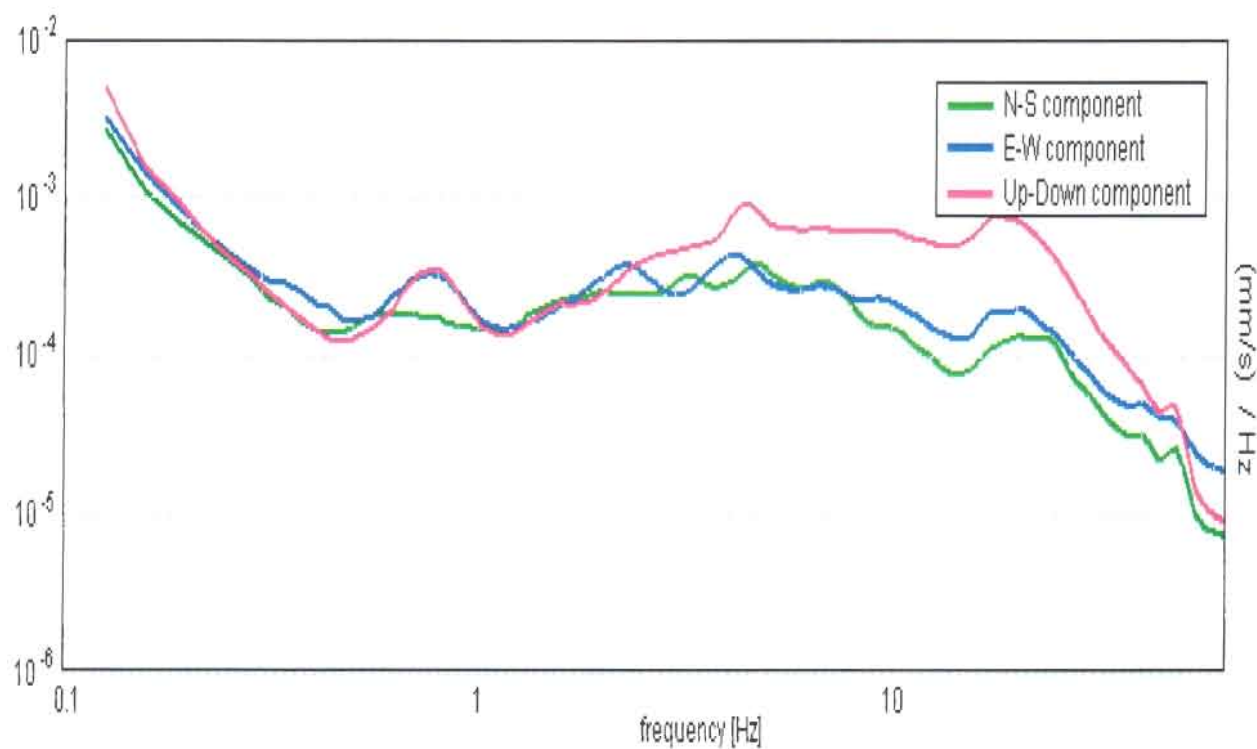


EXPERIMENTAL vs. SYNTHETIC H/V

Max. H/V at 0.5 ± 0.3 Hz. (In the range 0.0 - 2.0 Hz).

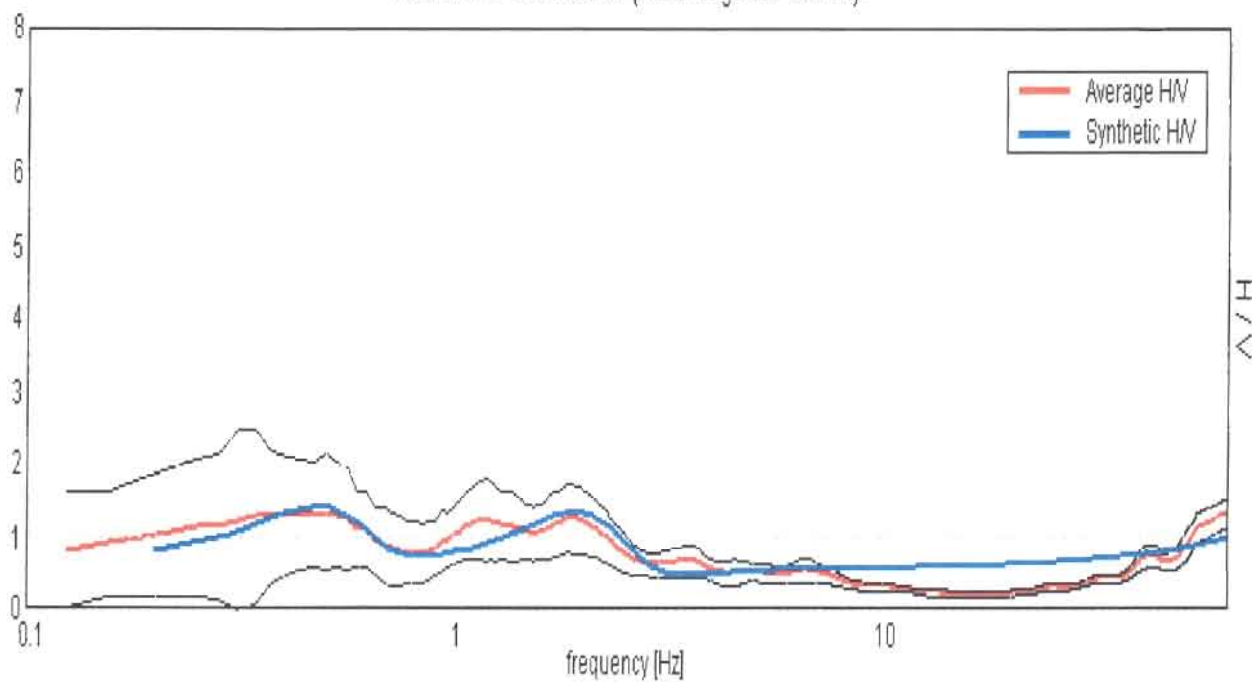

Depth at the bottom of the layer [m]	Thickness [m]	Vs [m/s]	Poisson ratio
0.20	0.20	80	0.35
17.20	17.00	140	0.30
137.20	120.00	275	0.30
inf.	inf.	500	0.27

$V_s(0.8-30.8)=180\text{m/s}$

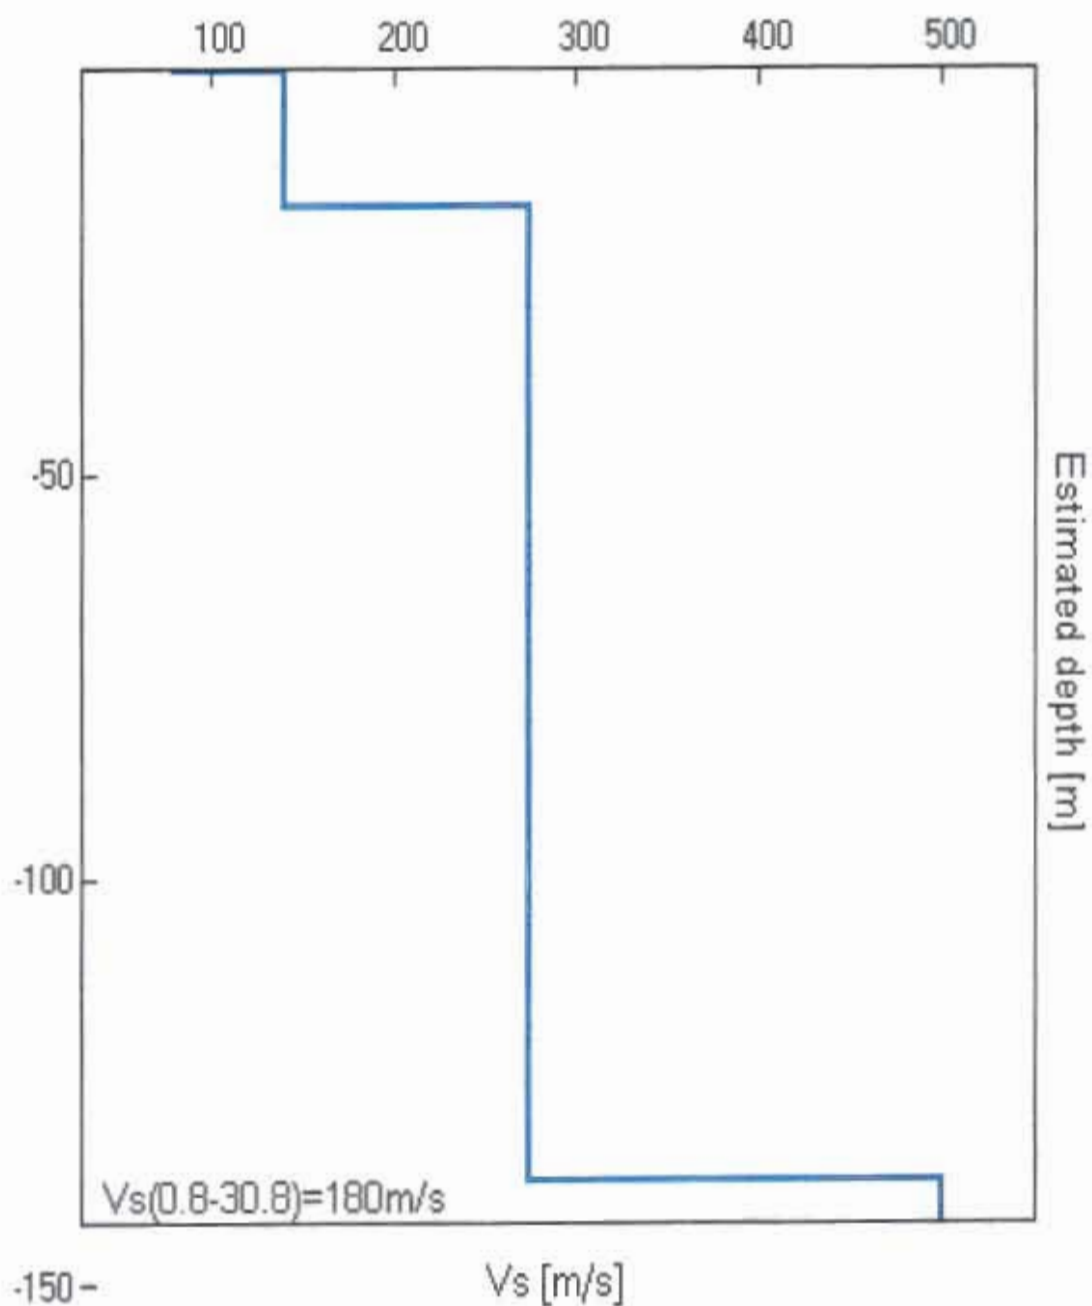

(According to the SESAME, 2005 guidelines)

Max. H/V at 0.5 ± 0.3 Hz (in the range 0.0 - 2.0 Hz).

Criteria for a reliable H/V curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$1.60 > 0.50$	OK	
$n_c(f_0) > 200$	$600.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 25 times	OK	

Criteria for a clear H/V peak

[At least 5 out of 6 should be fulfilled]


Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	3.754 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$2.32 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.03355 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.06686 < 0.075$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.3958 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


Allegato 6 – Sismogrammi – MASW2

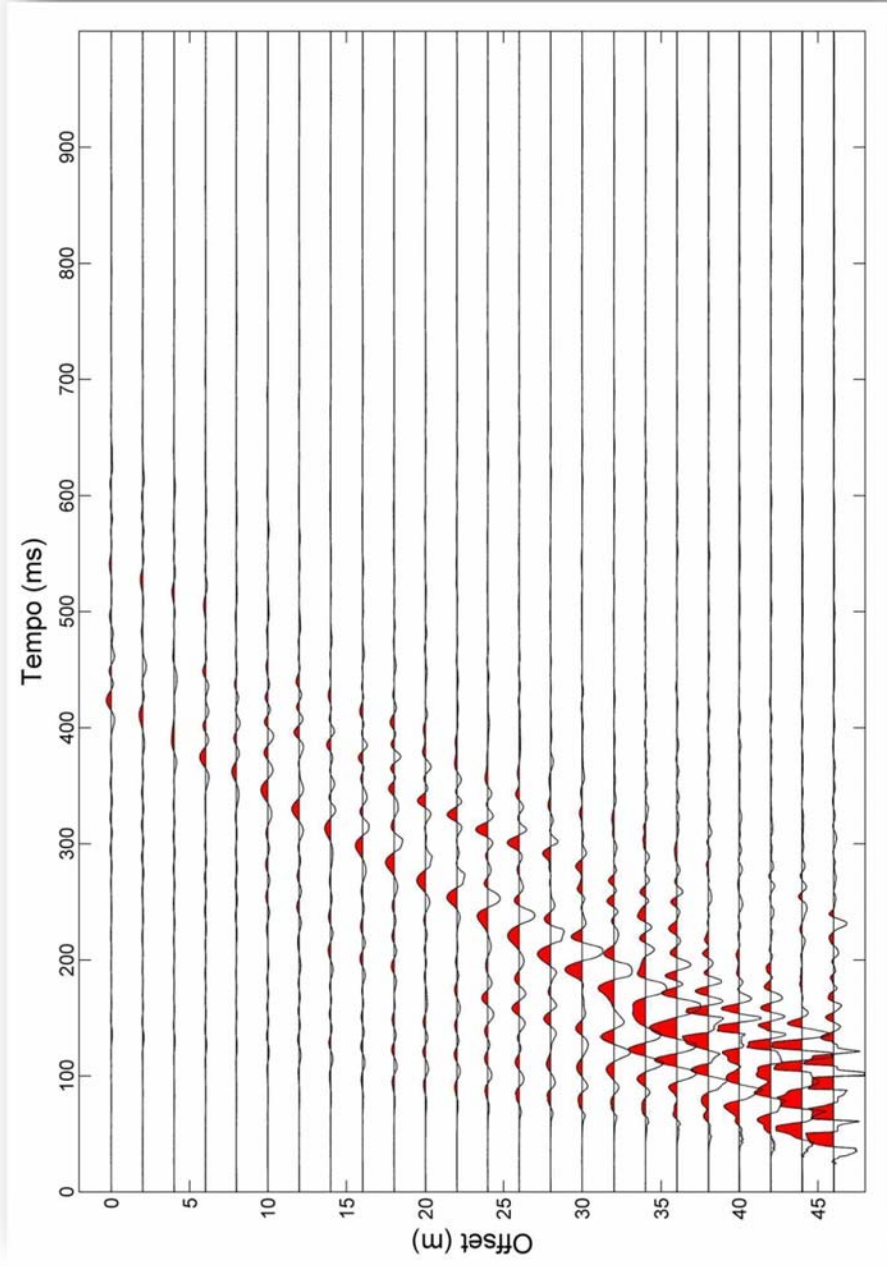

MASW5A


Sismogrammi acquisiti dai 24 geofoni durante l'indagine. La sorgente è posta ad una distanza di 8 m dal geofono 24. La spaziatura tra i geofoni è di 2 m.

Allegato 7 – Spettro di dispersione – MASW2

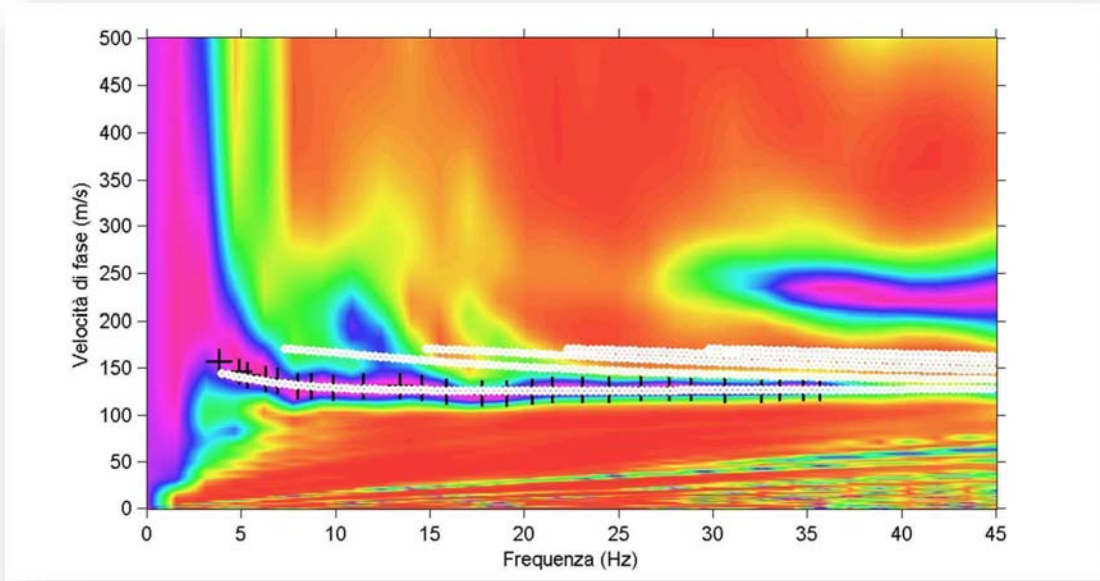


in alto: Spettro frequenza-velocità di fase dei dati acquisiti durante l'indagine. Sovrimposti allo spettro sono il picking del modo fondamentale (crocette nere) e le curve di dispersione sintetiche del modo fondamentale e di alcuni modi superiori (linee bianche).
in basso: Curva H/V (A) e andamento delle componenti velocimetriche (N-S, E-W, Up-Down) (B)


A

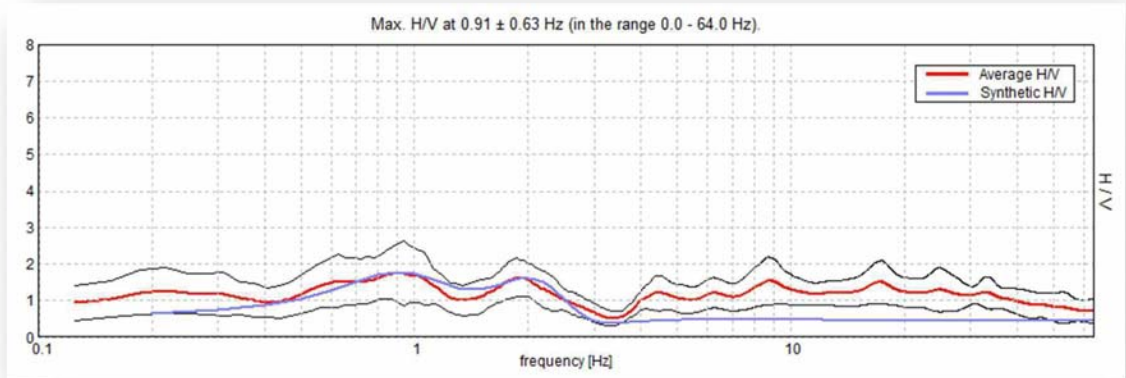

B

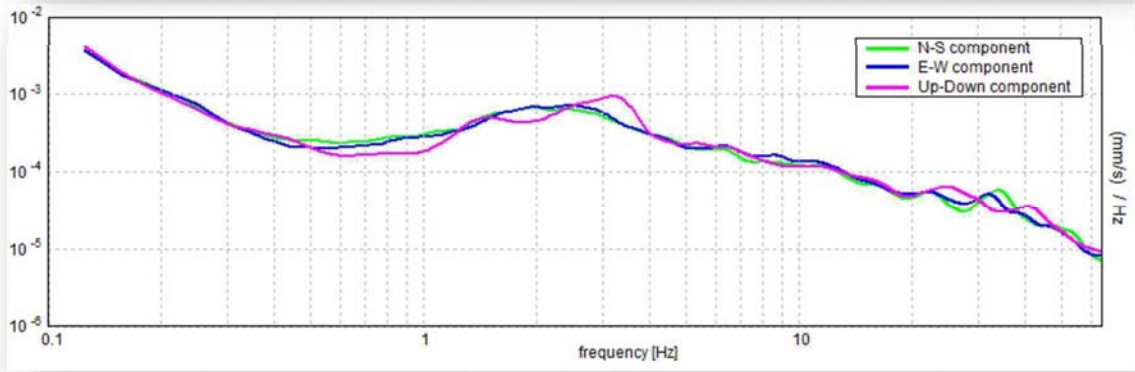

Allegato 8 – Velocità onde S in funzione della profondità – MASW2

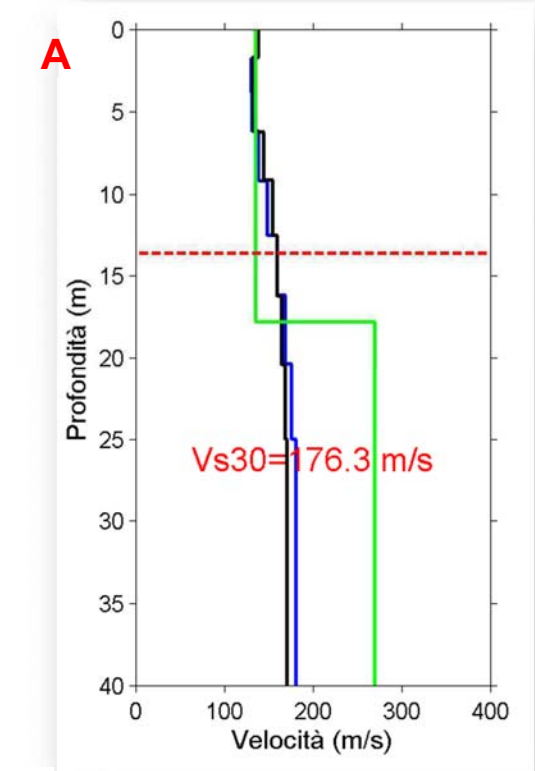


B

Spessore (m)	Vs WaveEq (m/s)	Spessore (m)	Vs SWAMI (m/s)	Spessore (m)	Vs HVSR (m/s)
1.7	138.4	1.7	137.1	17.8	135.0
2.1	132.2	2.1	130.8	62.0	260.0
2.5	133.6	2.4	131.1	inf	398.0
2.9	144.3	3.0	138.5		
3.3	154.2	3.3	148.5		
3.7	159.7	3.7	159.3		
4.2	164.7	4.2	169.0		
4.6	168.3	4.6	176.2		
15.0	170.4	15.0	181.0		
inf	170.4	inf	182.0		


(B) La prima, terza e quinta colonna riportano gli spessori degli strati dei modelli ottenuti dall'indagine MASW (colonne 1 e 3) e dall'indagine HVSR (colonna 5). La seconda e la quarta colonna contengono le velocità stimate attraverso la tecnica MASW utilizzando i programmi WaveEq e SWAMI; la sesta colonna riporta le velocità stimate mediante inversione della curva H/V. Sono evidenziati in azzurro i valori di velocità e i relativi spessori utilizzati per il calcolo del parametro V_{s30} ;

(C) andamento del parametro V_{s30} in funzione della variazione della profondità del piano fondale della struttura in progetto. Le linee in tratteggio di colore verde indicano i limiti 180 m/s e 360 m/s rispetto alla tabella 1 (crf. §2).

(A) Andamento della velocità delle onde S in funzione della profondità. Vengono riportati in nero i valori ottenuti con il programma WaveEq (Geometrics) e in blu i valori derivati con il programma SWAMI (Georgia Institute of Technology), relativamente all'indagine MASW; in verde viene indicato l'andamento ottenuto mediante inversione della curva H/V, vincolata nella parte superficiale attraverso i valori ottenuti dall'indagine MASW. La linea tratteggiata in rosso rappresenta la profondità stimata per la frequenza più bassa scelta durante l'operazione di *picking*. A profondità maggiori l'andamento delle velocità delle onde S è stimato mediante *fit* della curva H/V.

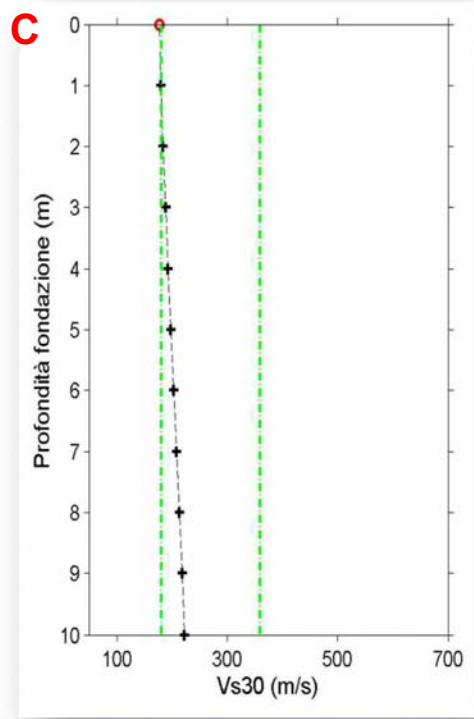


Allegato 2 – Sismogrammi – MASW1

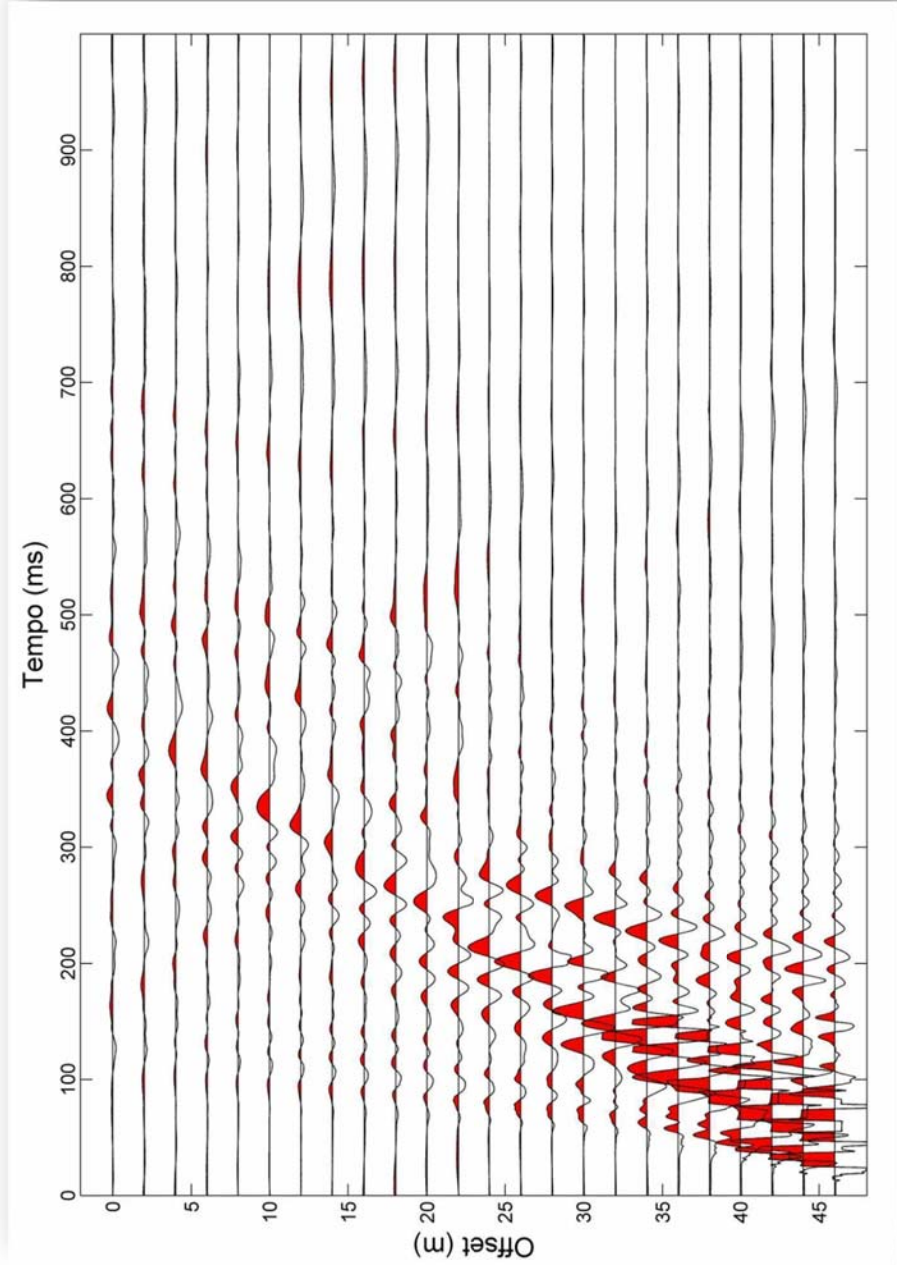

Sismogrammi acquisiti dai 24 geofoni durante l'indagine. La sorgente è posta ad una distanza di 8 m dal geofono 24. La spaziatura tra i geofoni è di 2 m.


MASW4A

Allegato 3 – Spettro di dispersione – MASW1

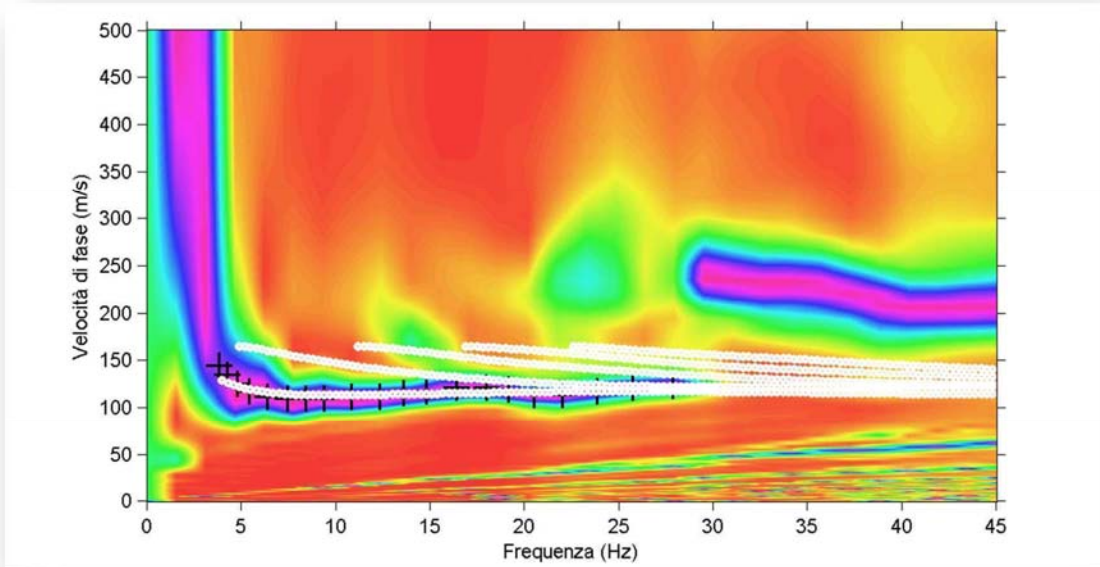


in alto: Spettro frequenza-velocità di fase dei dati acquisiti durante l'indagine. Sovrimposti allo spettro sono il picking del modo fondamentale (crocette nere) e le curve di dispersione sintetiche del modo fondamentale e di alcuni modi superiori (HVSRI15A, pallini bianchi).
in basso: Curva H/V (A) e andamento delle tre componenti velocimetriche (N-S, E-W, Up-Down) (B)


A

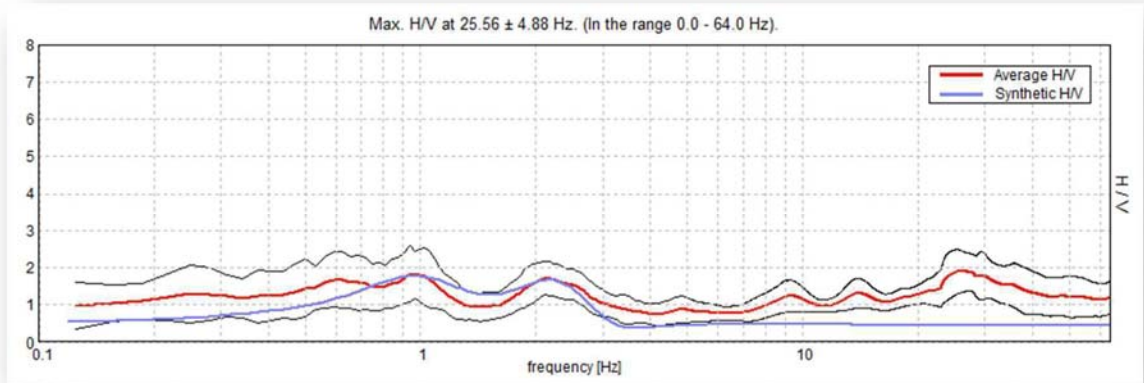

B

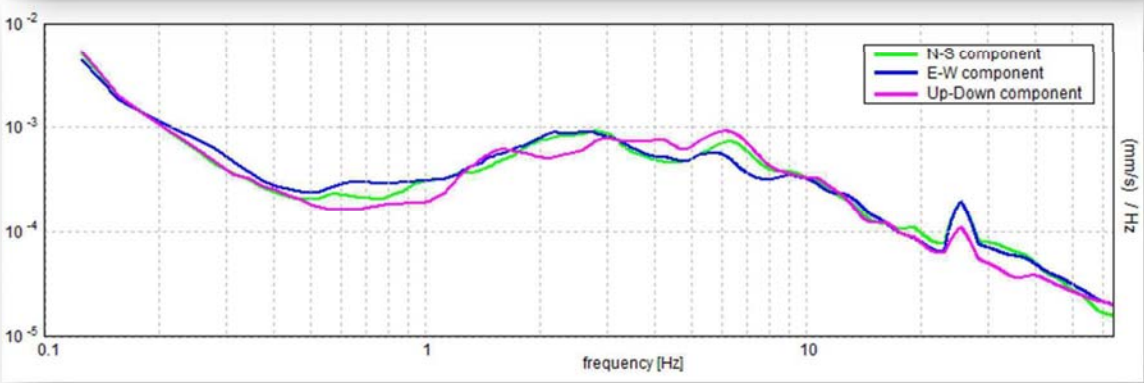

Allegato 4 – Velocità onde S in funzione della profondità – MASW1

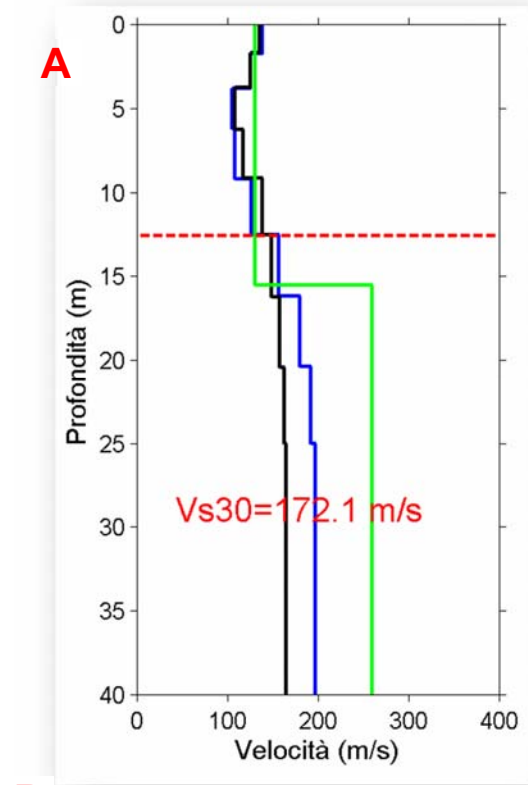


B

Spessore (m)	Vs WaveEq (m/s)	Spessore (m)	Vs SWAMI (m/s)	Spessore (m)	Vs HVSR (m/s)
1.7	135.3	1.7	138.5	15.5	130.0
2.1	125.2	2.1	125.7	57.0	260.0
2.5	108.0	2.4	104.9	inf	385.0
2.9	117.7	3.0	108.0		
3.3	138.2	3.3	126.3		
3.7	148.7	3.7	156.4		
4.2	157.3	4.2	179.6		
4.6	162.5	4.6	191.8		
15.0	165.0	15.0	196.9		
inf	165.0	inf	197.1		

(B) La prima, terza e quinta colonna riportano gli spessori degli strati dei modelli ottenuti dall'indagine MASW (colonne 1 e 3) e dall'indagine HVSR (colonna 5). La seconda e la quarta colonna contengono le velocità stimate attraverso la tecnica MASW utilizzando i programmi WaveEq e SWAMI; la sesta colonna riporta le velocità stimate mediante inversione della curva H/V. Sono evidenziati in azzurro i valori di velocità e i relativi spessori utilizzati per il calcolo del parametro V_{s30} ; **(C)** andamento del parametro V_{s30} in funzione della variazione della profondità del piano fondale della struttura in progetto. Le linee in tratteggio di colore verde indicano i limiti 180 m/s e 360 m/s rispetto alla tabella 1 (crf. §2).

(A) Andamento della velocità delle onde S in funzione della profondità. Vengono riportati in nero i valori ottenuti con il programma WaveEq (Geometrics) e in blu i valori derivati con il programma SWAMI (Georgia Institute of Technology), relativamente all'indagine MASW; in verde viene indicato l'andamento ottenuto mediante inversione della curva H/V, vincolata nella parte superficiale attraverso i valori ottenuti dall'indagine MASW. La linea tratteggiata in rosso rappresenta la profondità stimata per la frequenza più bassa scelta durante l'operazione di *picking*. A profondità maggiori l'andamento delle velocità delle onde S è stimato mediante *fit* della curva H/V.

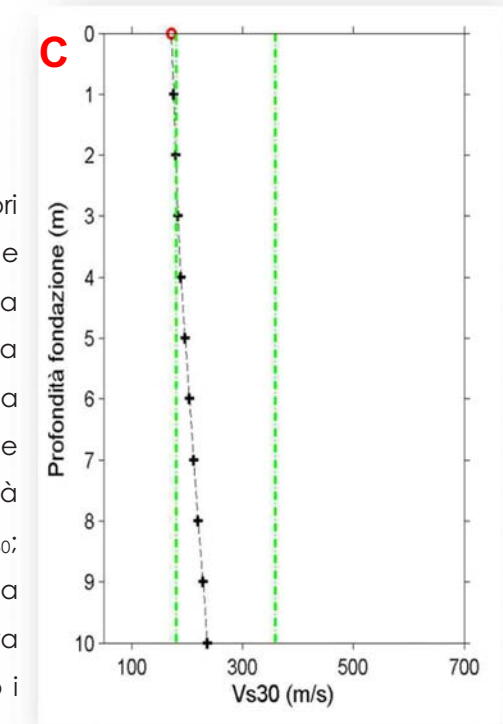

Allegato 5 – Documentazione fotografica – MASW2



Foto 1 – Ubicazione misura HVSR

RILEVAZIONE TROMOGRAFICA – RAPPORTO DI PROVA 13.025-6.TR1**13025 RAVENNA, CIMITERO TR1**

Strumento: TEN-0006/01-07

Inizio registrazione: 27/09/13 16:34:11

Fine registrazione: 27/09/13 17:04:12

Nomi canali: NORTH SOUTH; EAST WEST ; UP DOWN

Durata registrazione: 0h30'00".




Analizzato 89% tracciato (selezione manuale)

Freq. campionamento: 128 Hz


Lunghezza finestre: 20 s

Tipo di lisciamento: Triangular window

Lisciamento: 10%

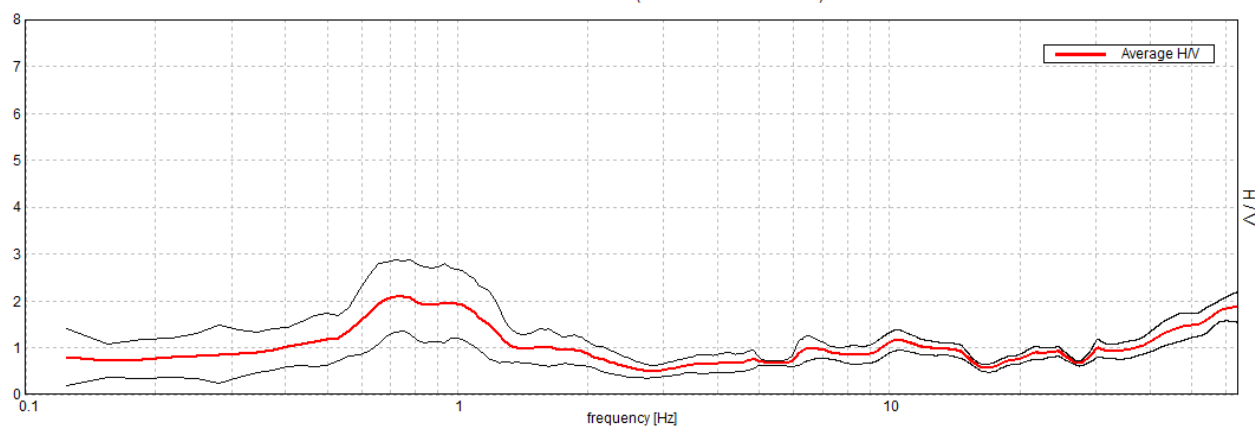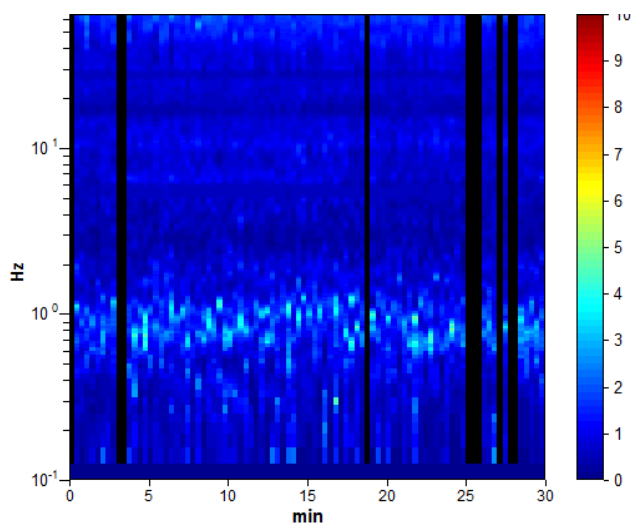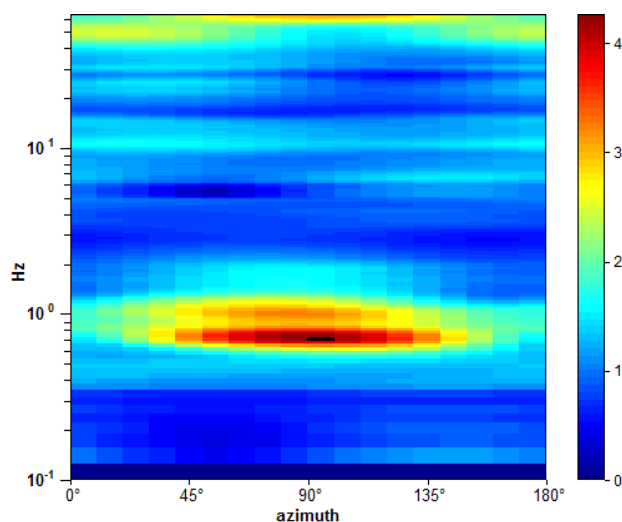
RAPPORTO SPETTRALE ORIZZONTALE SU VERTICALEPicco H/V a 0.75 ± 12.22 Hz (nell'intervallo 0.0 - 64.0 Hz).**SERIE TEMPORALE H/V****DIREZIONALITA' H/V**

SPETTRI DELLE SINGOLE COMPONENTI

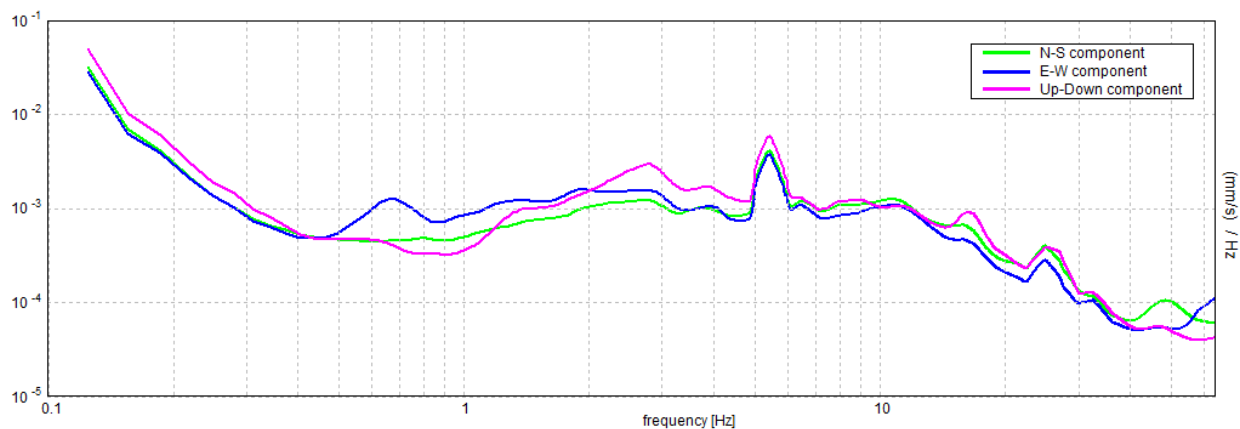


H/V SPERIMENTALE vs. H/V SINTETICO

Picco H/V a 0.75 ± 12.22 Hz (nell'intervallo 0.0 - 64.0 Hz).

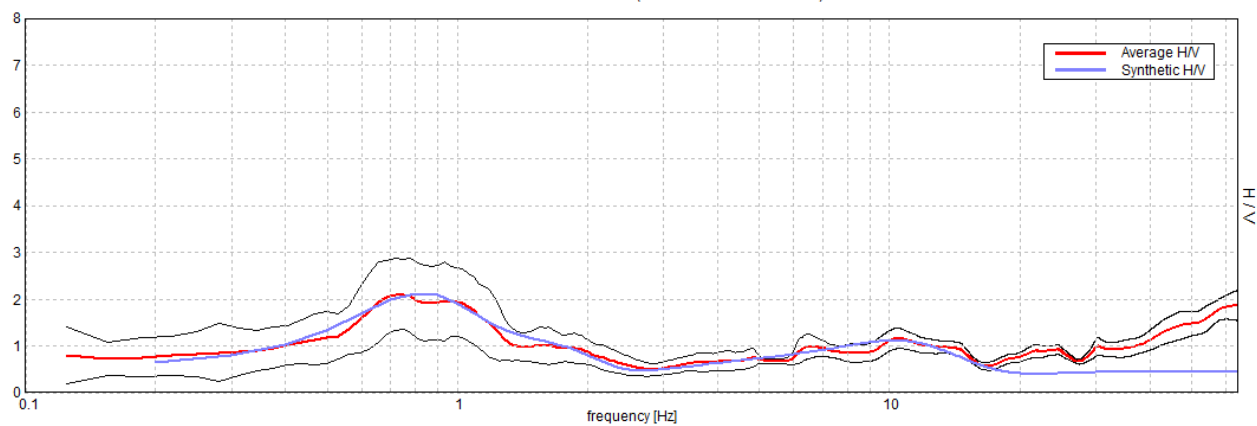

Profondità alla base dello strato [m]	Spessore [m]	Vs [m/s]
4.00	4.00	184
44.00	40.00	270
144.00	100.00	450
inf.	inf.	620

$V_s(0.0-30.0)=254\text{m/s}$

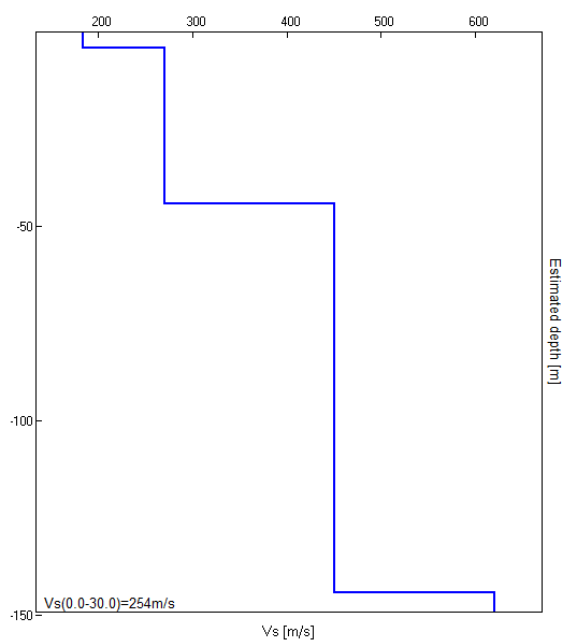

CASALBORSETTI - VIA DELLE ROSE 18-20, BROGNARA TR 1

Start recording: 18/11/09 16:09:18 End recording: 18/11/09 16:29:19

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available

Trace length: 0h20'00". Analyzed 72% trace (manual window selection)

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. HV at 0.31 ± 0.44 Hz. (in the range 0.0 - 20.0 Hz)

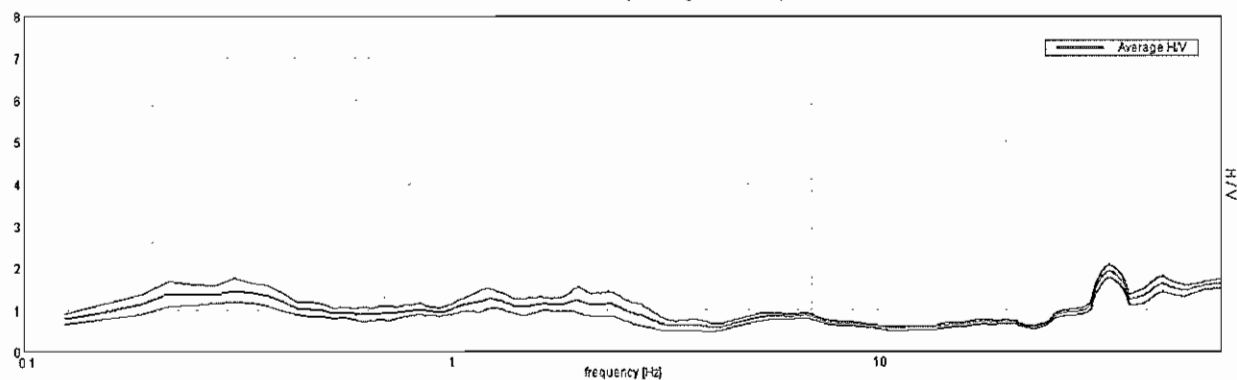


H/V TIME HISTORY

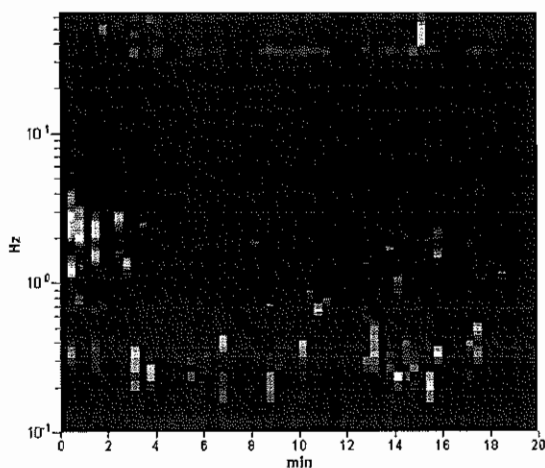


DIRECTIONAL H/V

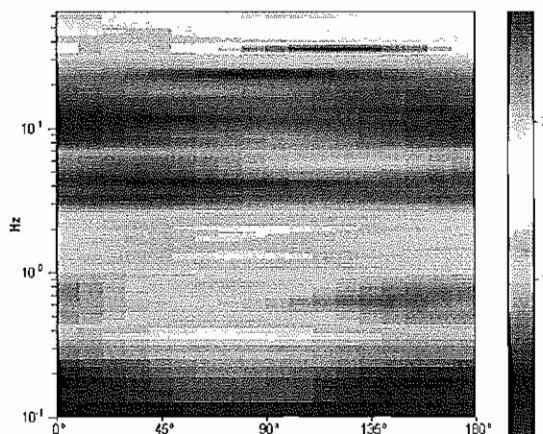

SINGLE COMPONENT SPECTRA

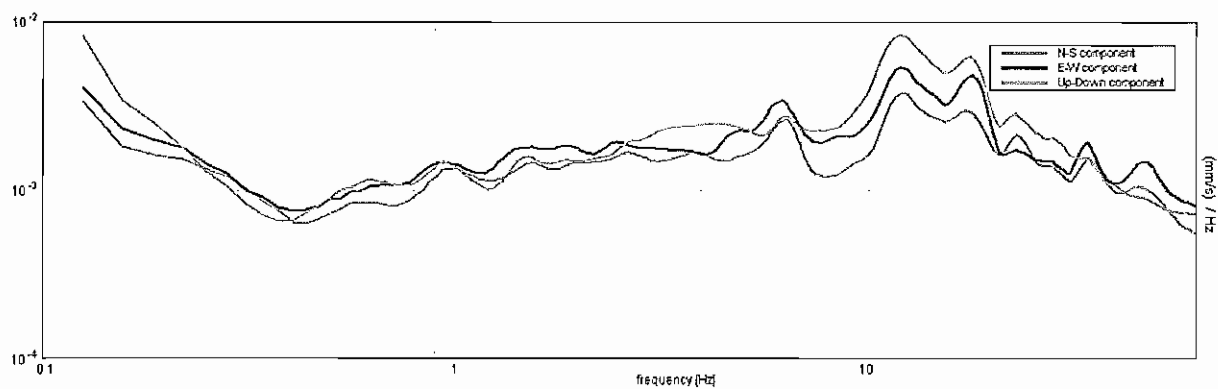

EXPERIMENTAL VS. SYNTHETIC H/V

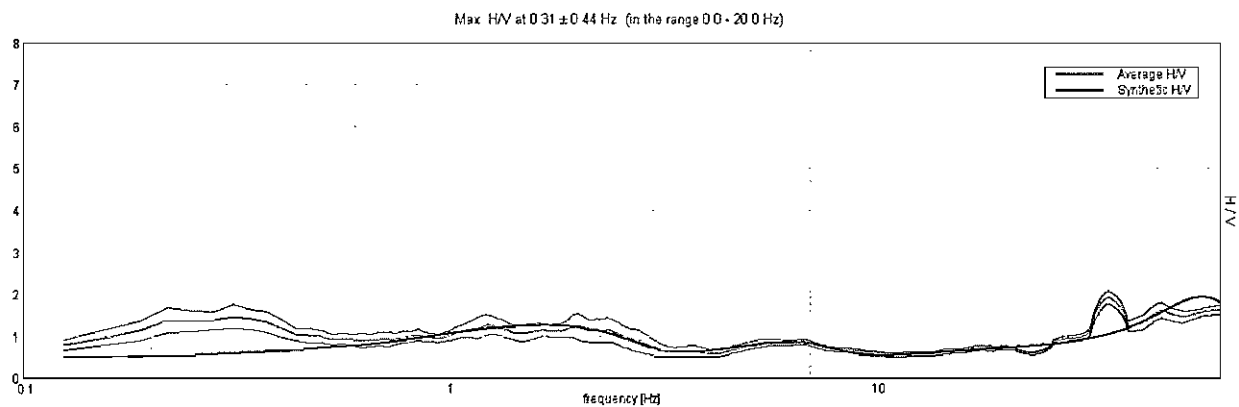

Depth at the bottom of the layer


[m]

Thickness [m]

Vs [m/s]

0.20	0.20	48
4.60	4.40	100
8.60	4.00	180
12.60	4.00	110
15.60	3.00	150
50.60	35.00	240
inf.	inf.	290

Vs(0.0-30.0)=161m/s

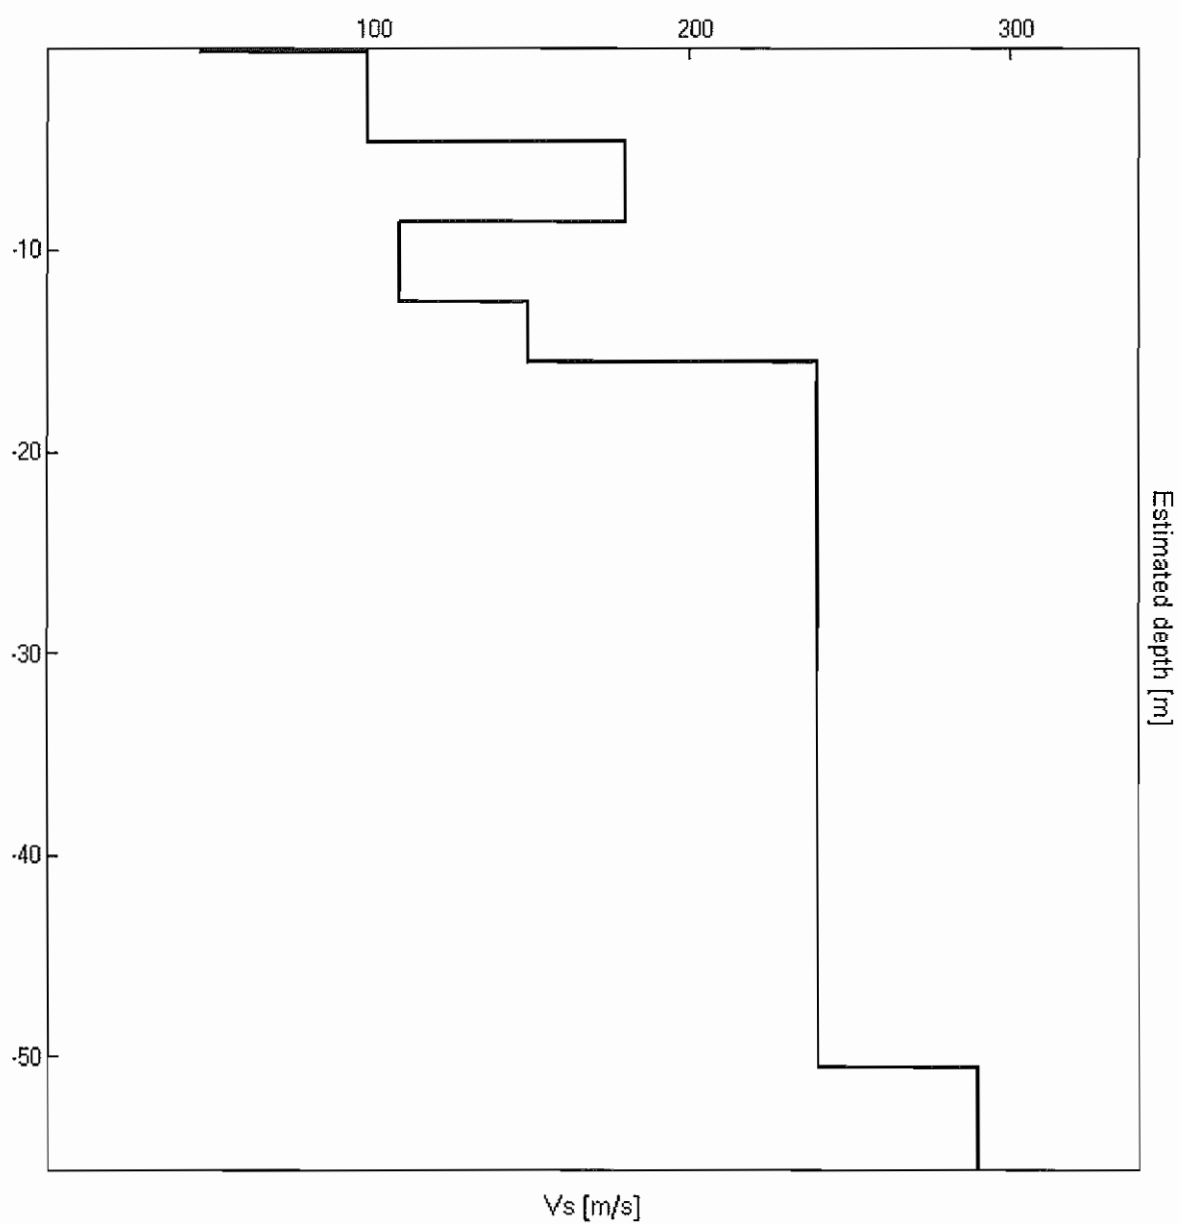

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 0.31 ± 0.44 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.31 > 0.50$		NO
$n_c(f_0) > 200$	$268.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 16 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	0.094 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$1.47 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.6878 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.21494 < 0.0625$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.1401 < 2.5$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 - 0.5	0.5 - 1.0	1.0 - 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


HVSR18A

RAVENNA – n. 4


Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h20'00". Analysis performed on the entire trace.
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO
Max. H/V at 0.47 ± 0.01 Hz. (in the range 0.0 - 30.0 Hz).

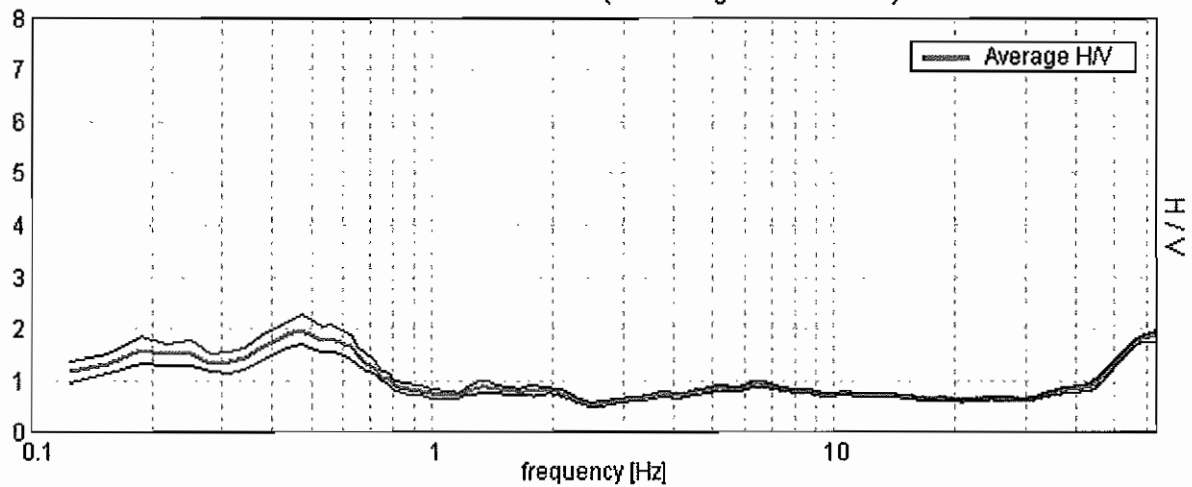


H/V TIME HISTORY

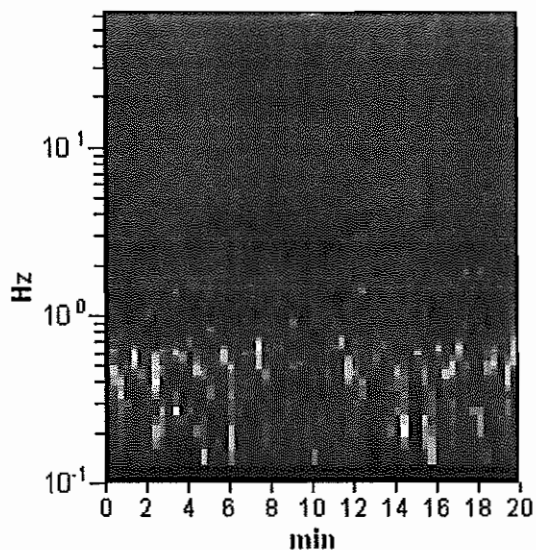

DIRECTIONAL H/V

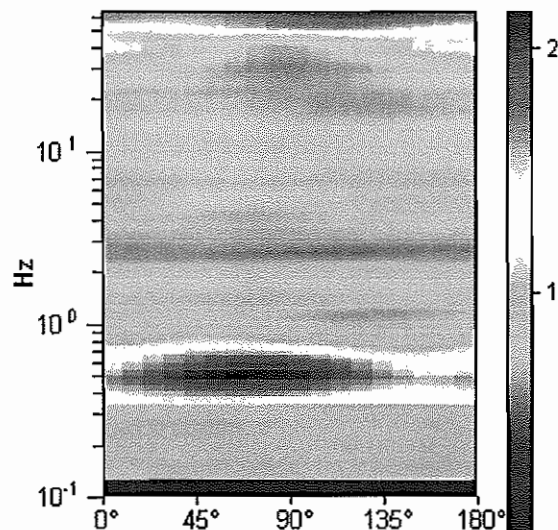


SINGLE COMPONENT SPECTRA

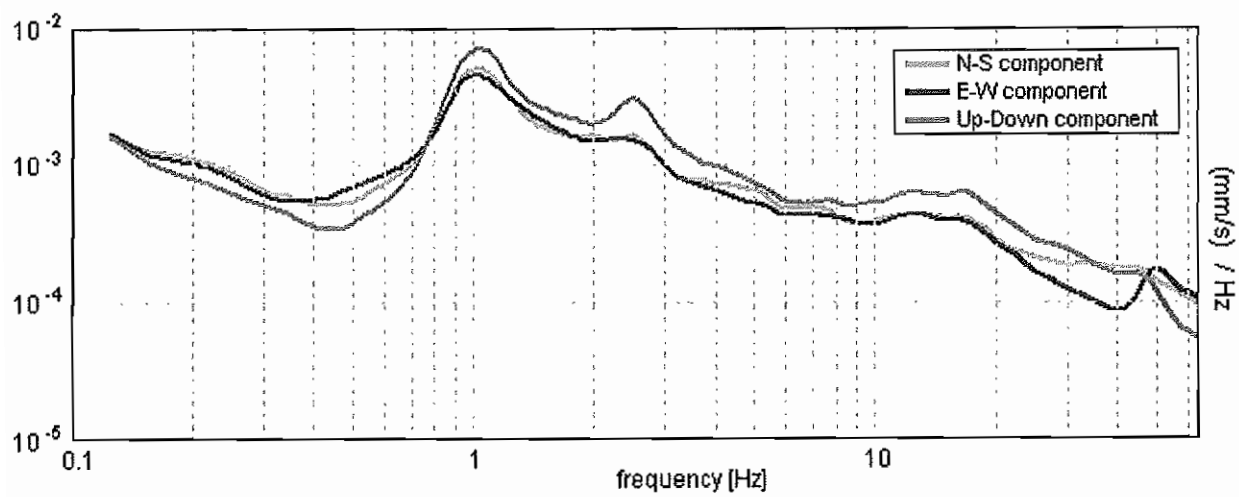

EXPERIMENTAL VS. SYNTHETIC H/V

Max. H/V at 0.47 ± 0.01 Hz. (In the range 0.0 - 30.0 Hz).

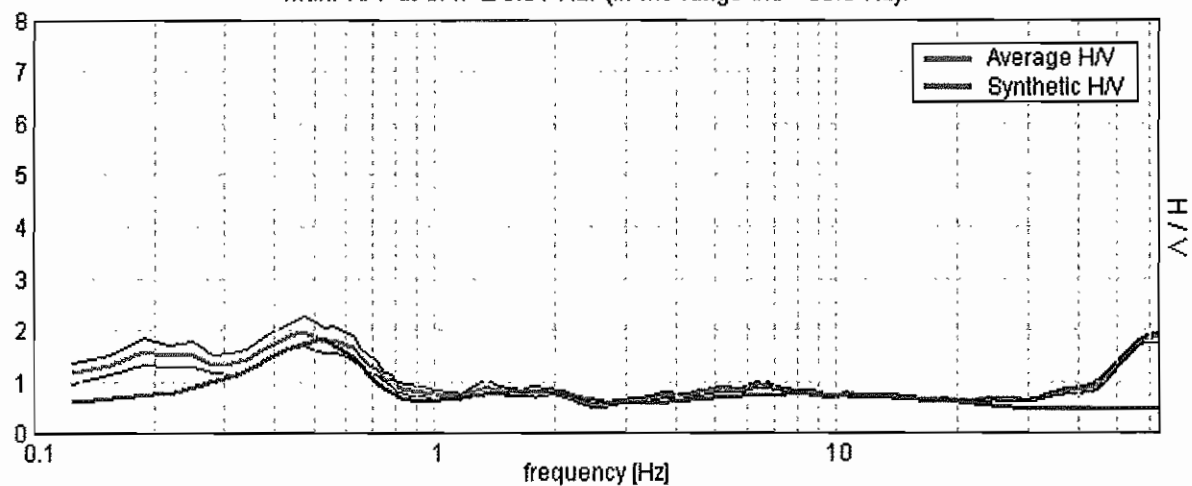

Depth at the bottom of the layer
[m]

Thickness [m]


Vs [m/s]

1.50
6.00
11.00
20.00
115.00
inf.

1.50
4.50
5.00
9.00
95.00
inf.

110
150
185
150
245
450

Vs(0.0-30.0)=175m/s

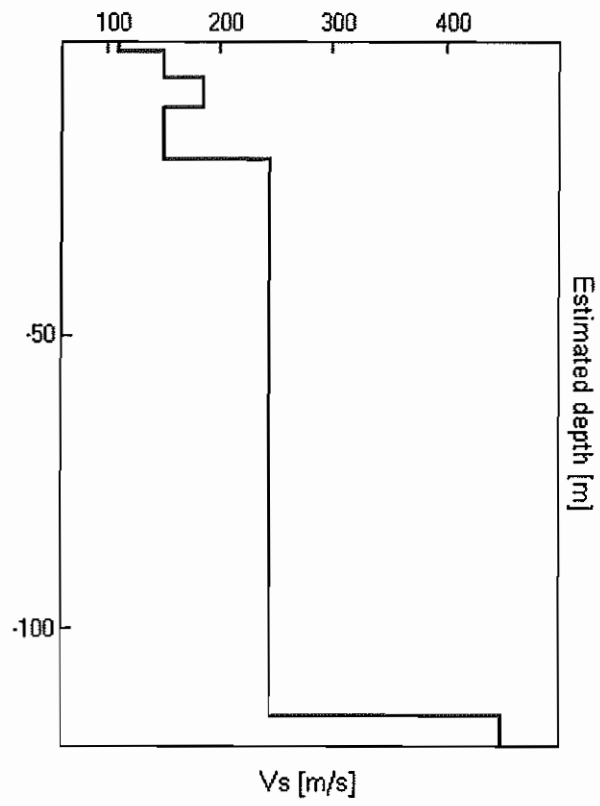

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 0.47 ± 0.01 Hz. (in the range 0.0 - 30.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.47 > 0.50$		NO
$n_c(f_0) > 200$	$562.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 24 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	0.813 Hz	OK	
$A_0 > 2$	$1.99 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.00629 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.00295 < 0.09375$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.1386 < 2.5$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


RAVENNA – n. 5

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available


Trace length: 0h20'00". Analysis performed on the entire trace.
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 1.13 ± 0.08 Hz. (in the range 0.0 - 20.0 Hz)

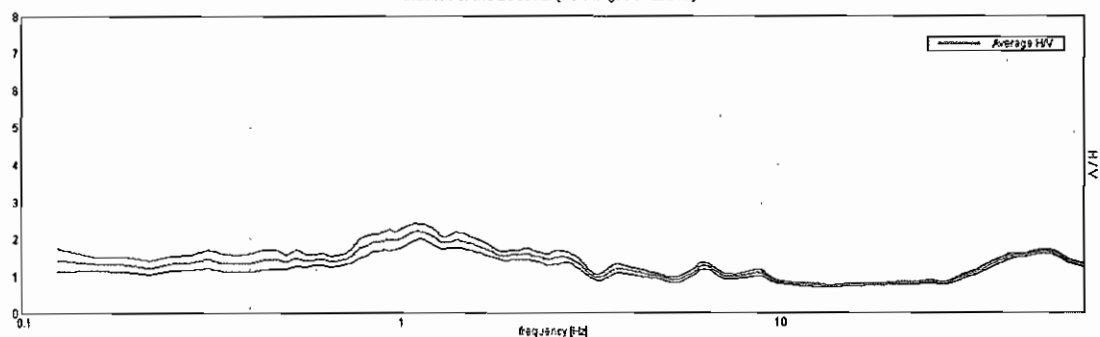


H/V TIME HISTORY

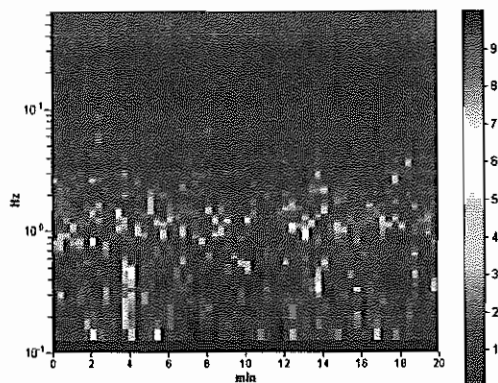


DIRECTIONAL H/V

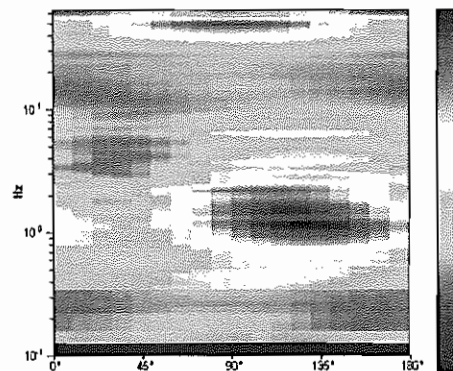

SINGLE COMPONENT SPECTRA

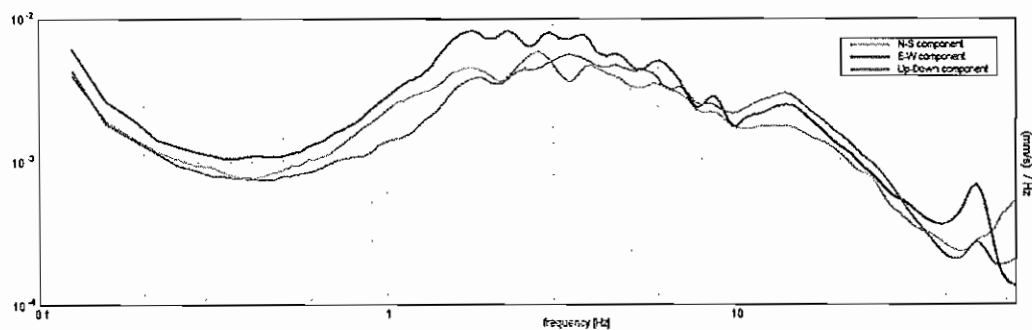

EXPERIMENTAL VS. SYNTHETIC H/V

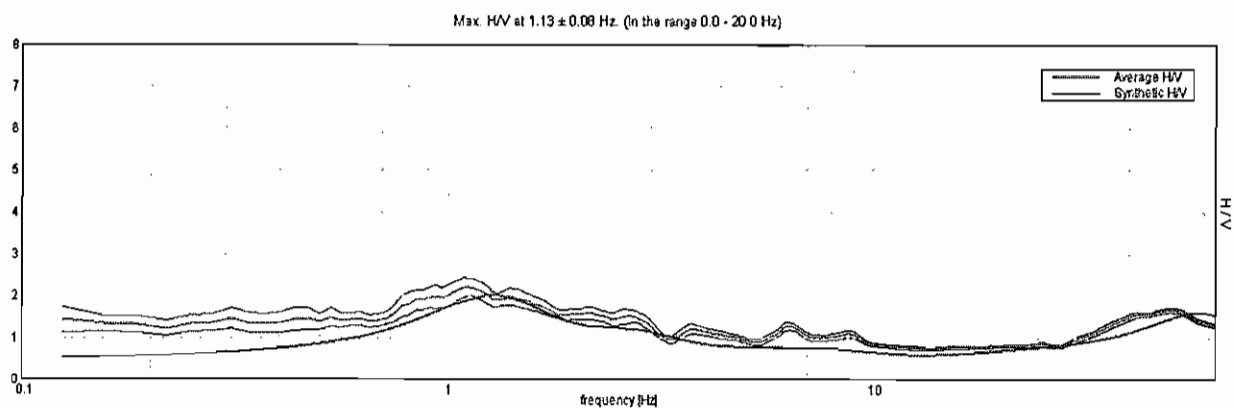

Depth at the bottom of the layer

Thickness [m]

Vs [m/s]

[m]

0.20

0.20

50

3.20

3.00

100

9.20

6.00

140

17.20

8.00

190

29.20

12.00

240

47.20

18.00

260

69.20

22.00


350

inf.

inf.

400

Vs(0.0-30.0)=174m/s

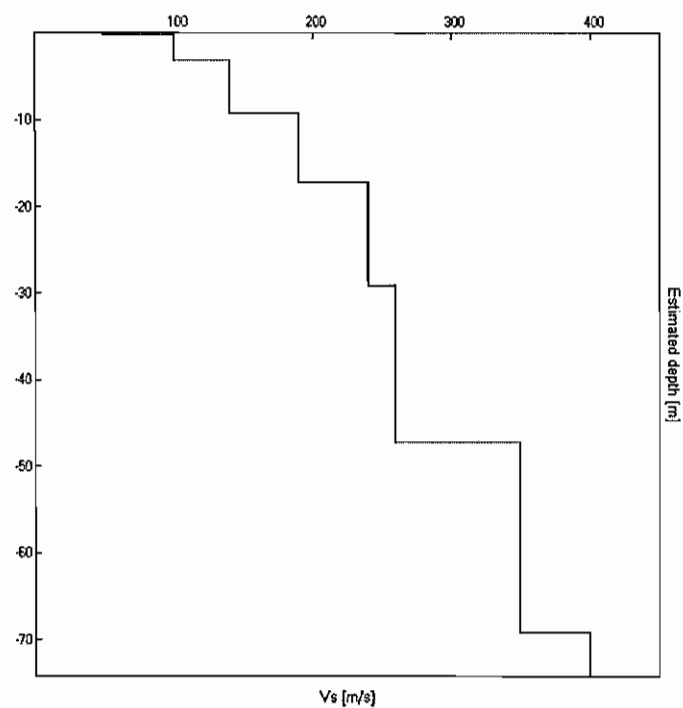

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 1.13 ± 0.08 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$1.13 > 0.50$	OK	
$n_c(f_0) > 200$	$1350.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 55 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	3.156 Hz	OK	
$A_0 > 2$	$2.20 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.03432 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.0386 < 0.1125$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.1015 < 1.78$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 6

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h20'00". Analyzed 83% trace (manual window selection)

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.94 ± 0.11 Hz (in the range 0.0 - 20.0 Hz).

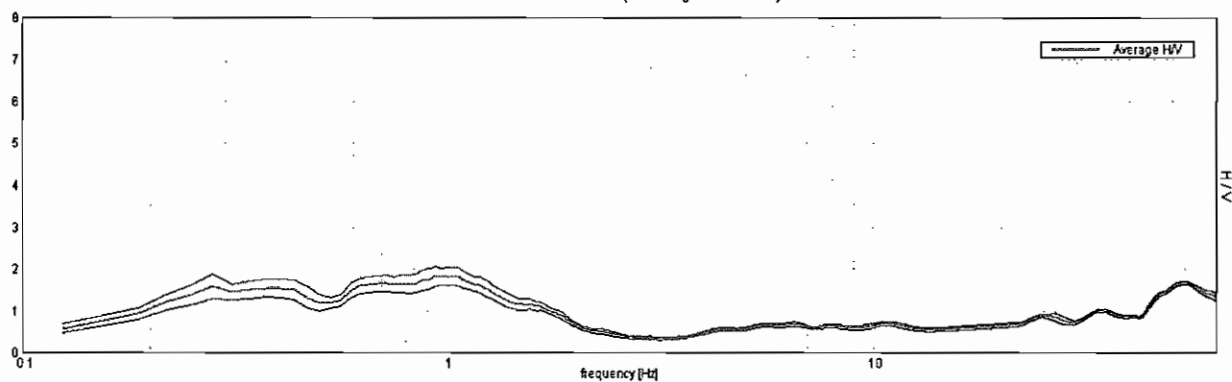


H/V TIME HISTORY

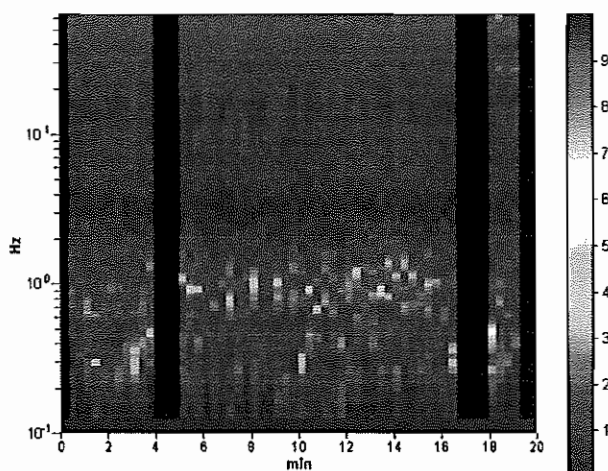


DIRECTIONAL H/V

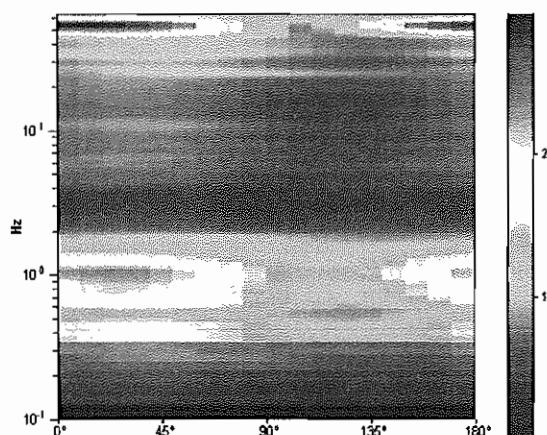

SINGLE COMPONENT SPECTRA

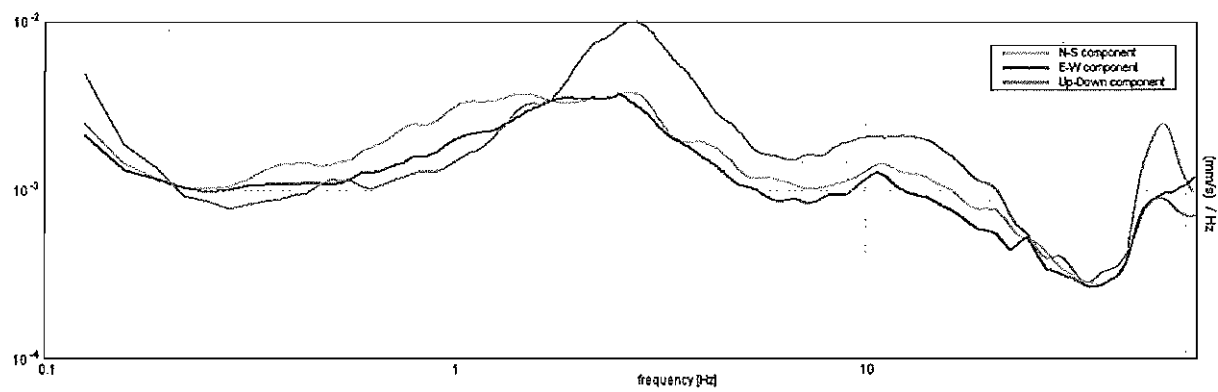


EXPERIMENTAL VS. SYNTHETIC H/V

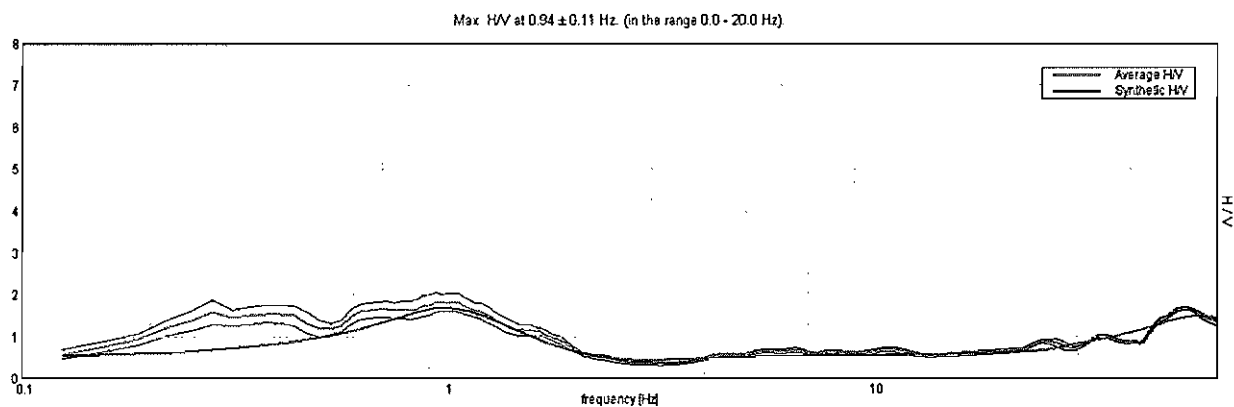

Depth at the bottom of the layer [m]	Thickness [m]	Vs [m/s]
0.40	0.40	100
10.40	10.00	195
24.40	14.00	185
29.40	5.00	250
53.40	24.00	290
95.40	42.00	360
inf.	inf.	450

Vs(0.0-30.0)=196m/s

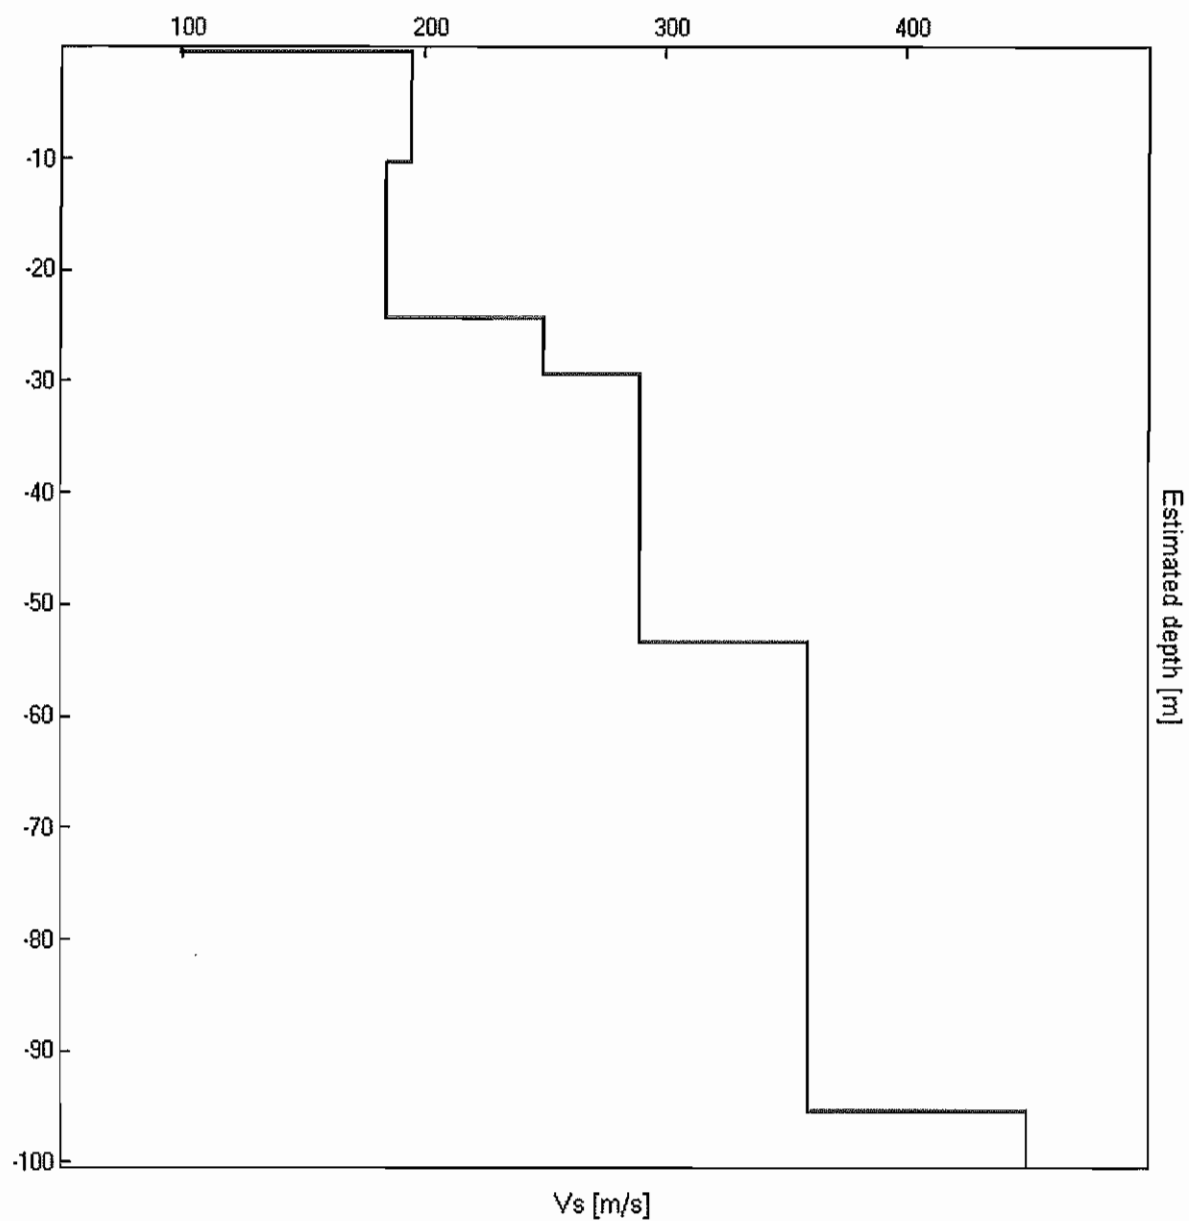

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 0.94 ± 0.11 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.94 > 0.50$	OK	
$n_c(f_0) > 200$	$937.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 46 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	1.844 Hz	OK	
$A_0 > 2$	$1.83 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.06033 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.05656 < 0.14063$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.1158 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 7

GPS data not available


Trace length: 0h20'00". Analysis performed on the entire trace.

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

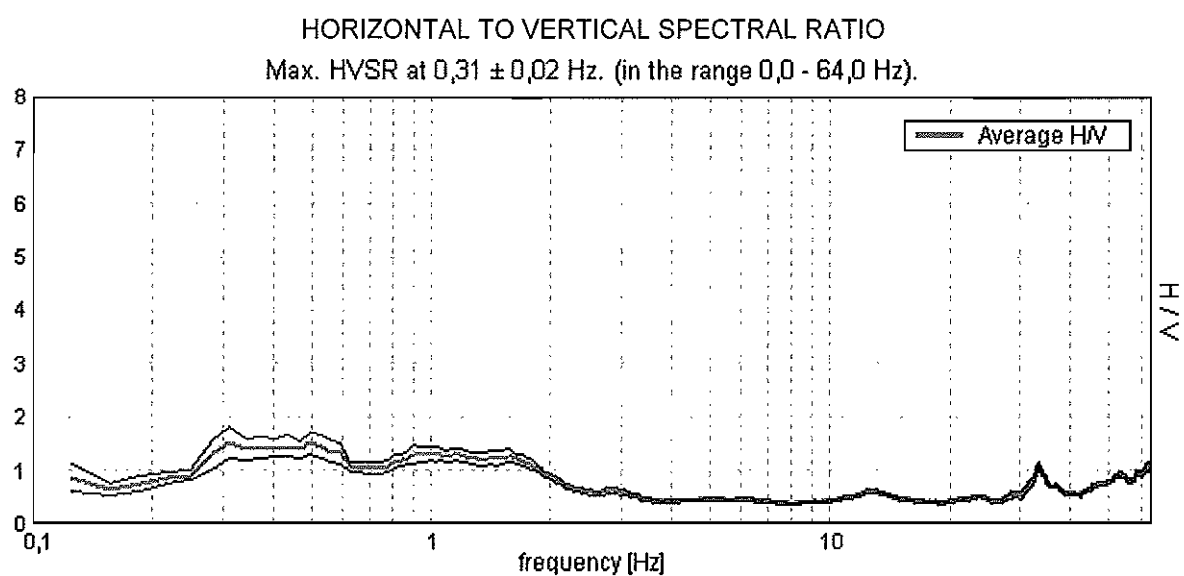


HV TIME HISTORY

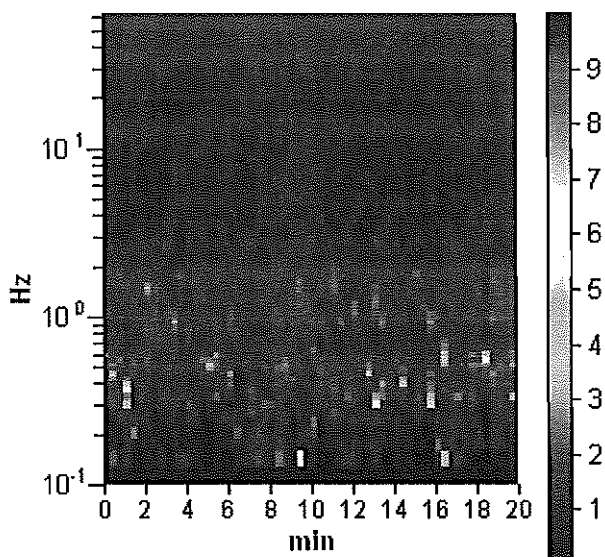

DIRECTIONAL HV

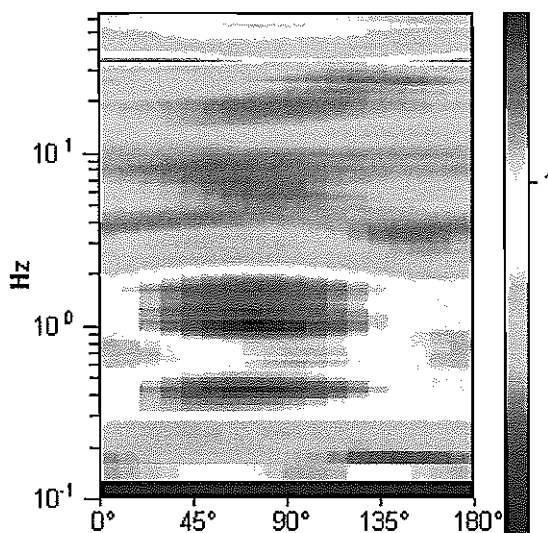


SINGLE COMPONENT SPECTRA

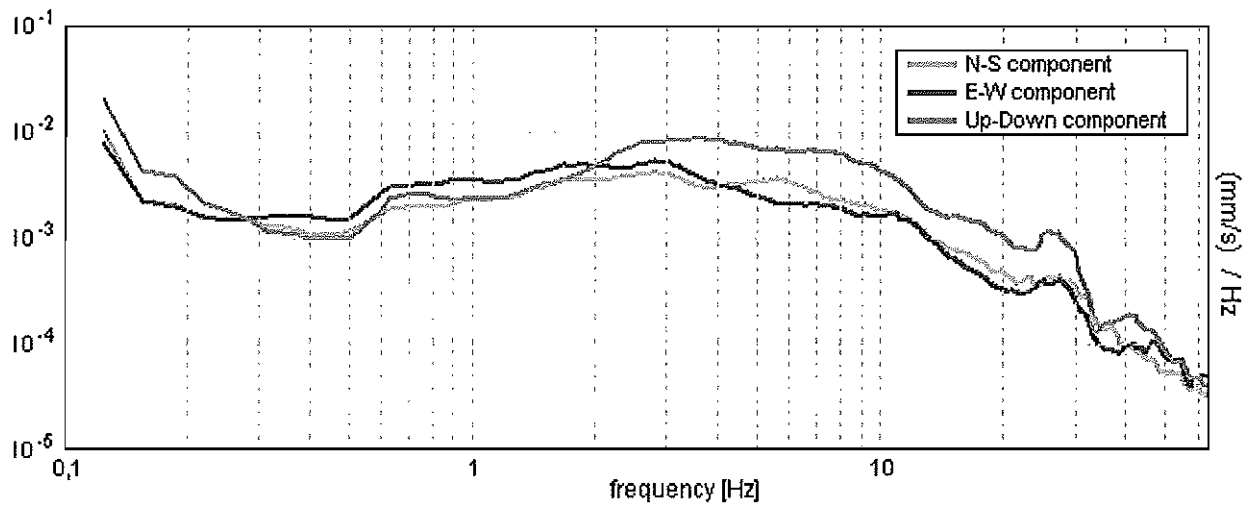


EXPERIMENTAL VS. SYNTHETIC H/V

Max. HVSr at $0,31 \pm 0,02$ Hz. (in the range 0,0 - 64,0 Hz).

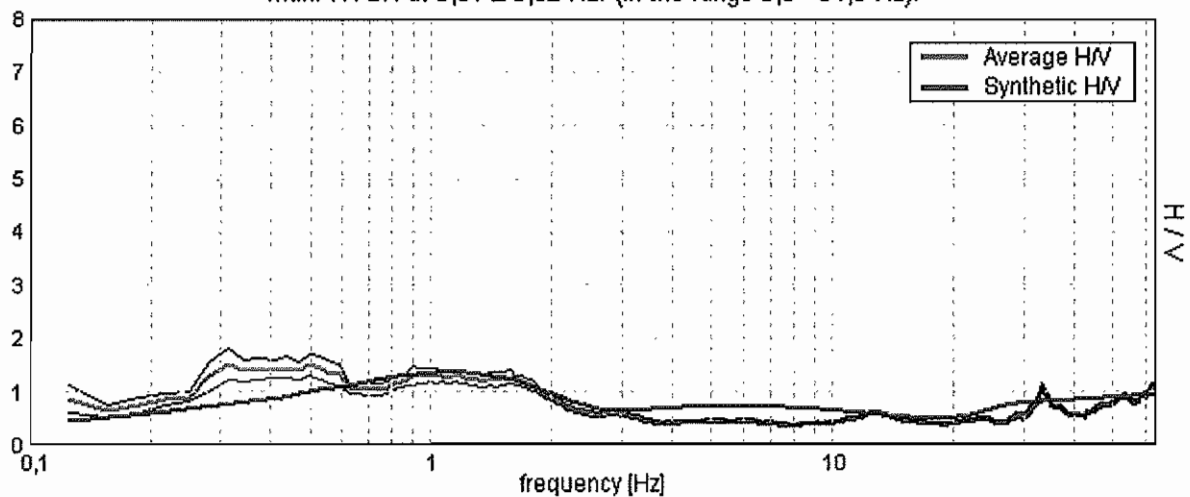

Depth at the bottom of the layer [m]	Thickness [m]	Vs [m/s]
0,30	0,30	130
3,30	3,00	167
10,30	7,00	180
16,30	6,00	167
22,30	6,00	170
28,30	6,00	180
49,30	21,00	280
69,30	20,00	250
inf.	inf.	290

Vs30=177 m/s

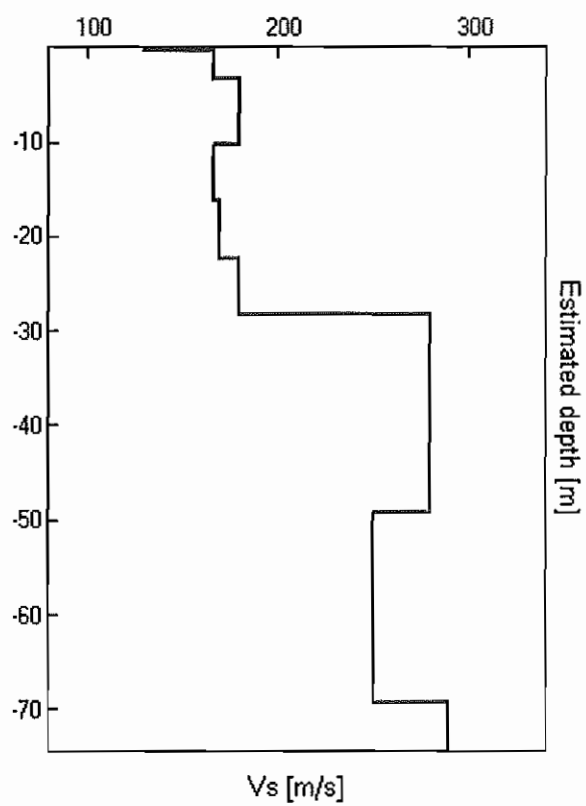

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. HVSR at $0,31 \pm 0,02$ Hz. (in the range 0,0 - 64,0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0,31 > 0,50$		NO
$n_c(f_0) > 200$	$375,0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 16 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	0,188 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$1,51 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0,03902 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0,01219 < 0,0625$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0,1474 < 2,5$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 32

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available

Trace length: 0h20'00". Analysis performed on the entire trace.

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max H/V at 1.72 ± 0.16 Hz (in the range 0.0 - 20.0 Hz)

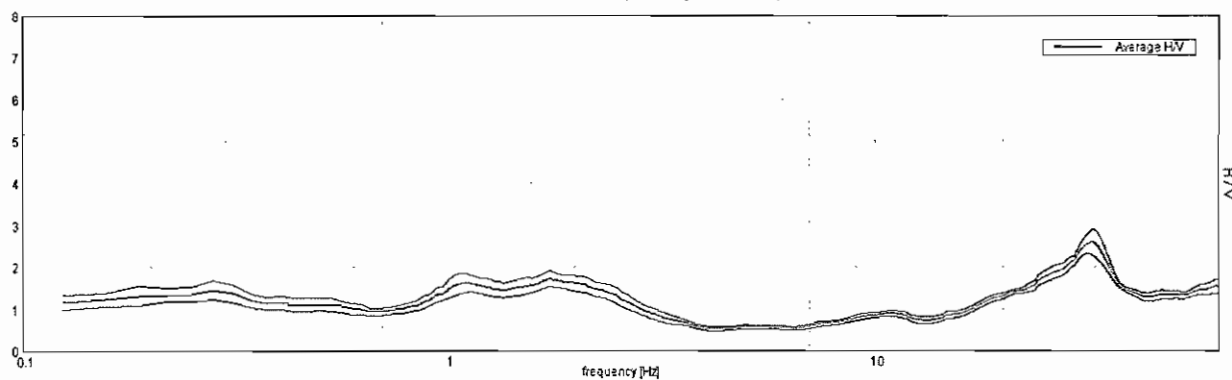


H/V TIME HISTORY

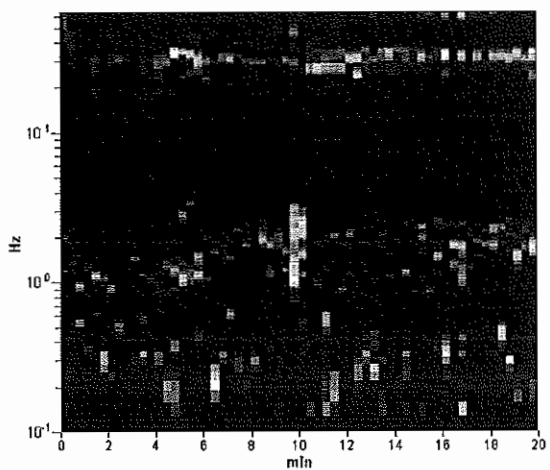


DIRECTIONAL H/V

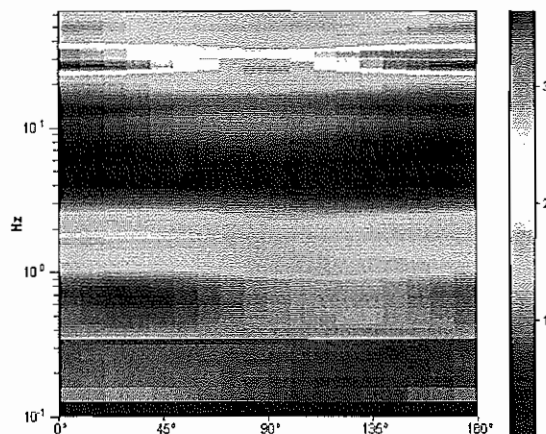

SINGLE COMPONENT SPECTRA

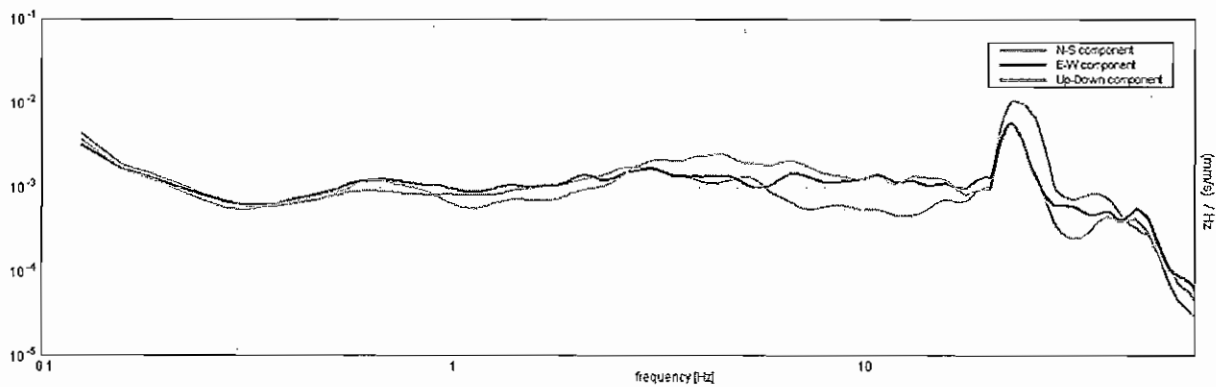

EXPERIMENTAL VS. SYNTHETIC H/V

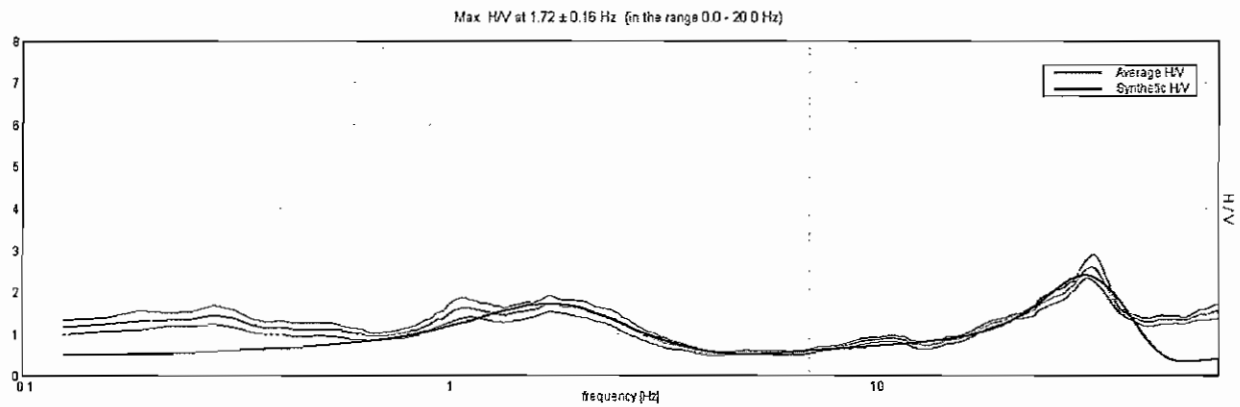

Depth at the bottom of the layer

[m]

0.40
9.00
24.00
49.00
inf.


Thickness [m]

0.40
8.60
15.00
25.00
inf.

Vs [m/s]

50
109
185
260
290

Vs(0.0-30.0)=157m/s

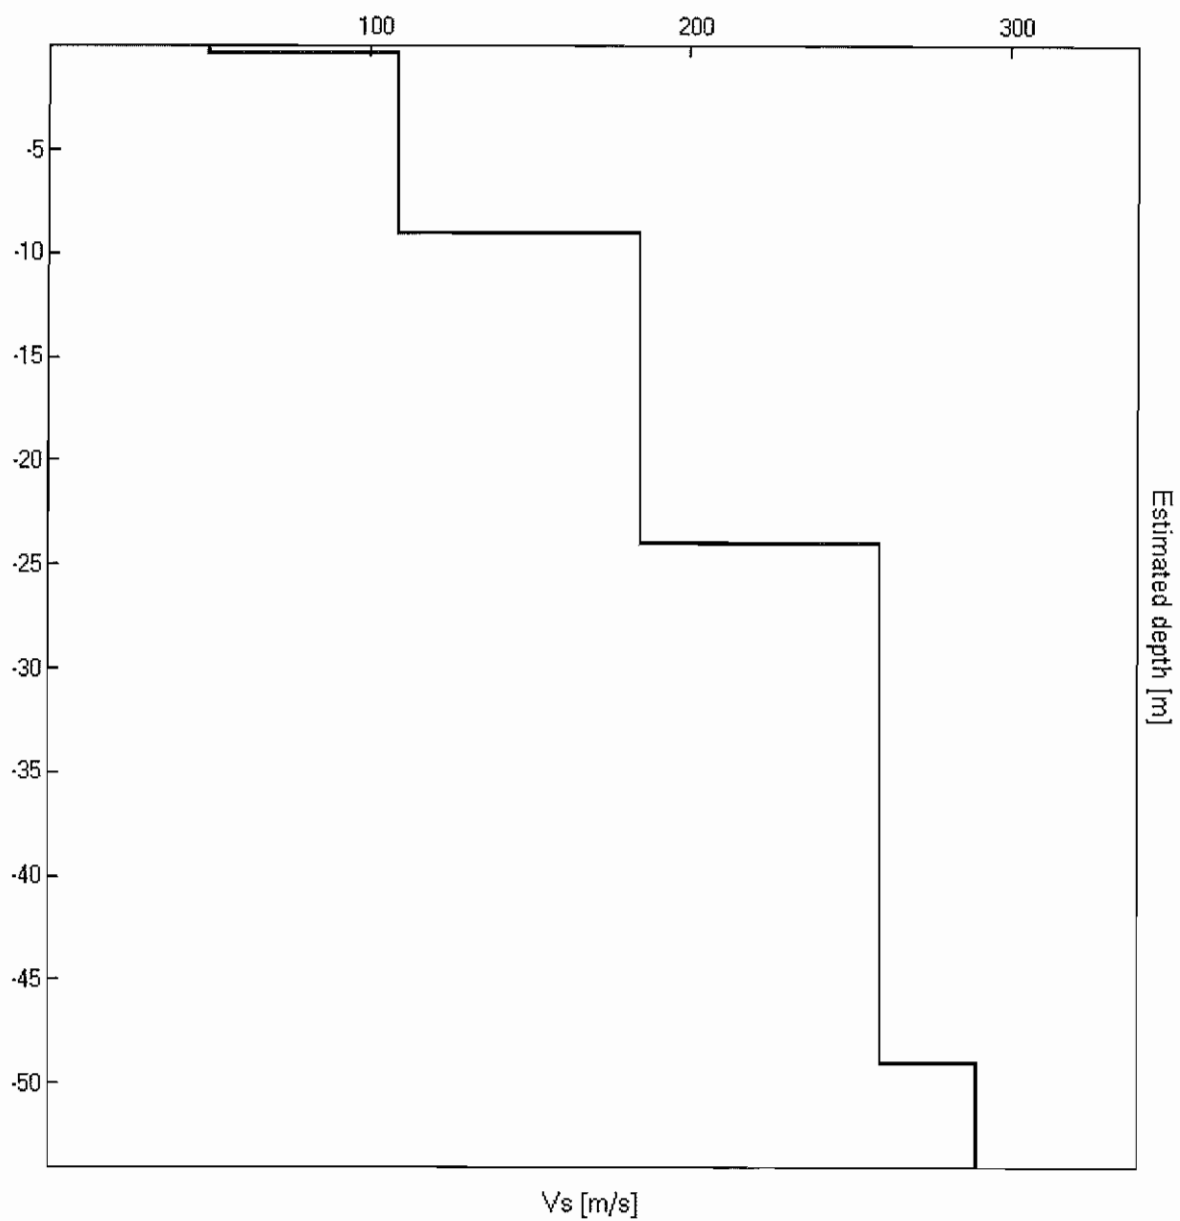

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 1.72 ± 0.16 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$1.72 > 0.50$	OK	
$n_c(f_0) > 200$	$2062.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 84 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	3.094 Hz	OK	
$A_0 > 2$	$1.72 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.0451 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.07752 < 0.17188$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.0957 < 1.78$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 2

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available

Trace length: 0h20'00". Analyzed 88% trace (manual window selection)

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. HV at 19.97 ± 2.28 Hz. (in the range 0.0 - 20.0 Hz)

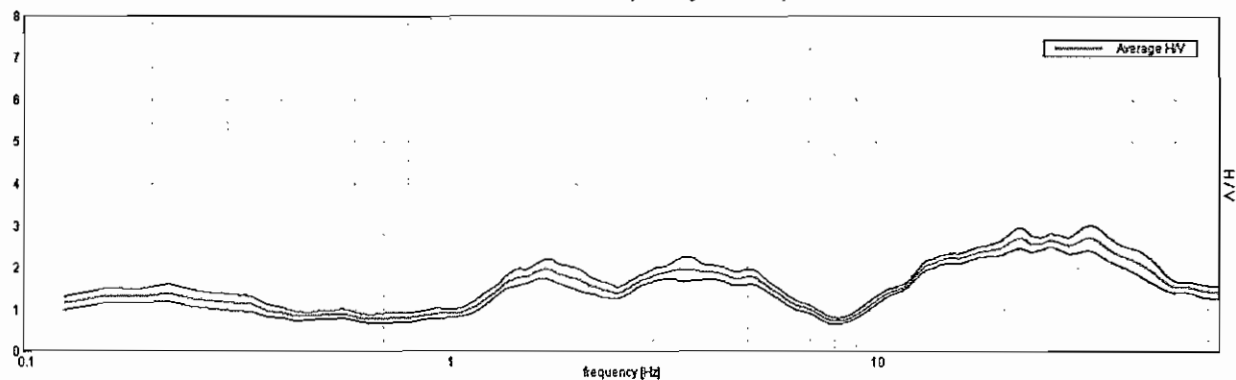


H/V TIME HISTORY

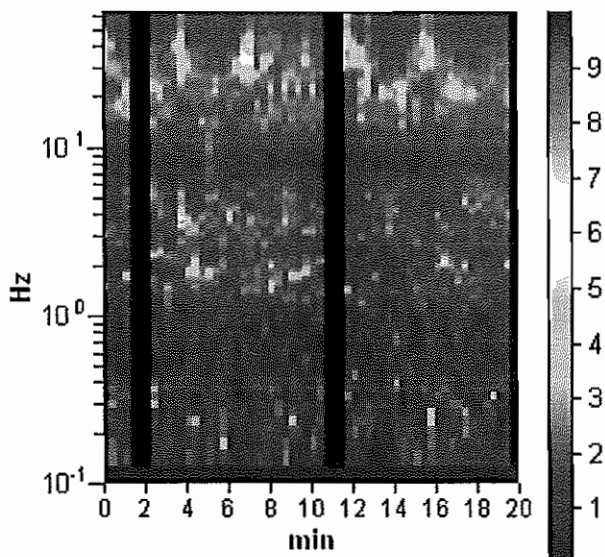


DIRECTIONAL H/V

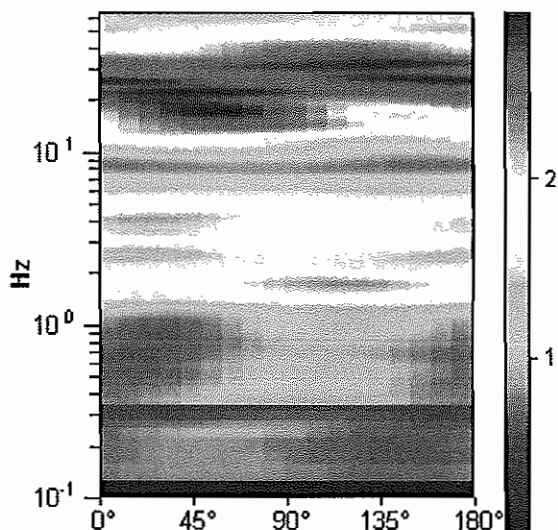

SINGLE COMPONENT SPECTRA

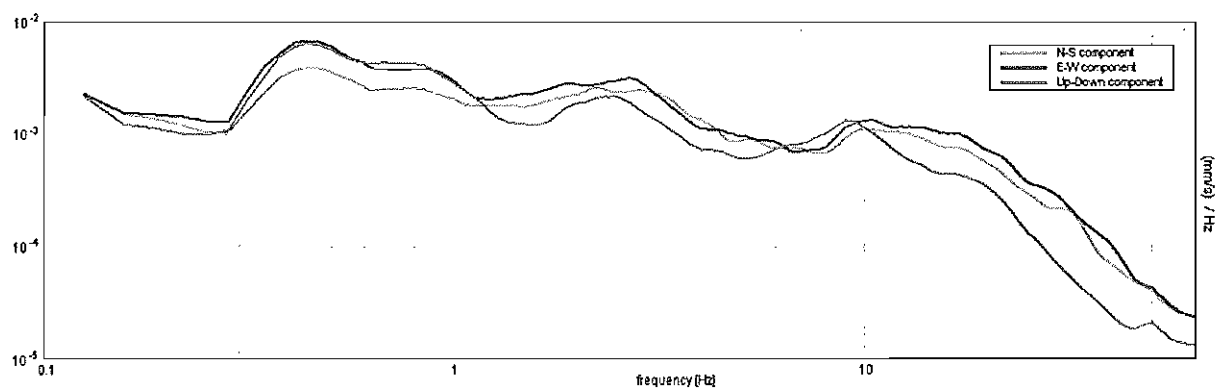

EXPERIMENTAL VS. SYNTHETIC H/V

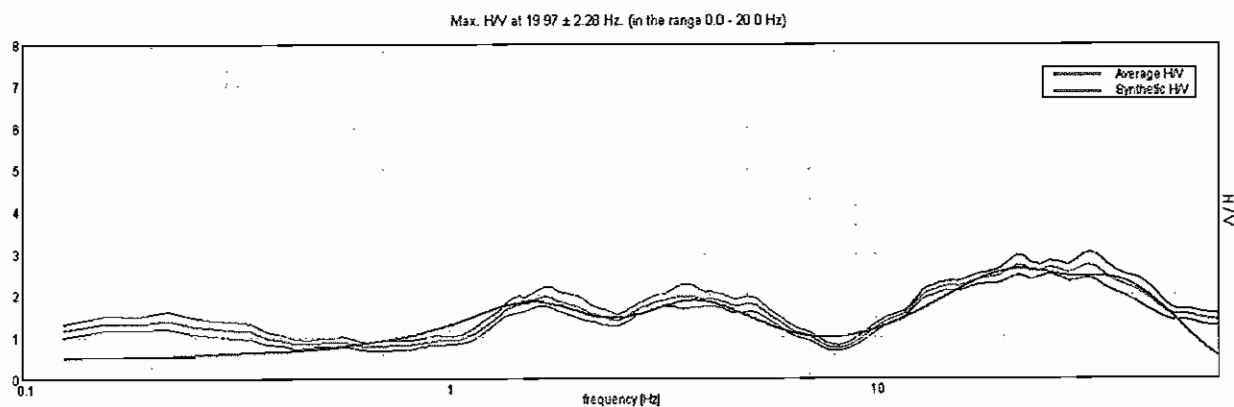

Depth at the bottom of the layer
[m]

Thickness [m]

Vs [m/s]

0.18

0.18

32

0.58

0.40

68

1.38

0.80

100

3.38

2.00

145

8.38

5.00

170

14.38

6.00

245

24.38

10.00

290

61.38

37.00


370

inf.

inf.

550

Vs(0.0-30.0)=219m/s

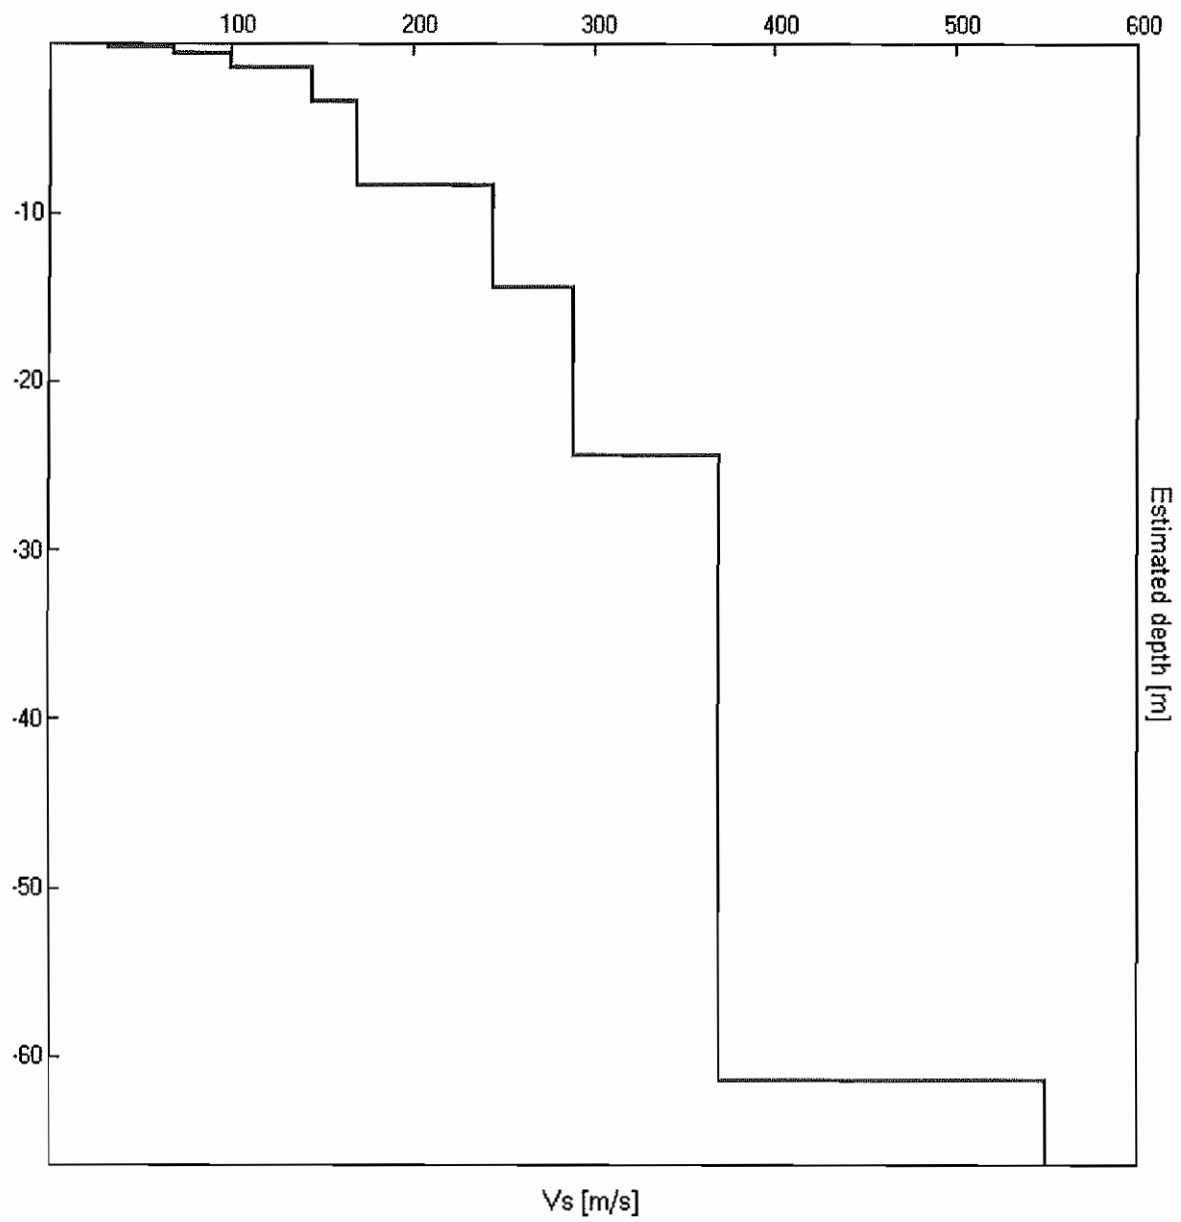

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 19.97 ± 2.28 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$19.97 > 0.50$	OK	
$n_c(f_0) > 200$	$21166.9 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 960 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	10.094 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$2.51 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.05637 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$1.12564 < 0.99844$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.0916 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – N. 1

Channel labels: NORTH SOUTH; EAST WEST; UP DOWN

GPS data not available

Trace length: 0h20'00". Analyzed 75% trace (manual window selection)

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. HV at 1.66 ± 0.21 Hz. (in the range 0.0 - 20.0 Hz)

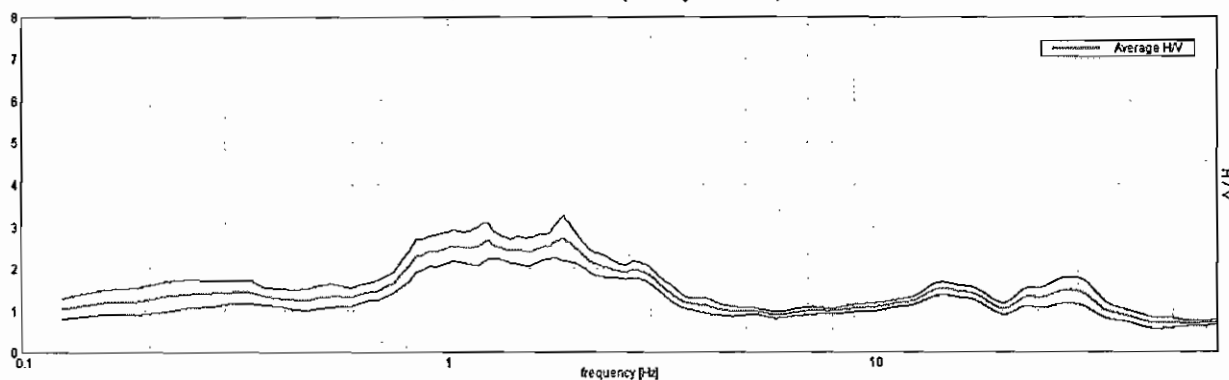


H/V TIME HISTORY

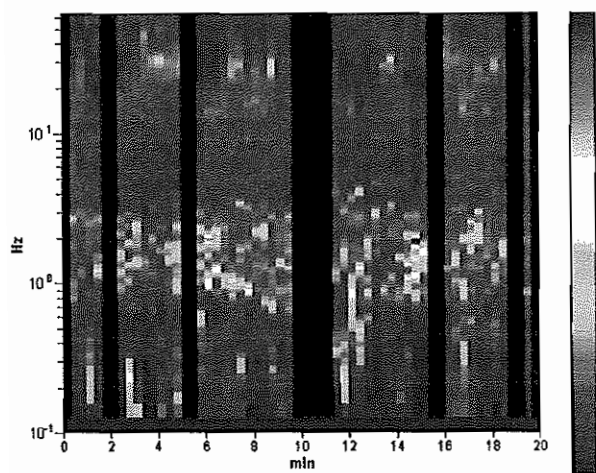


DIRECTIONAL HV

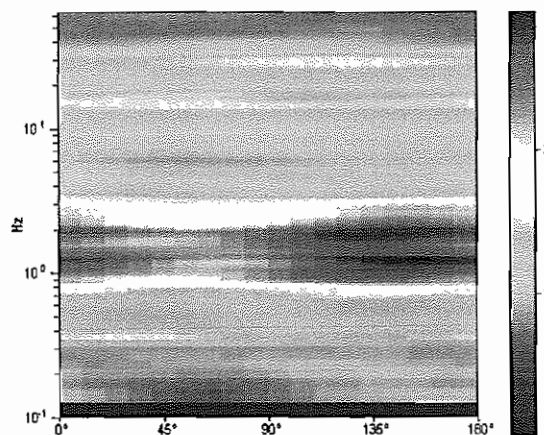

SINGLE COMPONENT SPECTRA

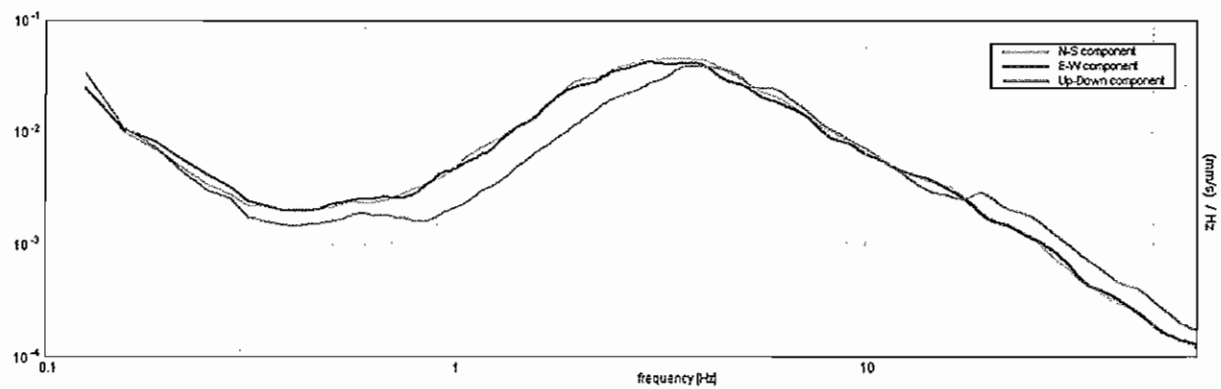

EXPERIMENTAL VS. SYNTHETIC H/V

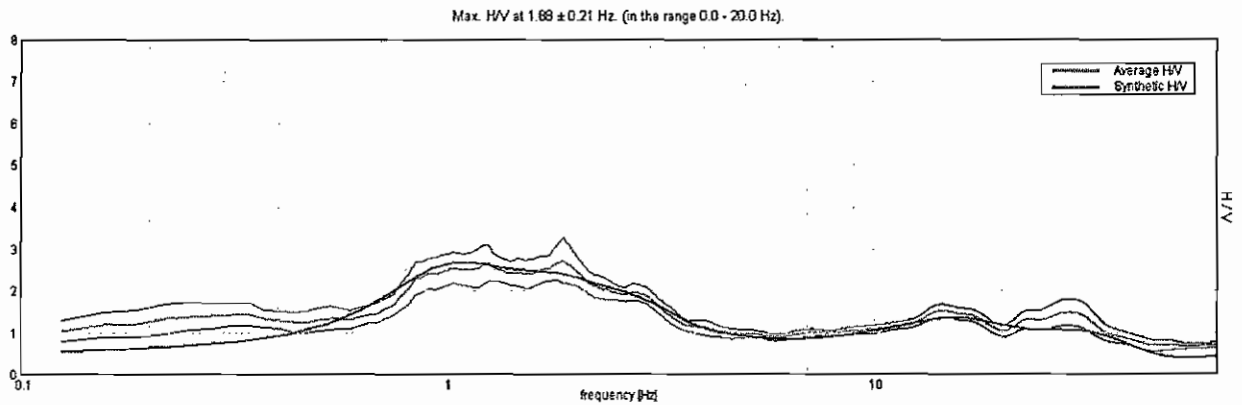


Depth at the bottom of the layer
[m]

Thickness [m]

Vs [m/s]

0.40	0.40	50
1.60	1.20	93
6.10	4.50	133
12.10	6.00	170
25.10	13.00	240
57.10	32.00	350
69.10	12.00	470
132.10	63.00	520
154.10	22.00	630
inf.	inf.	720

Vs(0.0-30.0)=190m/s

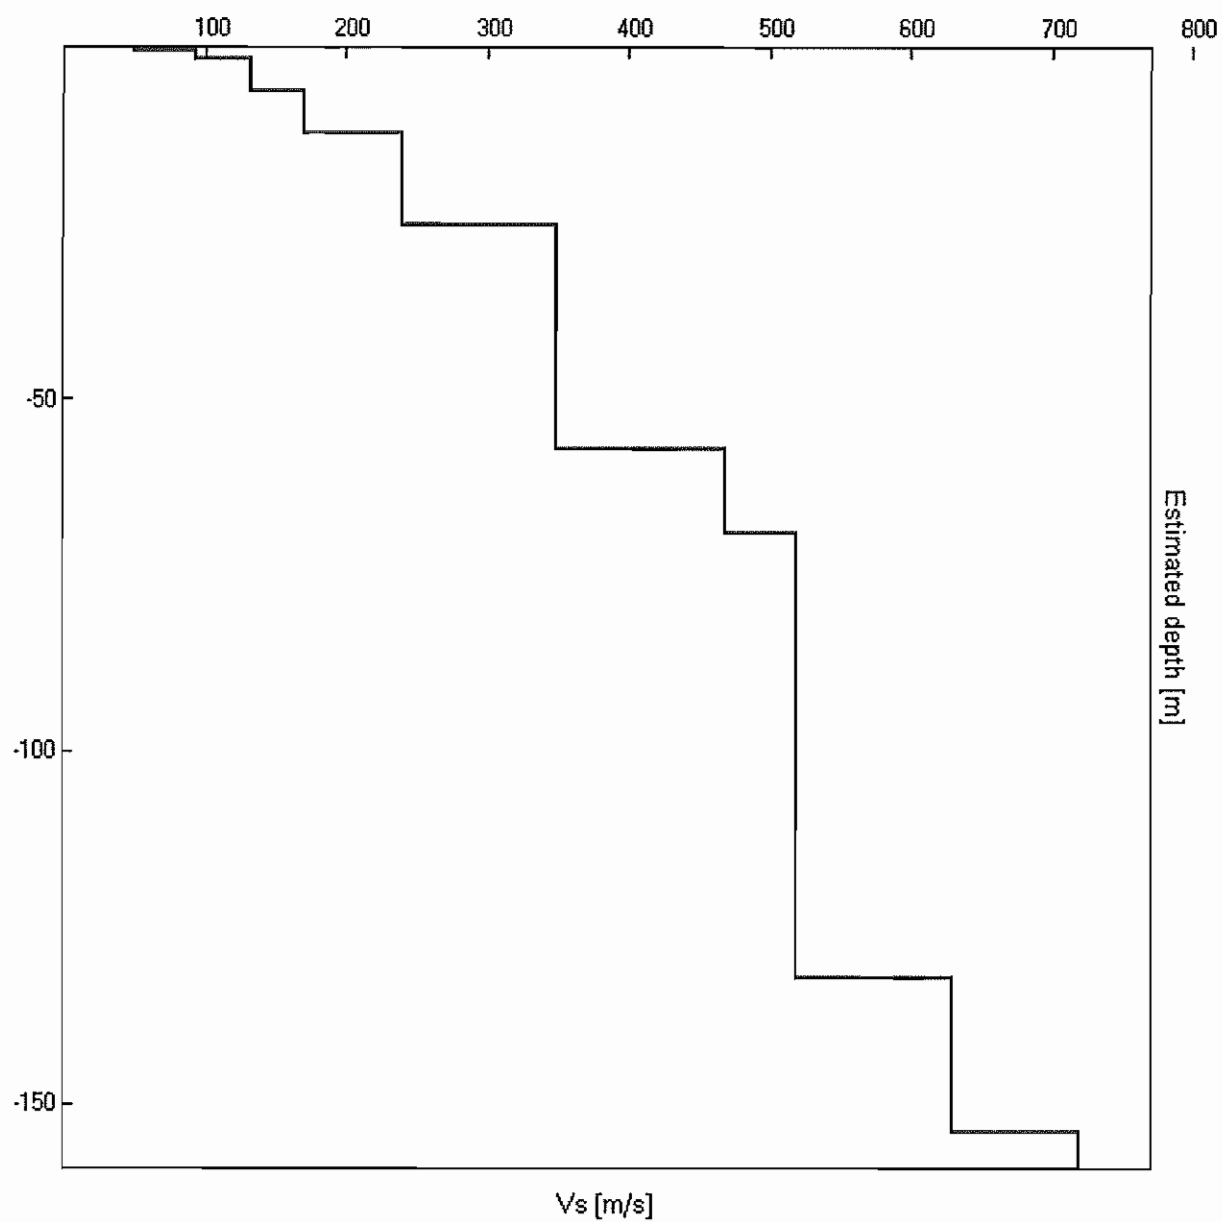

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 1.88 ± 0.21 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$1.88 > 0.50$	OK	
$n_c(f_0) > 200$	$1687.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 91 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	0.594 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	3.406 Hz	OK	
$A_0 > 2$	$2.73 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.05398 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.10121 < 0.1875$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.2633 < 1.78$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 3


Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h20'00". Analysis performed on the entire trace.
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

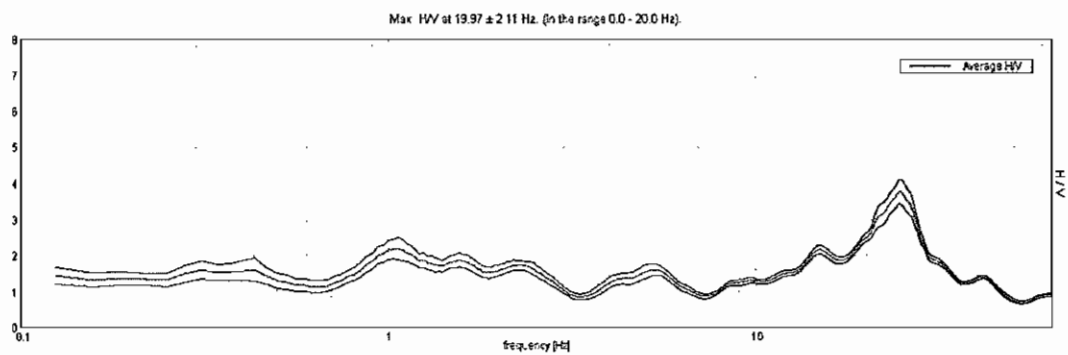


H/V TIME HISTORY

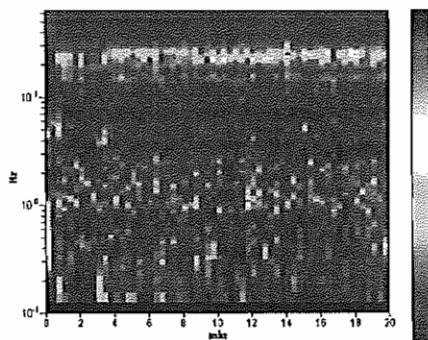


DIRECTIONAL H/V

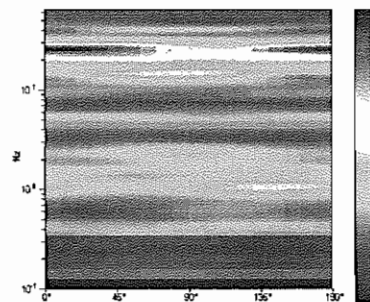

SINGLE COMPONENT SPECTRA

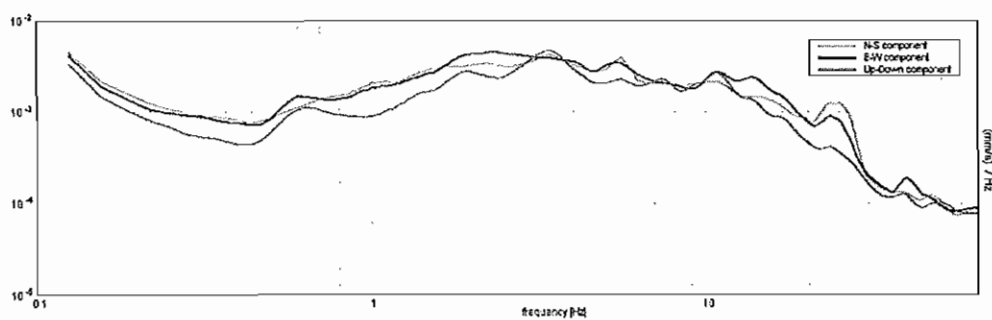

EXPERIMENTAL VS. SYNTHETIC H/V

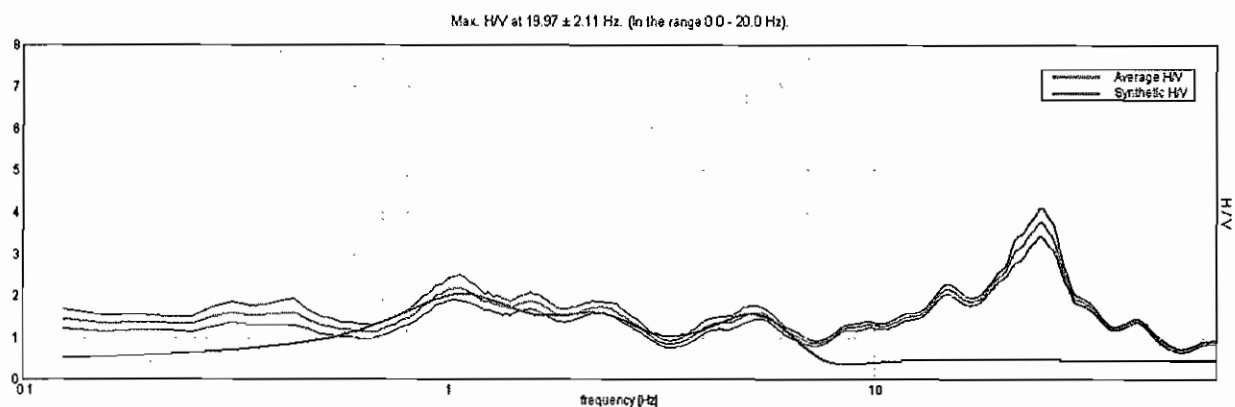

Depth at the bottom of the layer

Thickness [m]

Vs [m/s]

[m]

4.00

4.00

80

20.00

16.00

160

67.00

47.00


280

inf.

inf.

430

Vs(0.0-30.0)=162m/s

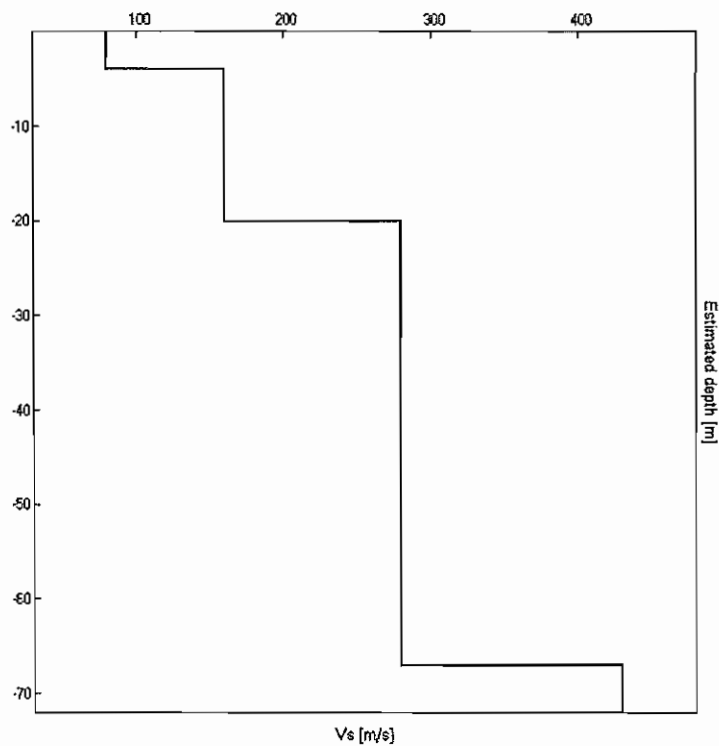

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 19.97 ± 2.11 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$19.97 > 0.50$	OK	
$n_c(f_0) > 200$	$23962.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 960 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	9.0 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	35.906 Hz	OK	
$A_0 > 2$	$2.50 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.05226 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$1.04364 < 0.99844$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.0587 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


RAVENNA – n. 8

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available


Trace length: 0h16'00". Analysis performed on the entire trace.
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. HV at 56.53 ± 1.05 Hz. (in the range 0.0 - 64.0 Hz)

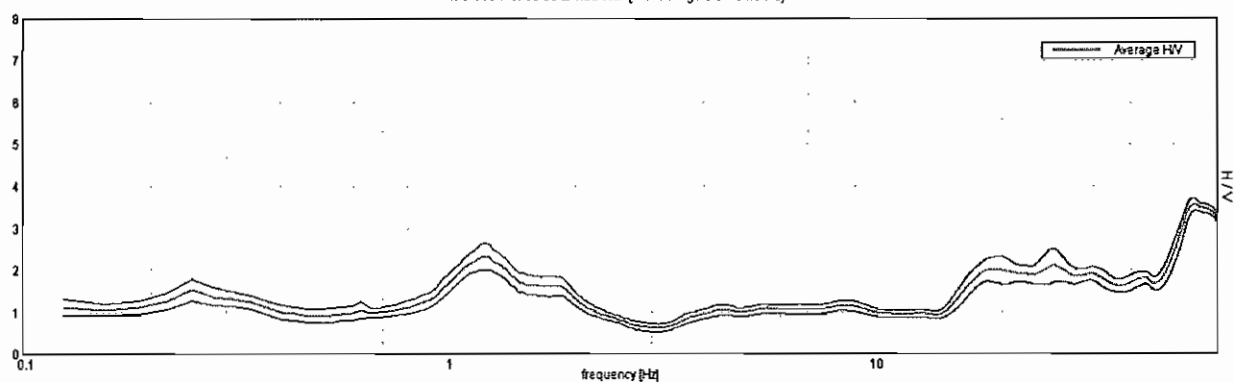


H/V TIME HISTORY

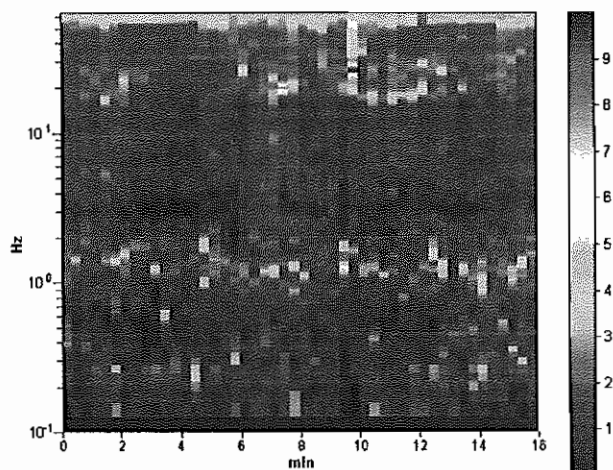


DIRECTIONAL H/V

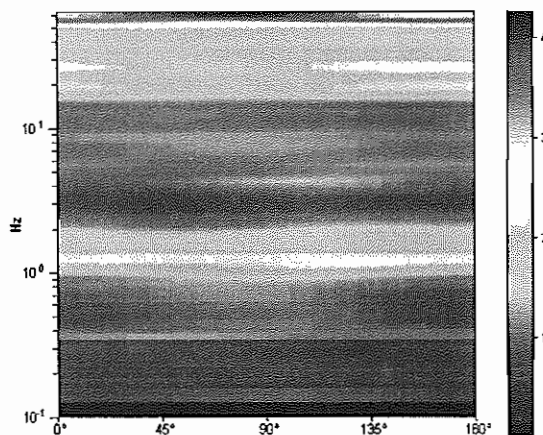

SINGLE COMPONENT SPECTRA

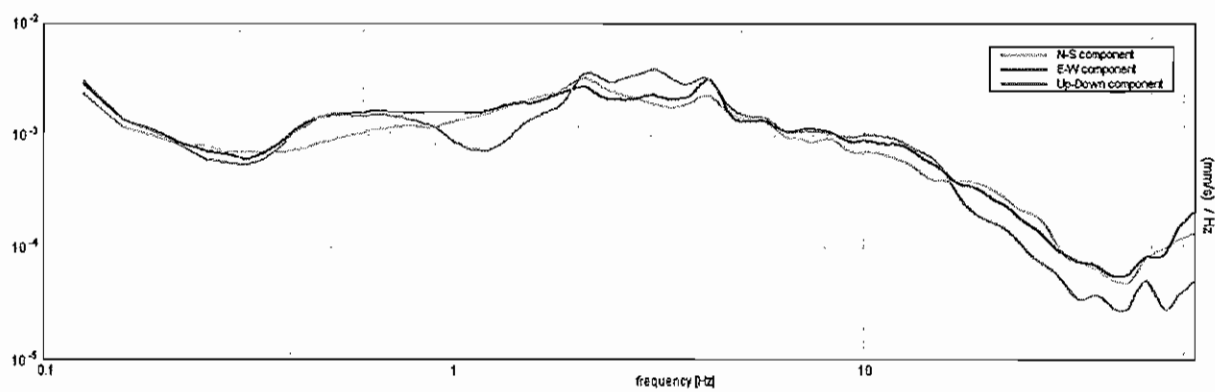

EXPERIMENTAL VS. SYNTHETIC H/V

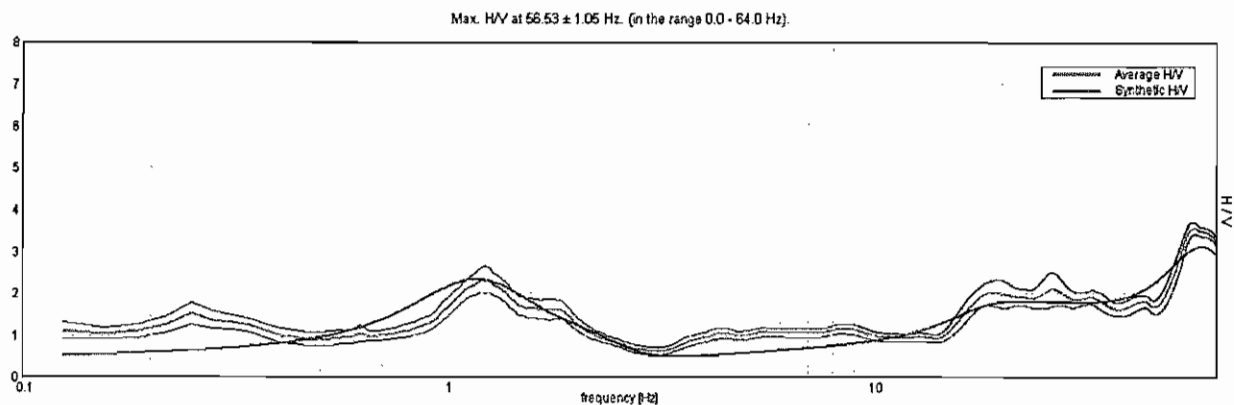

Depth at the bottom of the layer

Thickness [m]

Vs [m/s]

[m]

0.23

0.23

50

1.03

0.80

123

1.53

0.50

175

2.53

1.00

189

7.53

5.00

230

11.53

4.00

180

27.53

16.00

220

45.53

18.00

370

57.53

12.00

400

99.53

42.00


440

inf.

inf.

630

Vs(0.0-30.0)=210m/s

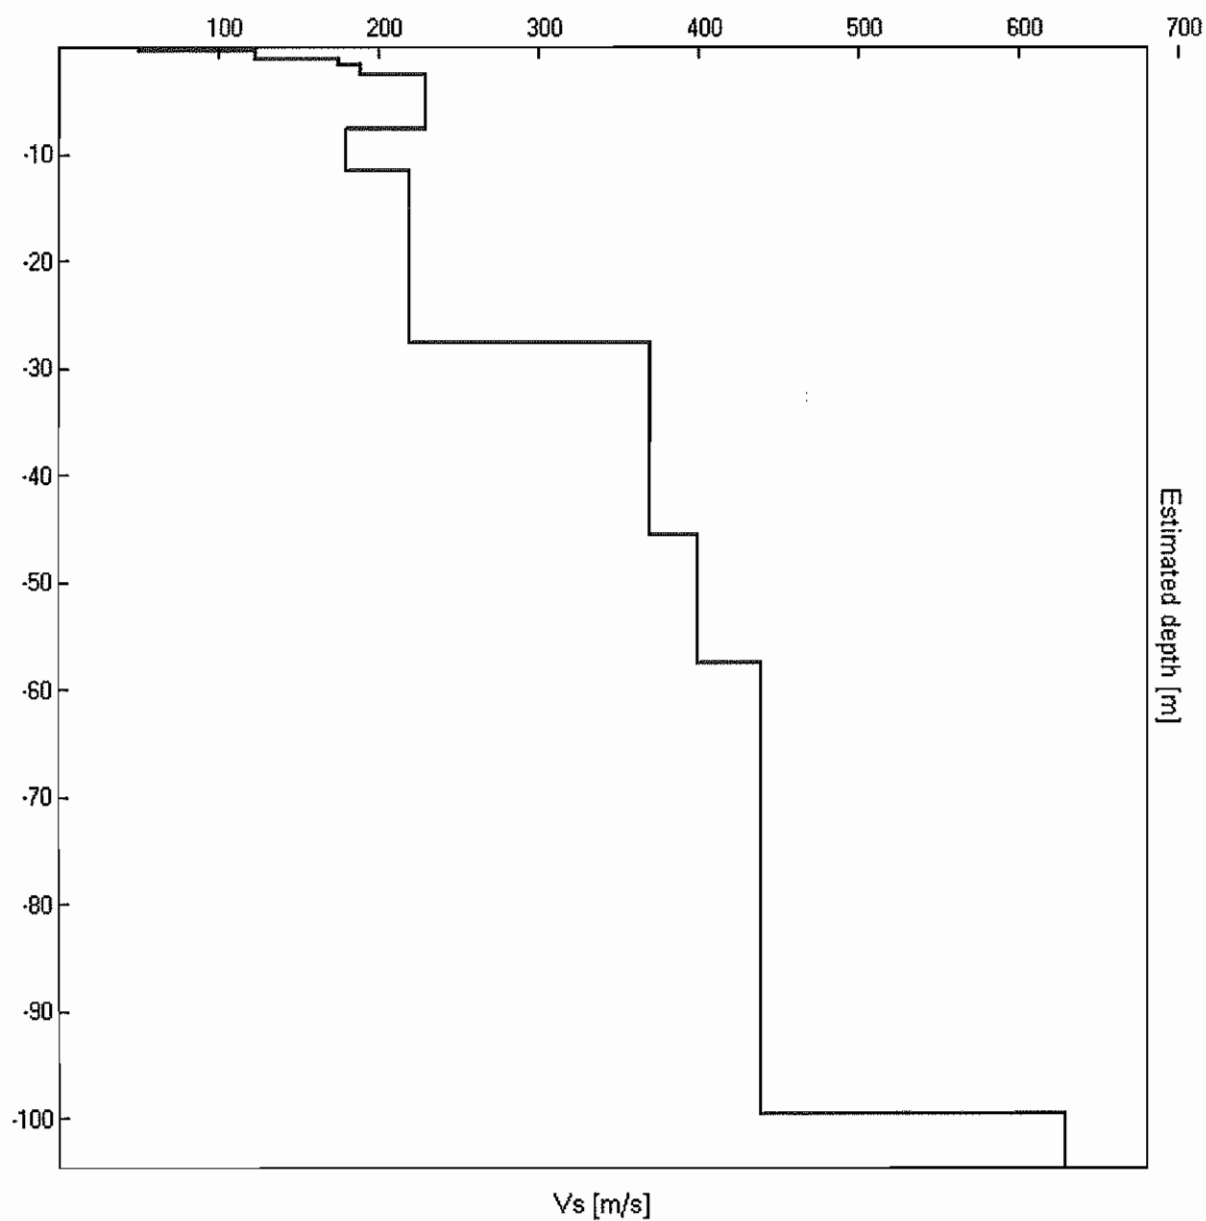

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 56.53 ± 1.05 Hz. (in the range 0.0 - 64.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	56.53 > 0.50	OK	
$n_c(f_0) > 200$	54270.0 > 200	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 1144 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	47.156 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	3.56 > 2	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.00911 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	0.51472 < 2.82656	OK	
$\sigma_A(f_0) < \theta(f_0)$	0.0706 < 1.58	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	0.25 f_0	0.2 f_0	0.15 f_0	0.10 f_0	0.05 f_0
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 9


Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h20'00". Analyzed 77% trace (manual window selection)
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

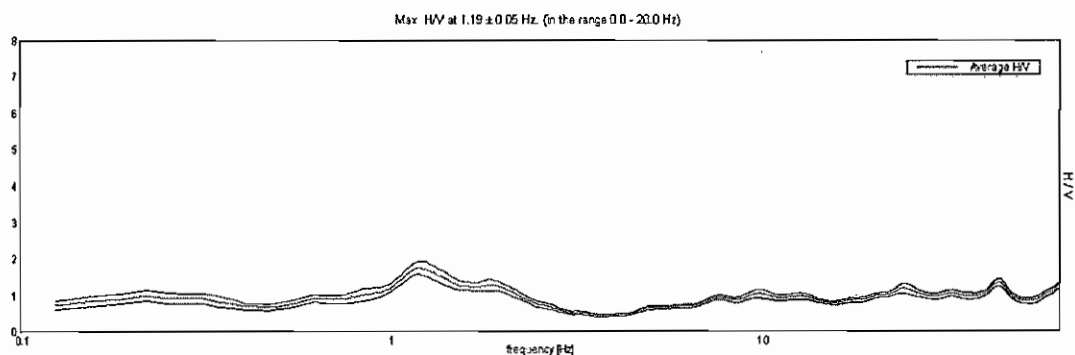


H/V TIME HISTORY

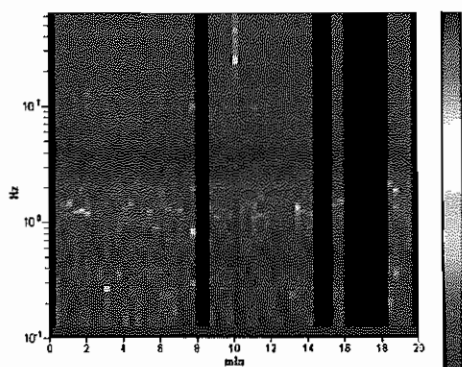


DIRECTIONAL H/V

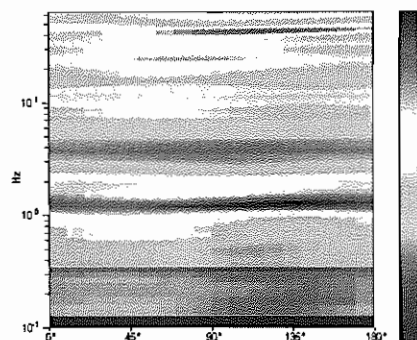

SINGLE COMPONENT SPECTRA

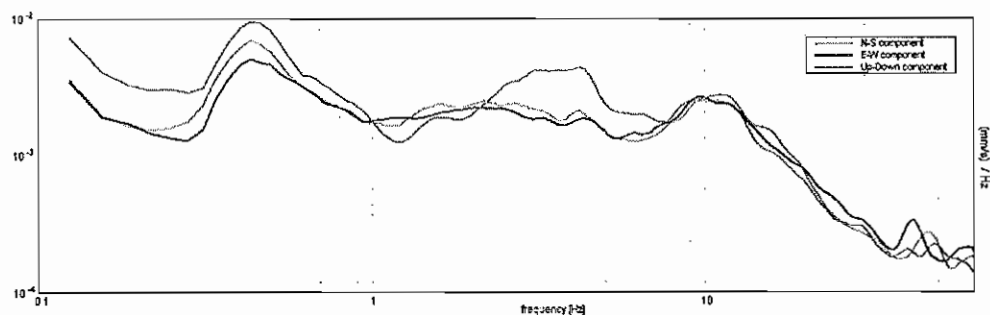


EXPERIMENTAL VS. SYNTHETIC H/V

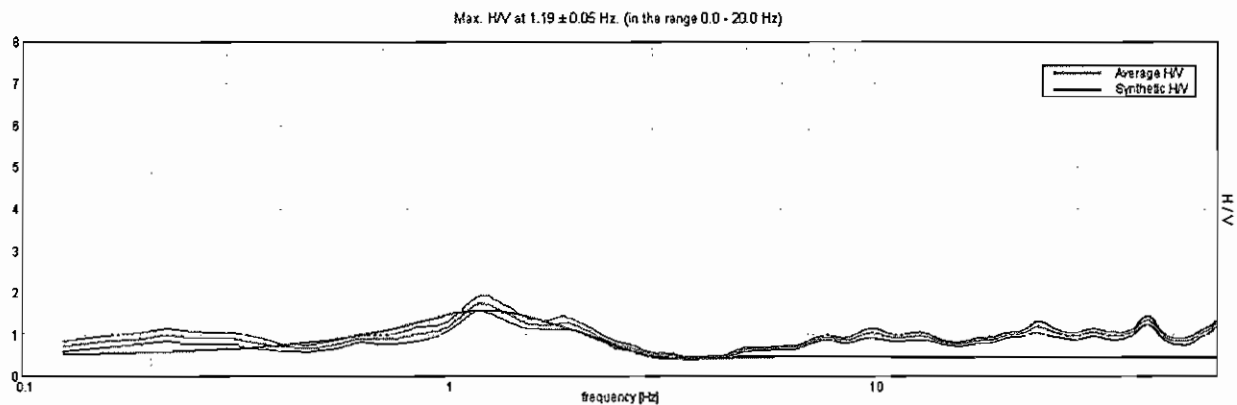

Depth at the bottom of the layer [m]	Thickness [m]	Vs [m/s]
15.50	15.50	135
27.50	12.00	220
35.50	8.00	255
50.50	15.00	260
60.50	10.00	280
inf.	inf.	340

$V_s(0.0-30.0)=167\text{m/s}$

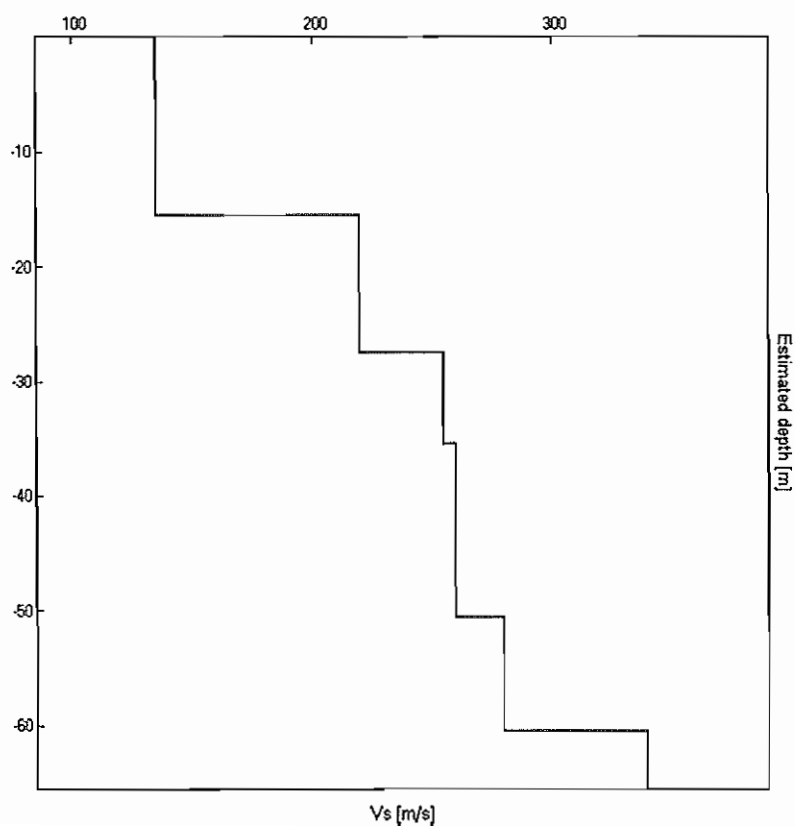

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 1.19 ± 0.05 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$1.19 > 0.50$	OK	
$n_c(f_0) > 200$	$1092.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 58 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	0.594 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	2.344 Hz	OK	
$A_0 > 2$	$1.75 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.01946 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.02311 < 0.11875$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.0856 < 1.78$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 10


Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h20'00". Analysis performed on the entire trace.
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

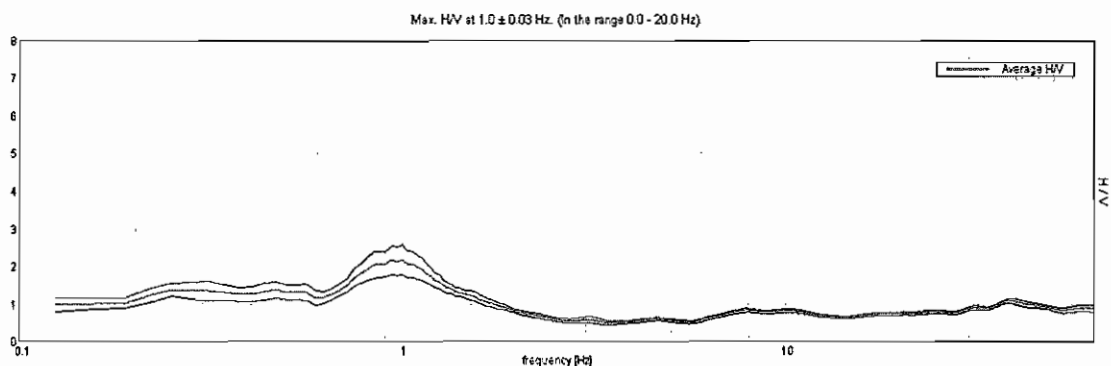


H/V TIME HISTORY

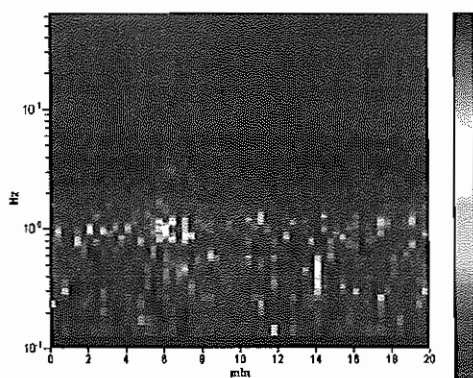


DIRECTIONAL H/V

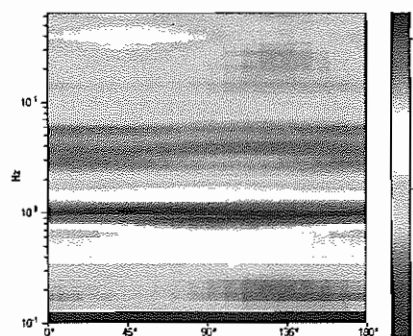

SINGLE COMPONENT SPECTRA

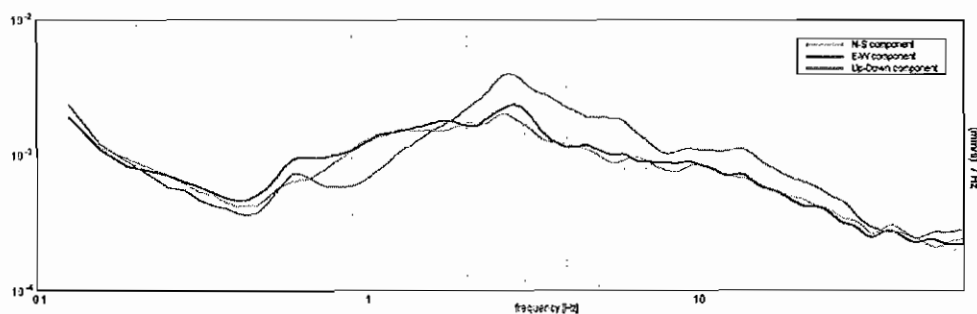

EXPERIMENTAL VS. SYNTHETIC H/V

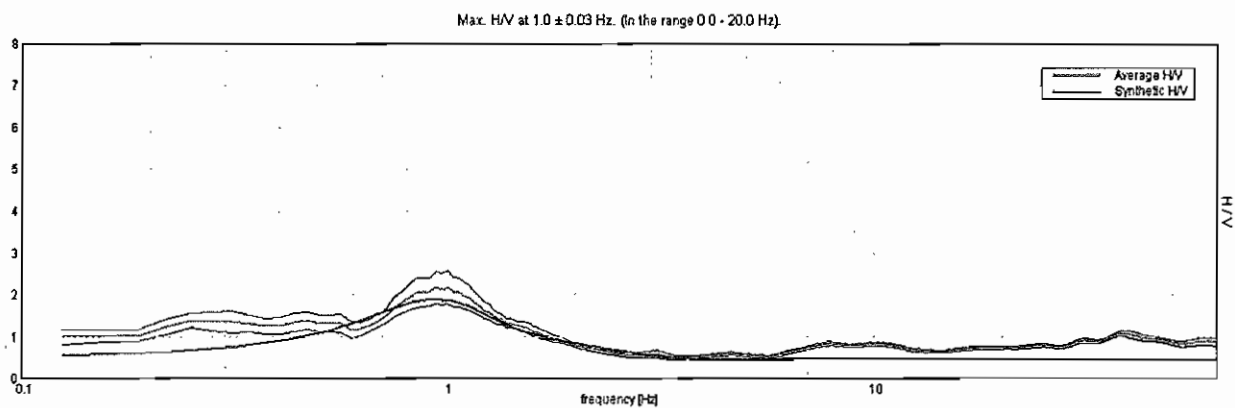

Depth at the bottom of the layer
[m]

Thickness [m]

Vs [m/s]

13.00

13.00

130

34.00

21.00

195

65.00

31.00

270

83.00

18.00


320

inf.

inf.

385

Vs(0.0-30.0)=160m/s

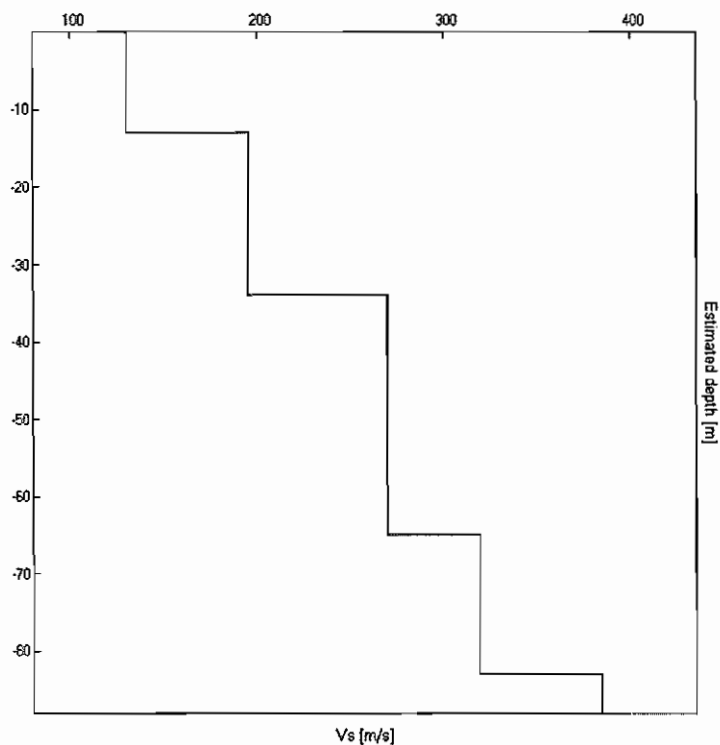

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 1.0 ± 0.03 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$1.00 > 0.50$	OK	
$n_c(f_0) > 200$	$1200.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 49 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	1.656 Hz	OK	
$A_0 > 2$	$2.17 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.01618 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.01618 < 0.1$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.1968 < 1.78$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA - n. 11


Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h20'00". Analyzed 95% trace (manual window selection)
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO
Max. H/V at 1.0 ± 0.02 Hz. (in the range 0.0 - 20.0 Hz).

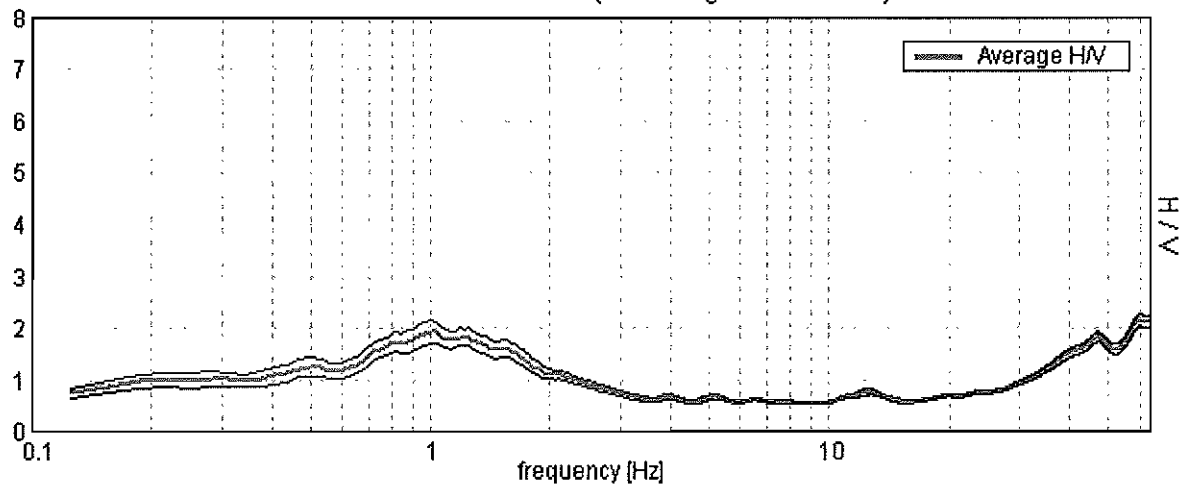


H/V TIME HISTORY

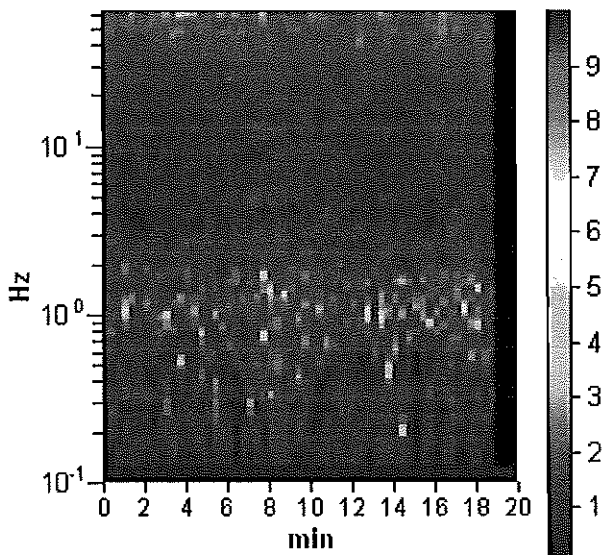

DIRECTIONAL H/V

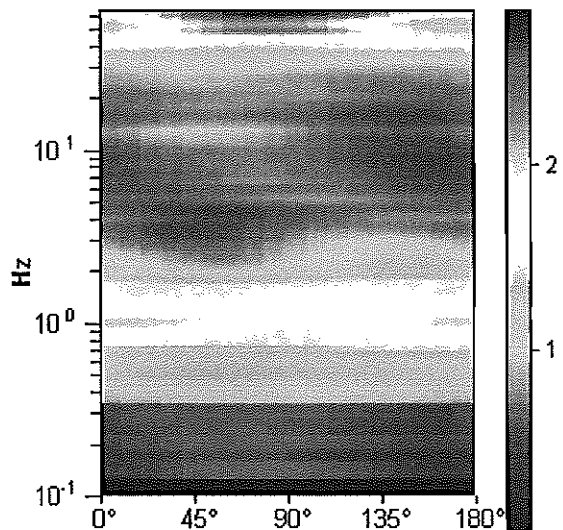


SINGLE COMPONENT SPECTRA

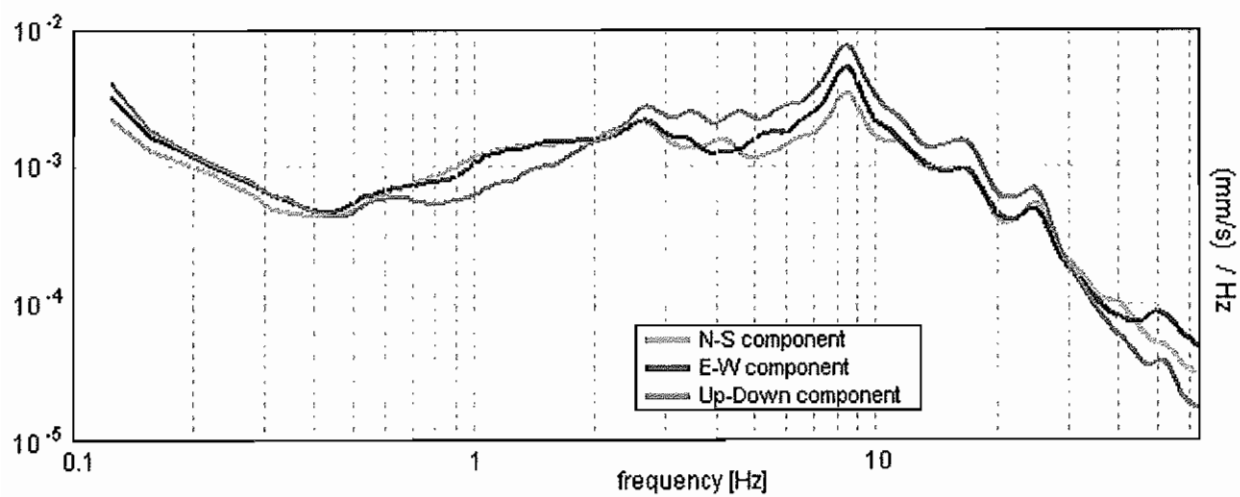

EXPERIMENTAL VS. SYNTHETIC H/V

Max. H/V at 1.0 ± 0.02 Hz. (in the range 0.0 - 20.0 Hz).

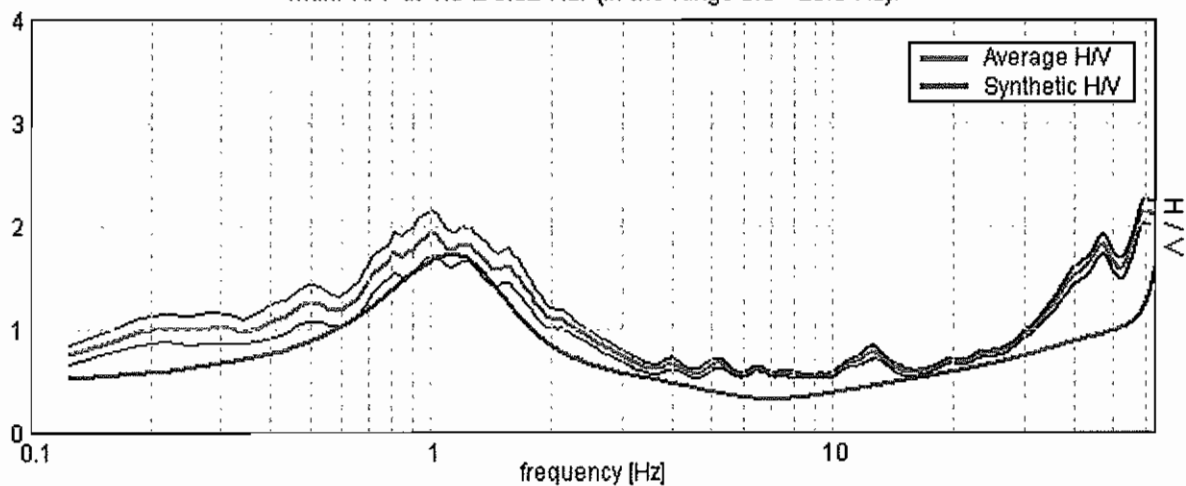

Depth at the bottom of the layer
[m]

Thickness [m]

Vs [m/s]

0.30

0.30

80

1.50

1.20

200

6.50

5.00

120

15.50

9.00

180

23.50

8.00

200

33.50

10.00

230

53.50

20.00

290

73.50

20.00


330

inf.

inf.

390

Vs(0.0-30.0)=177m/s

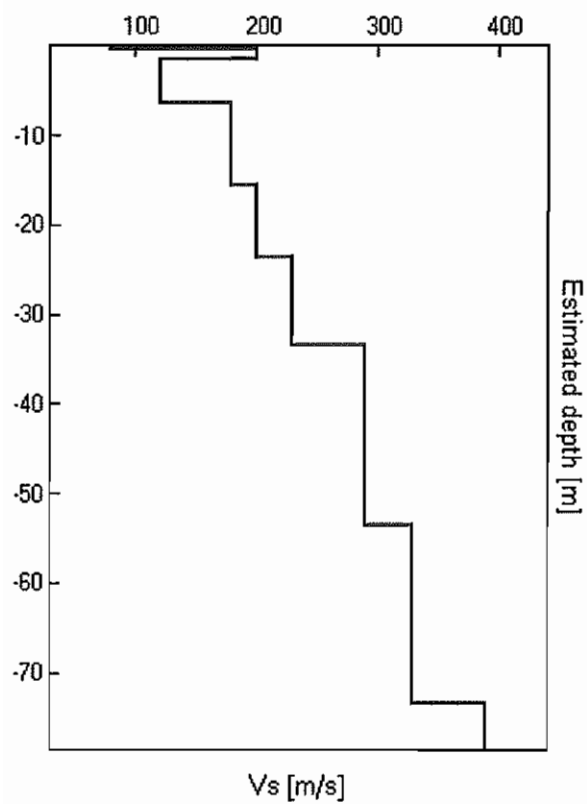

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 1.0 ± 0.02 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$1.00 > 0.50$	OK	
$n_c(f_0) > 200$	$1140.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 49 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	2.406 Hz	OK	
$A_0 > 2$	$1.94 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.01057 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.01057 < 0.1$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.1074 < 1.78$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$


Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


RAVENNA - n. 33

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available


Trace length: 0h20'00". Analysis performed on the entire trace.
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%

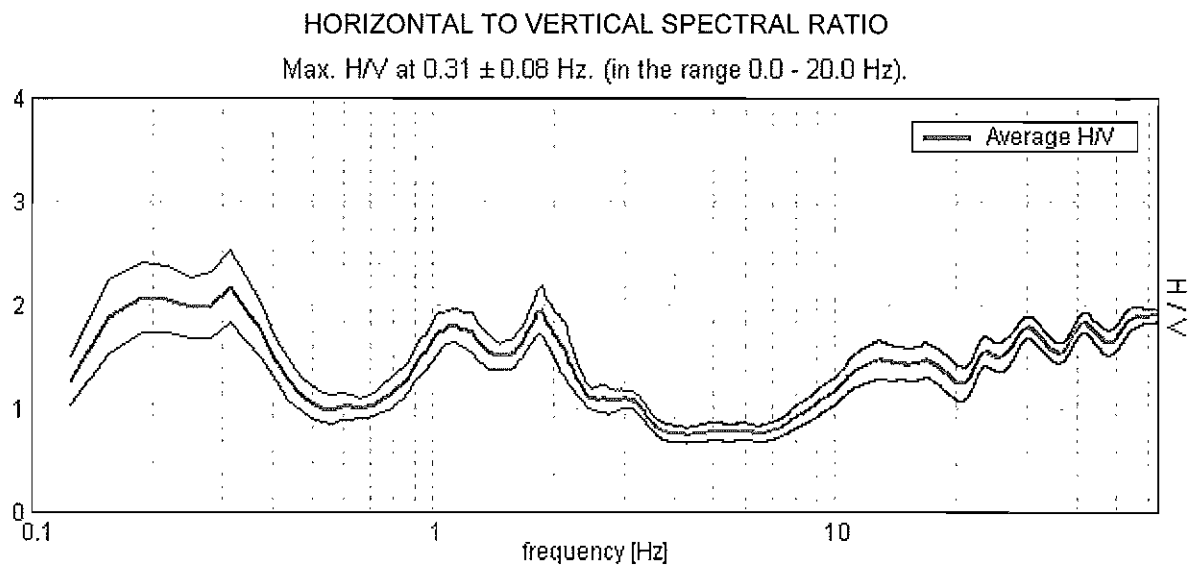


H/V TIME HISTORY

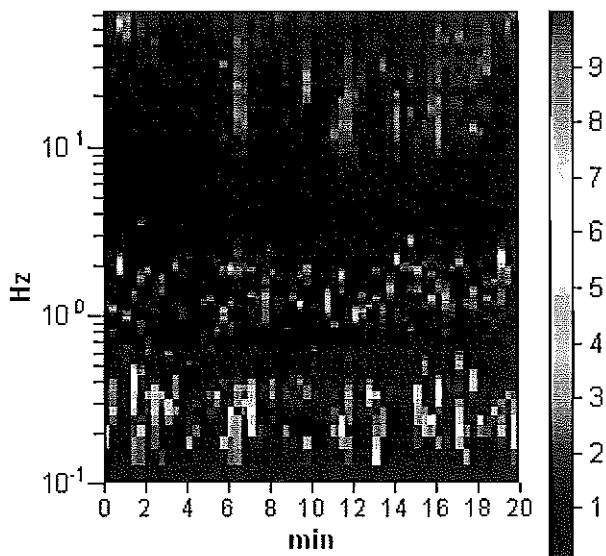

DIRECTIONAL H/V

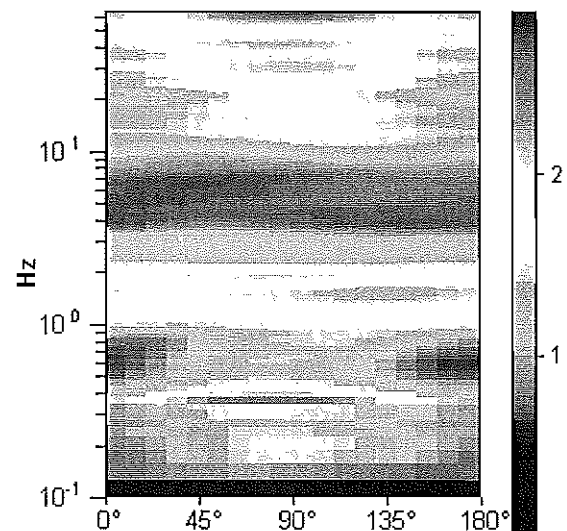


SINGLE COMPONENT SPECTRA

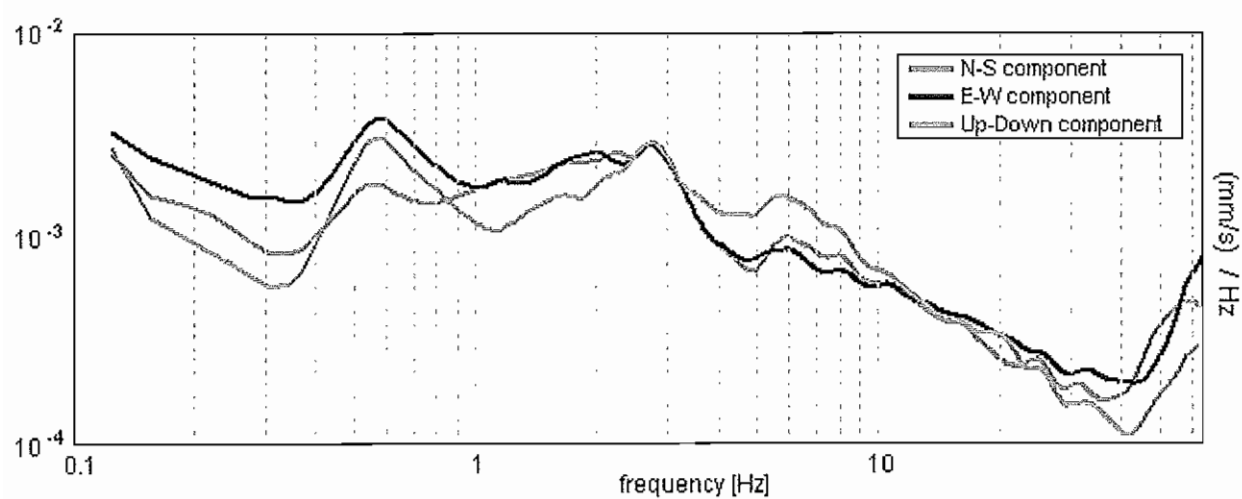

EXPERIMENTAL VS. SYNTHETIC H/V

Max. H/V at 0.31 ± 0.08 Hz. (in the range 0.0 - 20.0 Hz).

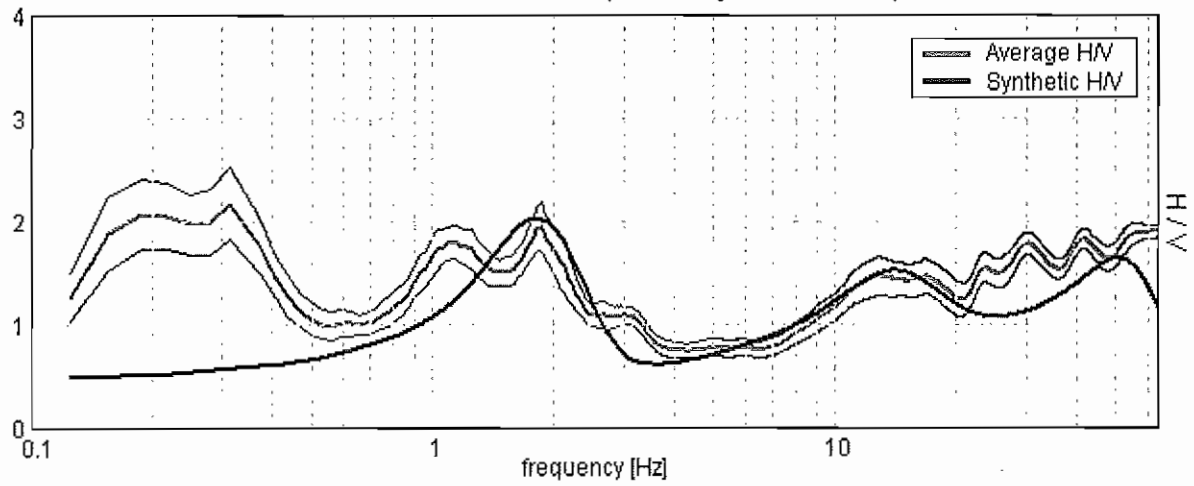


Depth at the bottom of the layer
[m]

Thickness [m]

Vs [m/s]

0.30	0.30	62
1.30	1.00	130
2.50	1.20	170
3.50	1.00	200
19.50	16.00	240
29.50	10.00	290
47.50	18.00	380
inf.	inf.	510

Vs(0.0-30.0)=236m/s

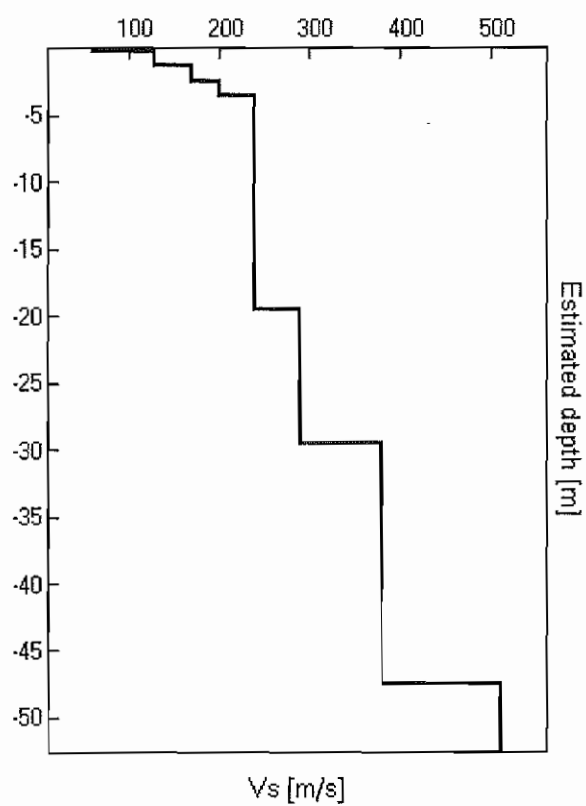

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 0.31 ± 0.08 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.31 > 0.50$		NO
$n_c(f_0) > 200$	$375.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 16 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	0.094 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	0.5 Hz	OK	
$A_0 > 2$	$2.18 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.12496 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.03905 < 0.0625$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.1743 < 2.5$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


RAVENNA – n. 36

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available


Trace length: 0h20'00". Analyzed 70% trace (manual window selection)
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 19.97 ± 2.15 Hz. (in the range 0.0 - 20.0 Hz)

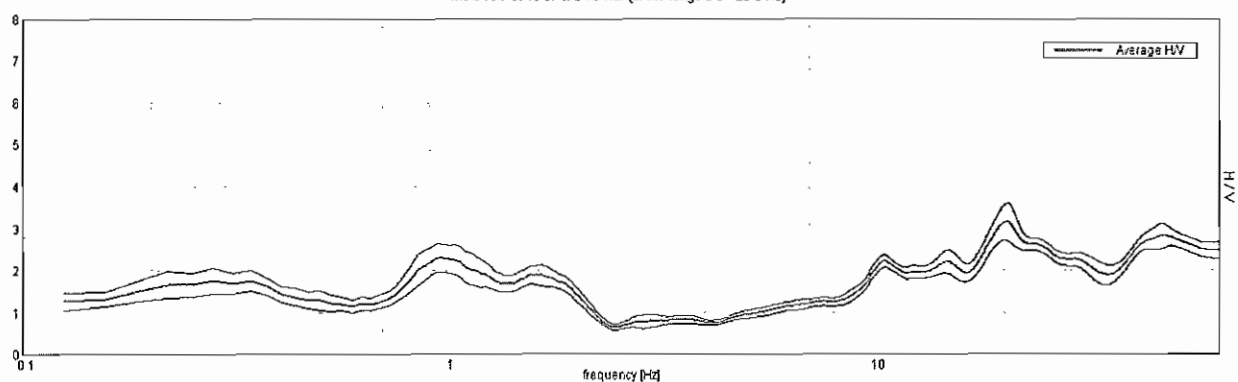


H/V TIME HISTORY

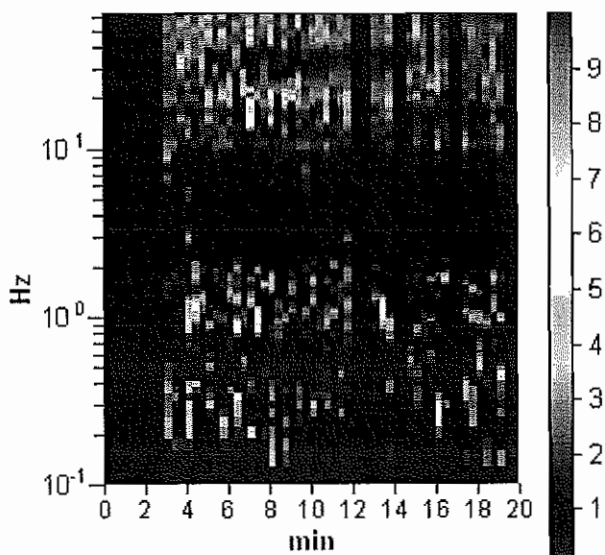


DIRECTIONAL H/V

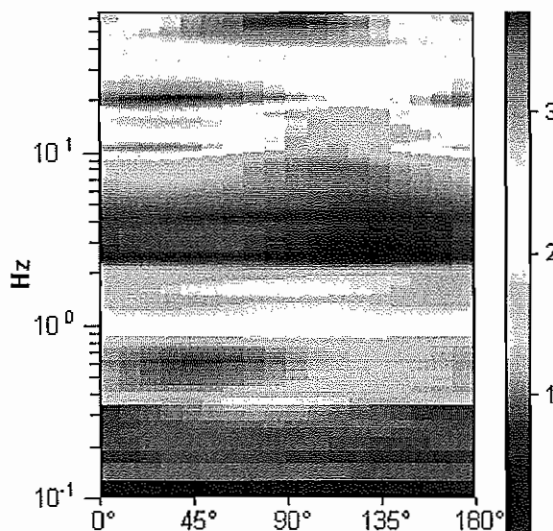

SINGLE COMPONENT SPECTRA

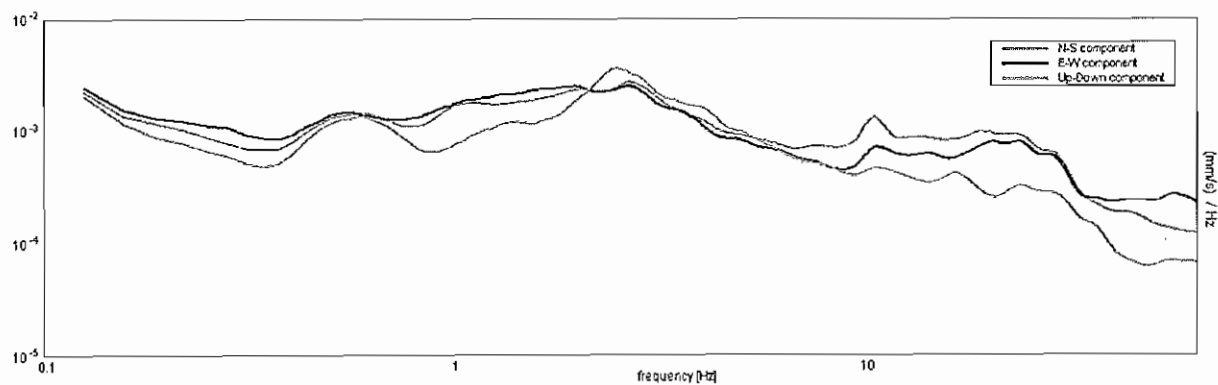

EXPERIMENTAL VS. SYNTHETIC H/V

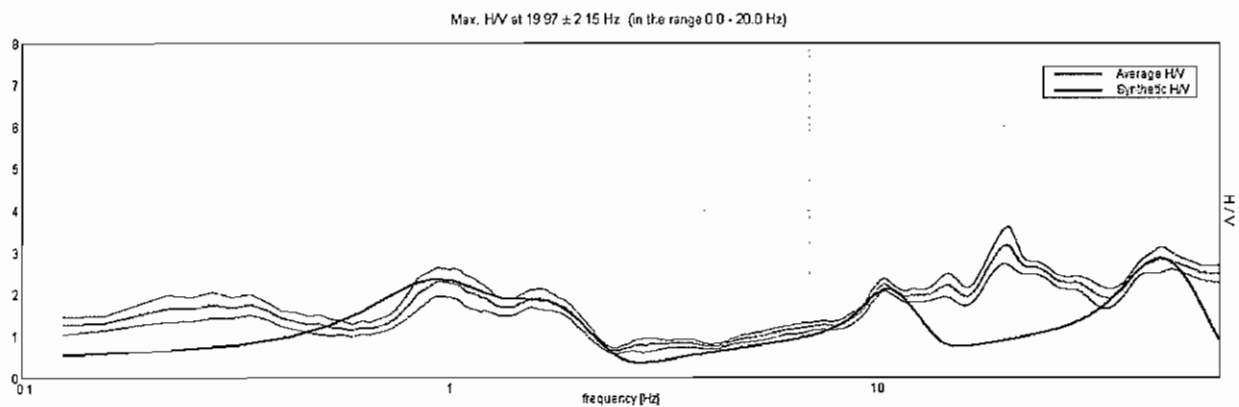

Depth at the bottom of the layer

Thickness [m]

Vs [m/s]

[m]

0.24

0.24

43

1.44

1.20

105

3.94

2.50

130

6.94

3.00

275

15.44

8.50

130

18.44

3.00

190

31.44

13.00

240

49.44

18.00

360

113.44

64.00


390

inf.

inf.

600

Vs(0.0-30.0)=170m/s

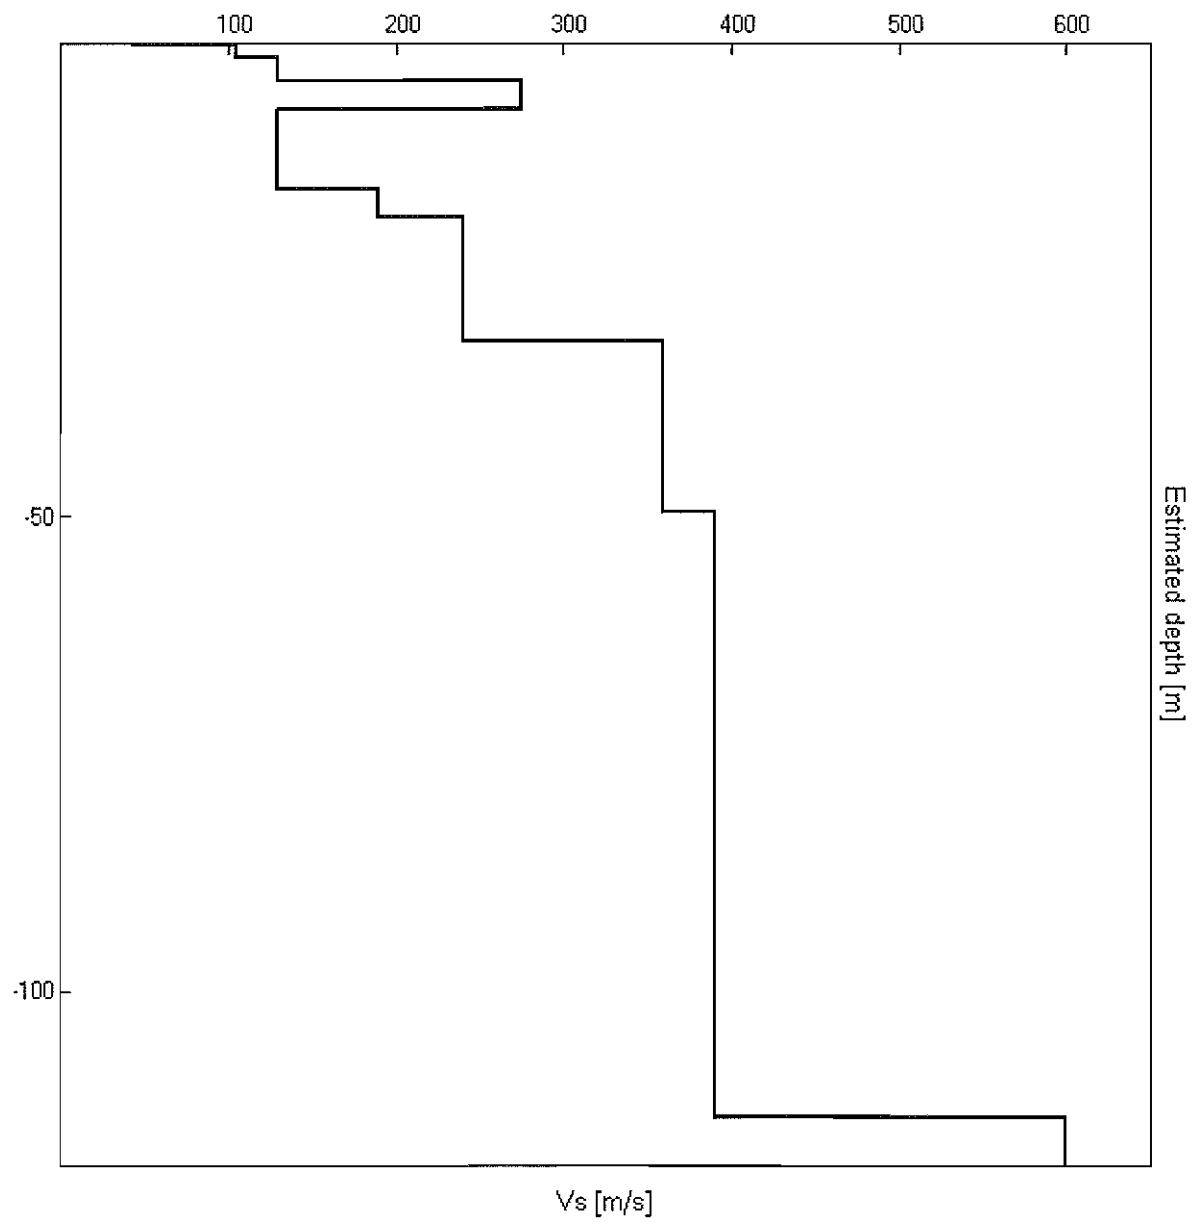

[According to the Sesame, 2005 guidelines. **Please read carefully the Grilla manual before interpreting the following tables.**]

Max. H/V at 19.97 ± 2.15 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$19.97 > 0.50$	OK	
$n_c(f_0) > 200$	$16773.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 960 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	9.219 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$3.13 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.05262 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$1.05066 < 0.99844$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.2038 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA - n. 16


Start recording: 19/10/10 16:21:55 End recording: 19/10/10 16:41:55
Channel labels: NORTH SOUTH; EAST WEST; UP DOWN
GPS data not available

Trace length: 0h20'00". Analysis performed on the entire trace.
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

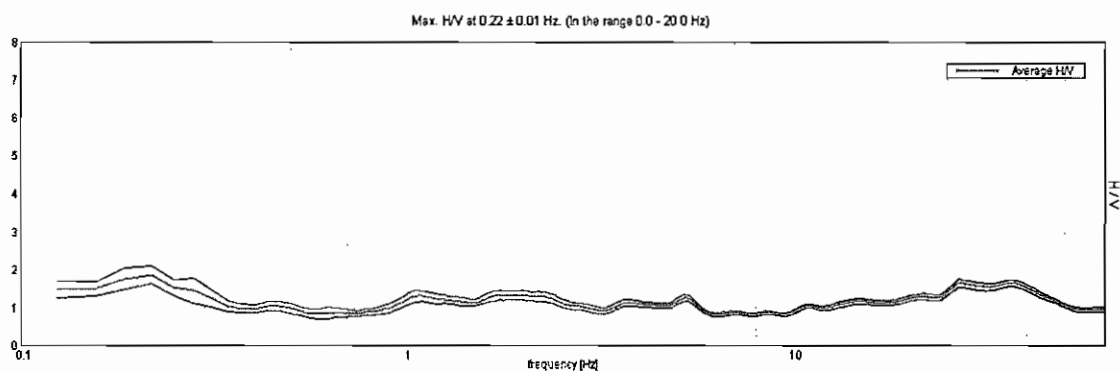


H/V TIME HISTORY

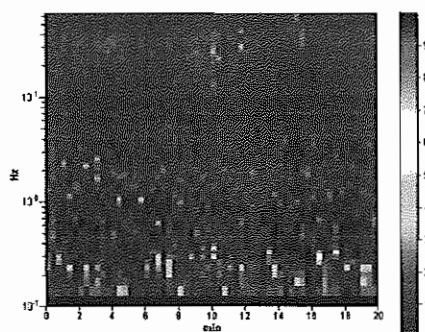


DIRECTIONAL HV

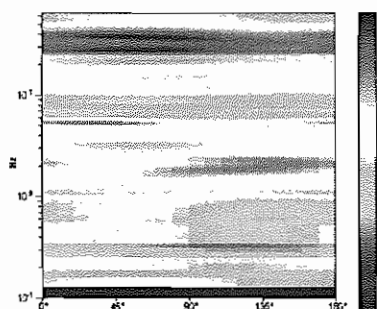

SINGLE COMPONENT SPECTRA

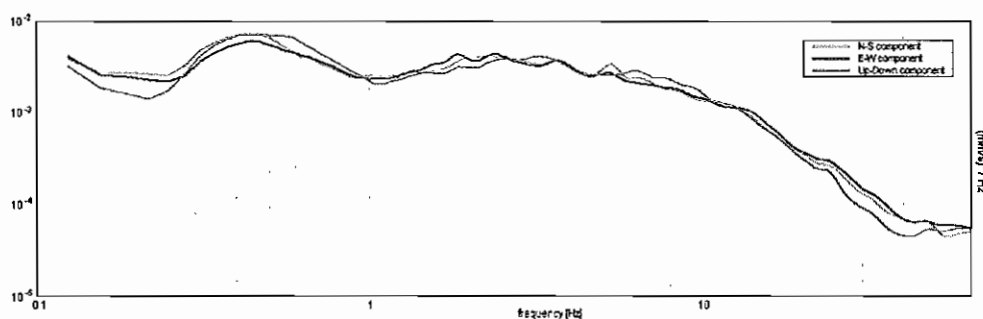

EXPERIMENTAL VS. SYNTHETIC H/V

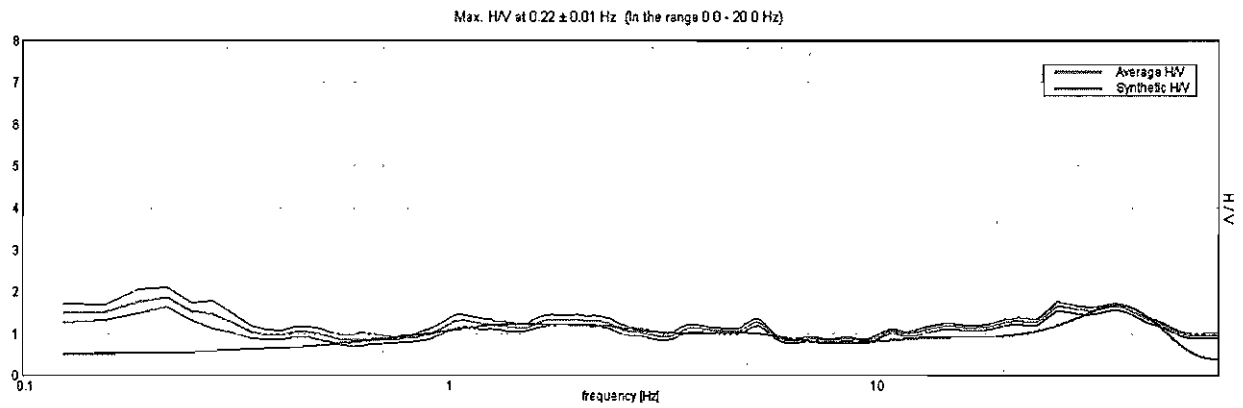

Depth at the bottom of the layer

Thickness [m]

Vs [m/s]

[m]

0.40

0.40

60

2.40

2.00

120

8.40

6.00

160

27.40

19.00

240

70.40

43.00


340

inf.

inf.

410

Vs(0.0-30.0)=203m/s

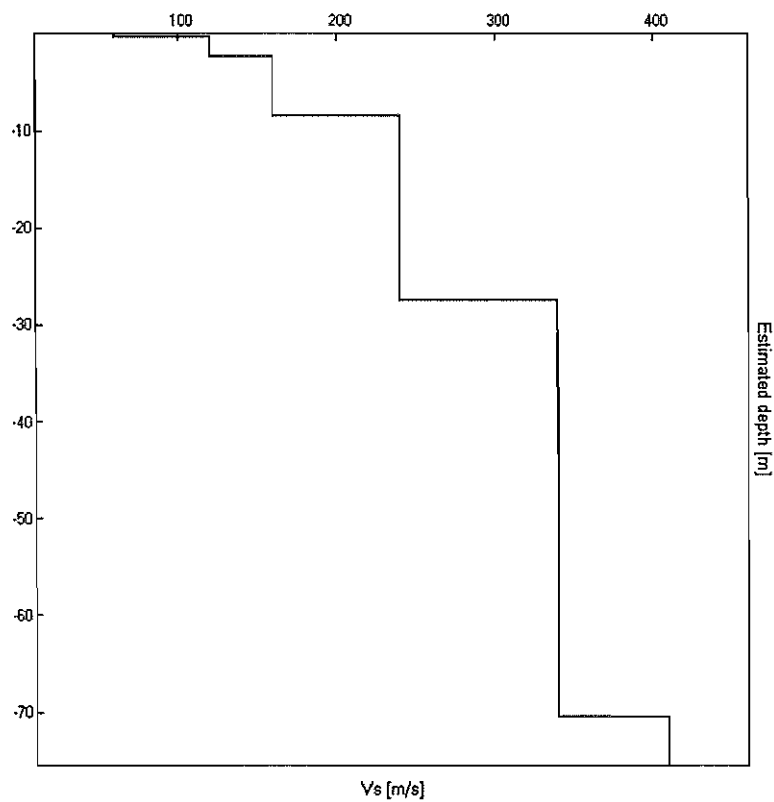

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 0.22 ± 0.01 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.22 > 0.50$		NO
$n_c(f_0) > 200$	$262.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 12 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	0.094 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	0.531 Hz	OK	
$A_0 > 2$	$1.86 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.02662 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.00582 < 0.04375$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.1155 < 2.5$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq.range [Hz]	< 0.2	0.2 - 0.5	0.5 - 1.0	1.0 - 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
$\log \theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 15


Start recording: 22/06/10 16:53:55 End recording: 22/06/10 17:13:56
Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h20'00". Analysis performed on the entire trace.
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

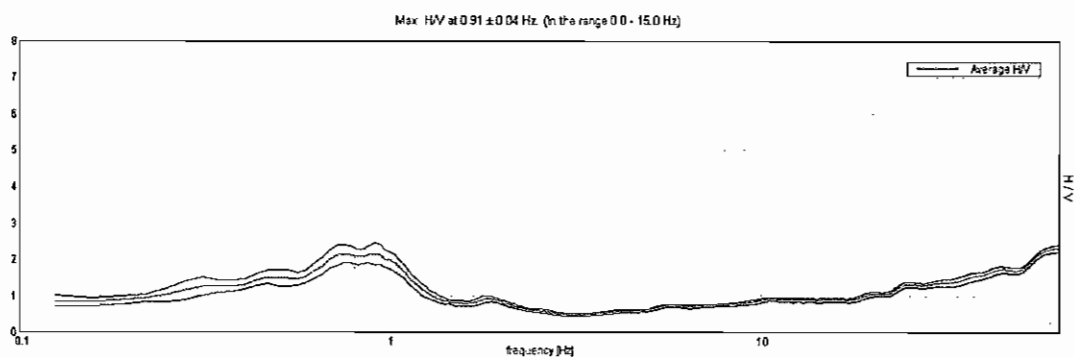


H/V TIME HISTORY

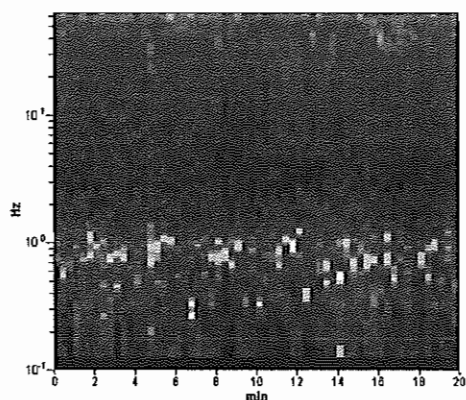


DIRECTIONAL H/V

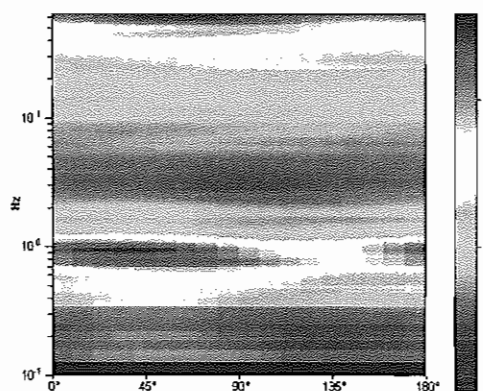

SINGLE COMPONENT SPECTRA

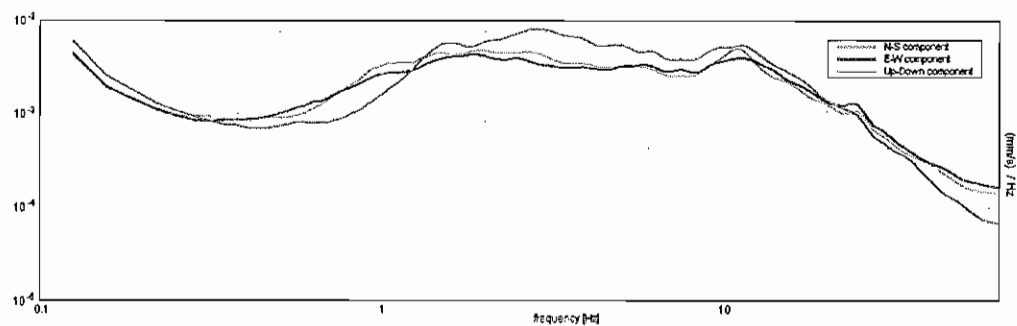

EXPERIMENTAL VS. SYNTHETIC H/V

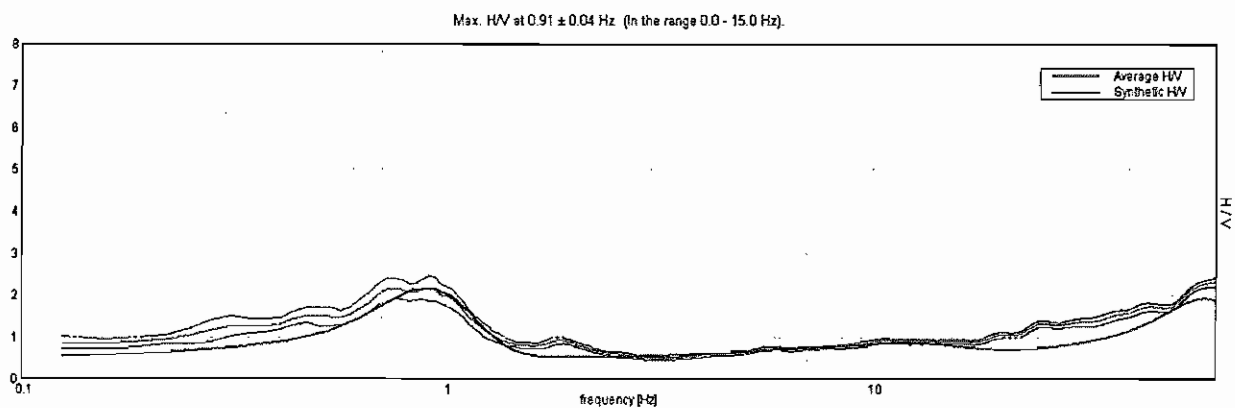

Depth at the bottom of the layer
[m]

Thickness [m]


Vs [m/s]

0.30
3.00
13.00
31.00
76.00
inf.

0.30
2.70
10.00
18.00
45.00
inf.

75
160
220
200
280
490

Vs(0.0-30.0)=198m/s

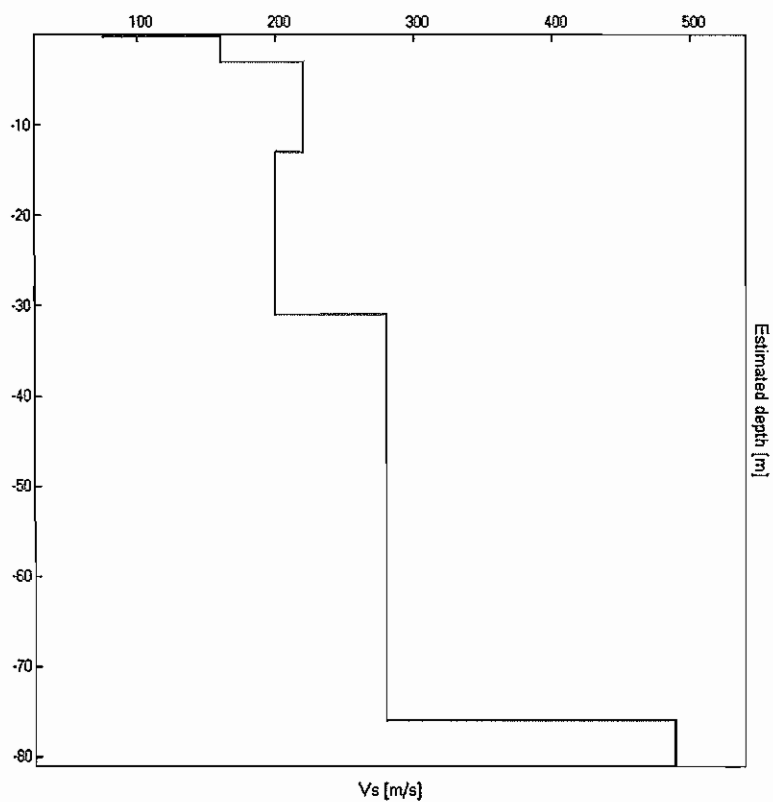

[According to the Sesame, 2005 guidelines. **Please read carefully the Grilla manual before interpreting the following tables.**]

Max. H/V at 0.91 ± 0.04 Hz. (in the range 0.0 - 15.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.91 > 0.50$	OK	
$n_c(f_0) > 200$	$1087.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 44 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	0.25 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	1.281 Hz	OK	
$A_0 > 2$	$2.15 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.02048 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.01856 < 0.13594$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.148 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 19

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h16'00". Analysis performed on the entire trace.

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 31.78 ± 2.84 Hz (in the range 0.0 - 64.0 Hz).

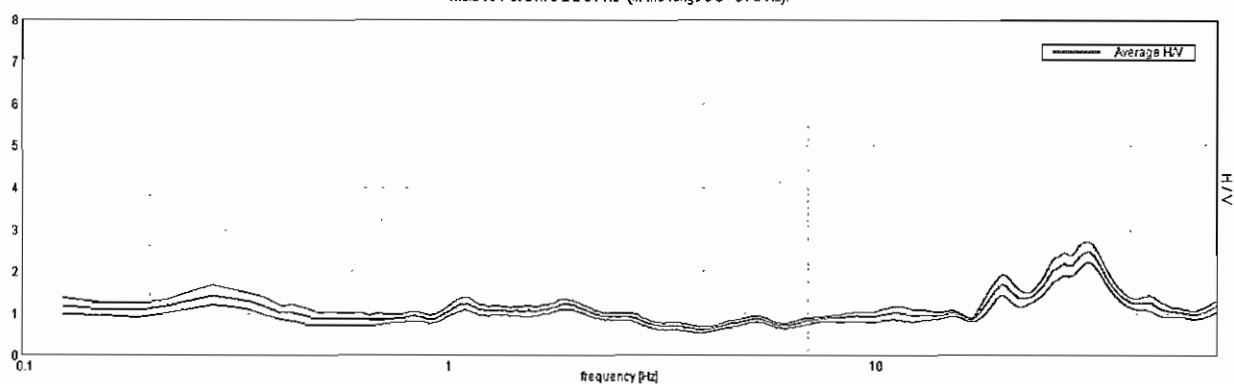


H/V TIME HISTORY

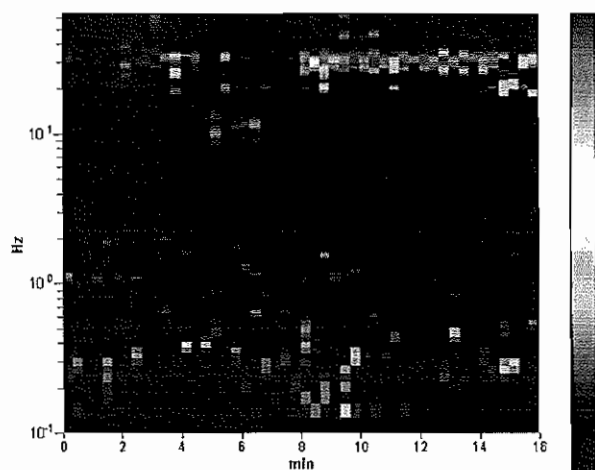


DIRECTIONAL H/V

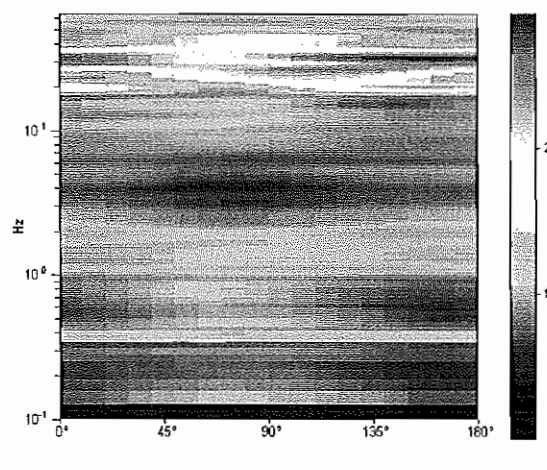

SINGLE COMPONENT SPECTRA

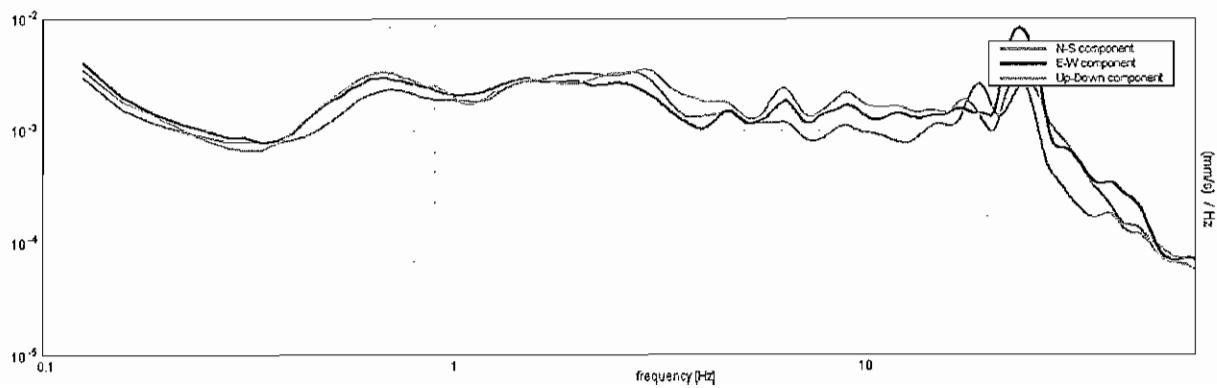

EXPERIMENTAL VS. SYNTHETIC H/V

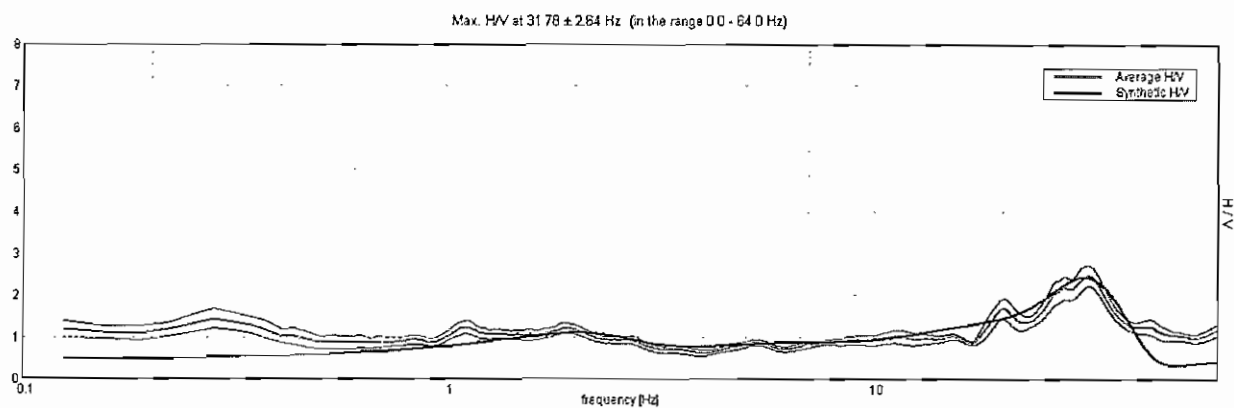


Depth at the bottom of the layer
[m]

Thickness [m]

Vs [m/s]

0.50	0.50	60
2.50	2.00	140
8.50	6.00	180
26.50	18.00	230
inf.	inf.	330

Vs(0.0-30.0)=207m/s

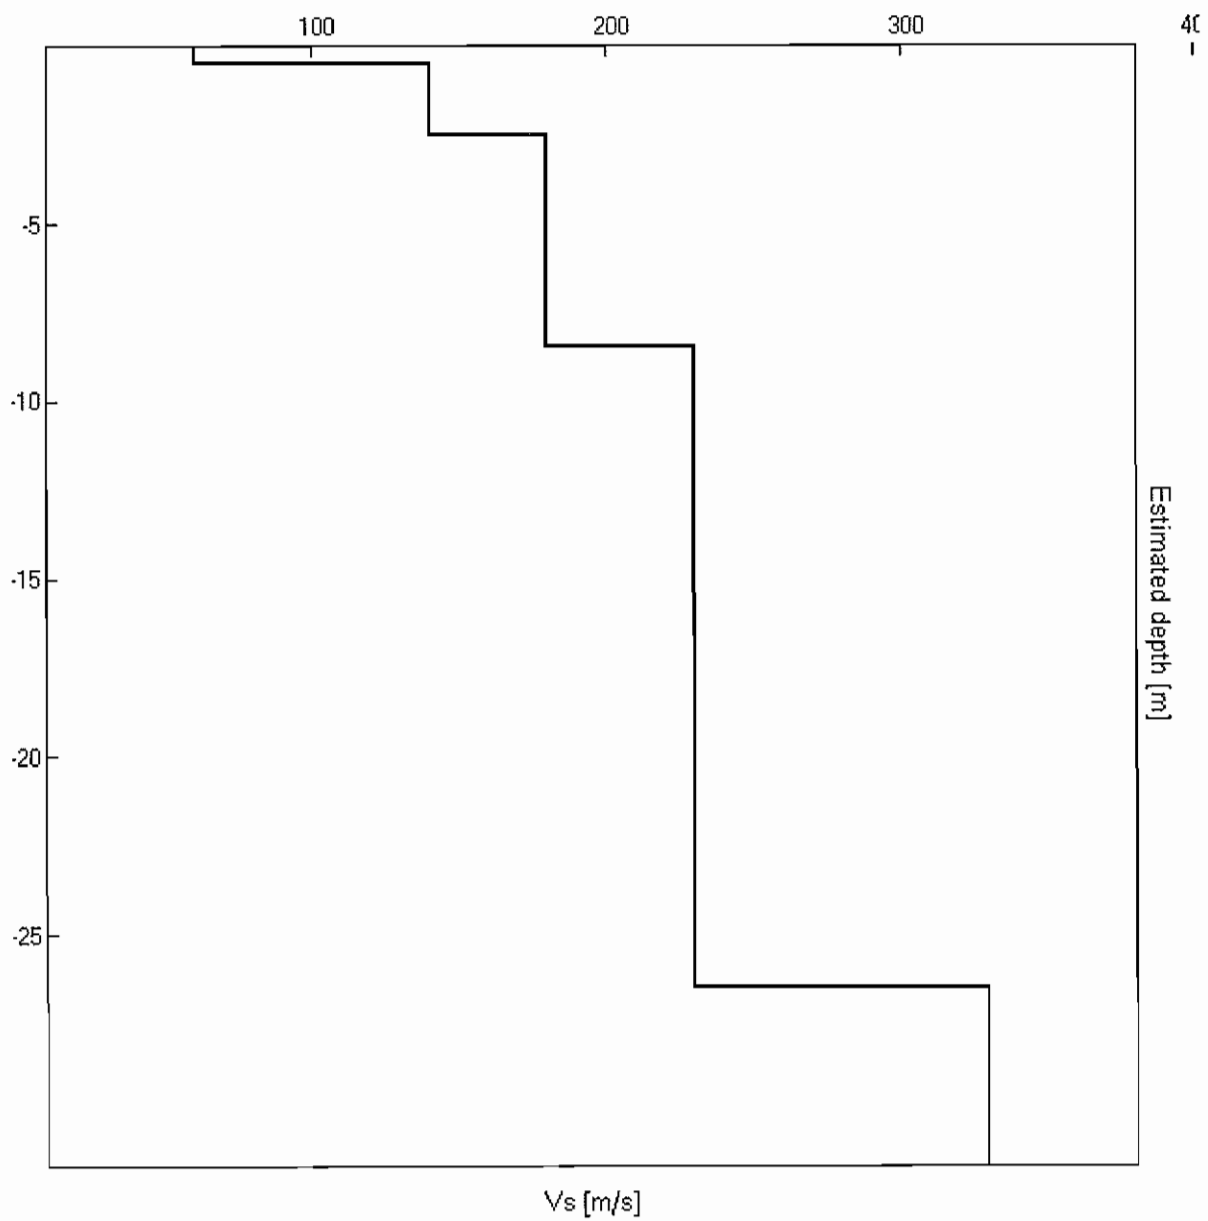

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 31.78 ± 2.64 Hz. (in the range 0.0 - 64.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$31.78 > 0.50$	OK	
$n_c(f_0) > 200$	$30510.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 1526 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	18.375 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	41.188 Hz	OK	
$A_0 > 2$	$2.48 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.04092 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$1.30049 < 1.58906$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.122 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 21

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available

Trace length: 0h20'00". Analyzed 83% trace (manual window selection)

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 4.59 ± 0.82 Hz. (in the range 0.0 - 20.0 Hz)

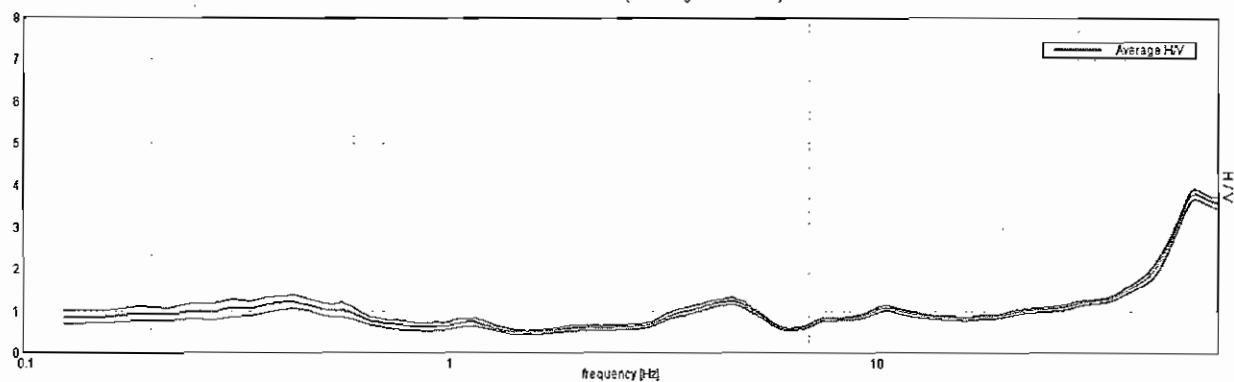


H/V TIME HISTORY

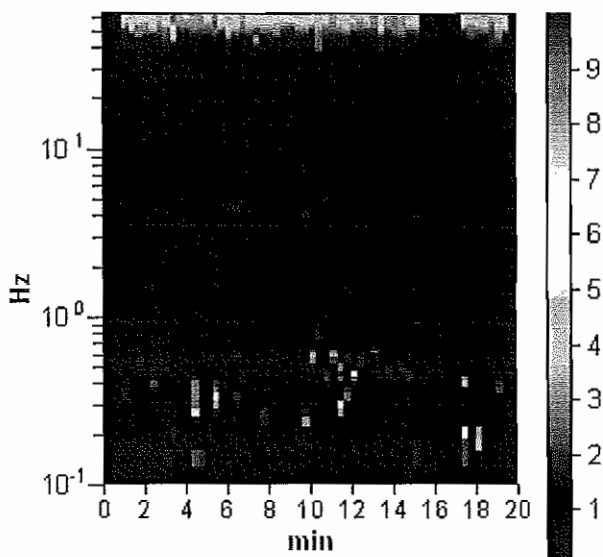


DIRECTIONAL H/V

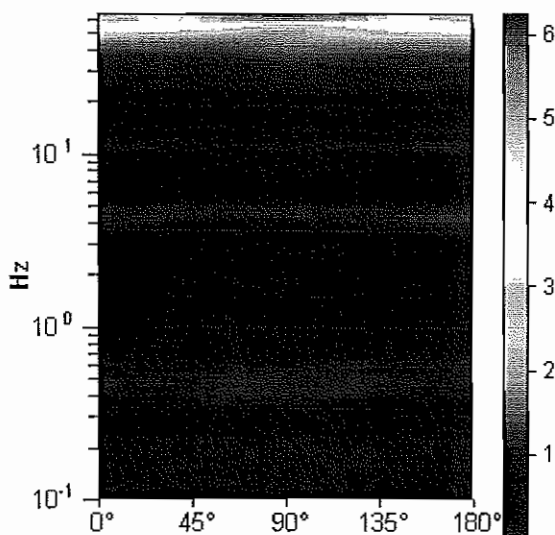

SINGLE COMPONENT SPECTRA

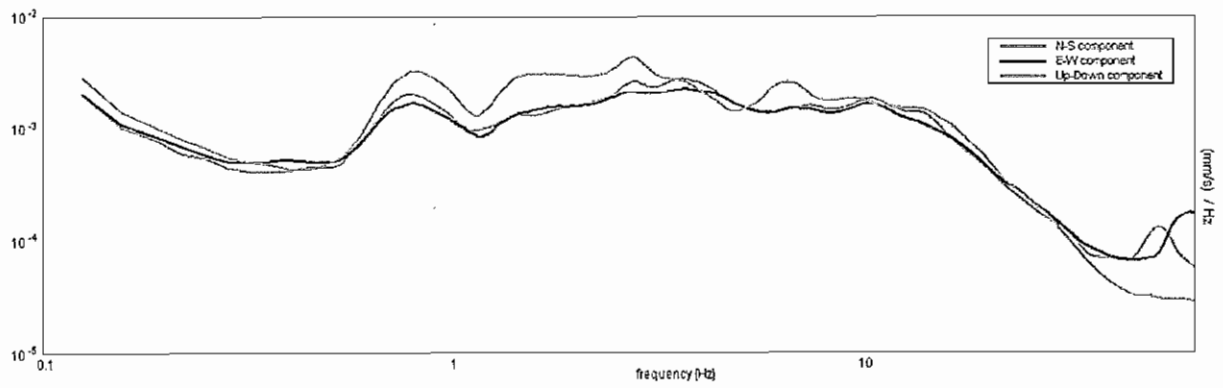

EXPERIMENTAL VS. SYNTHETIC H/V

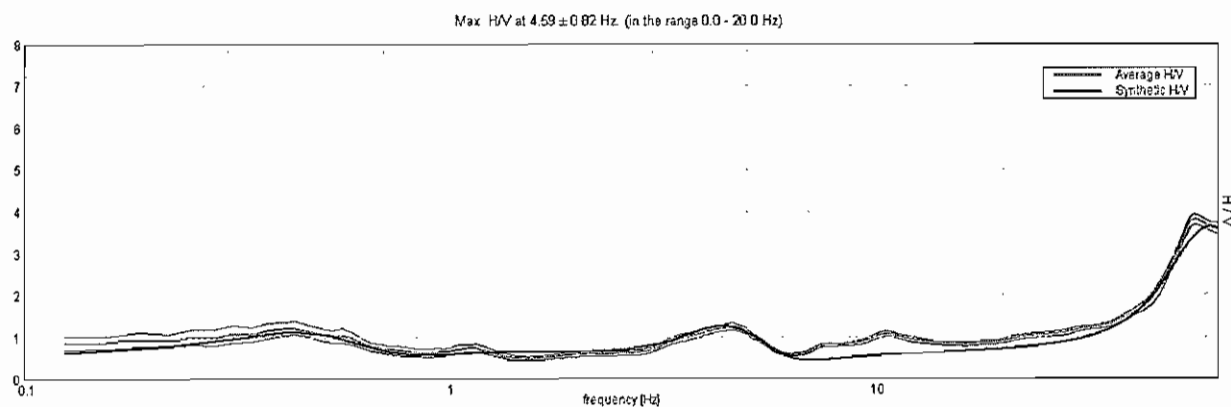

Depth at the bottom of the layer

Thickness [m]

Vs [m/s]

[m]

0.22

0.22

52

8.62

8.40

130

12.62

4.00

390

32.62

20.00

210

147.62

115.00


290

inf.

inf.

460

Vs(0.0-30.0)=185m/s

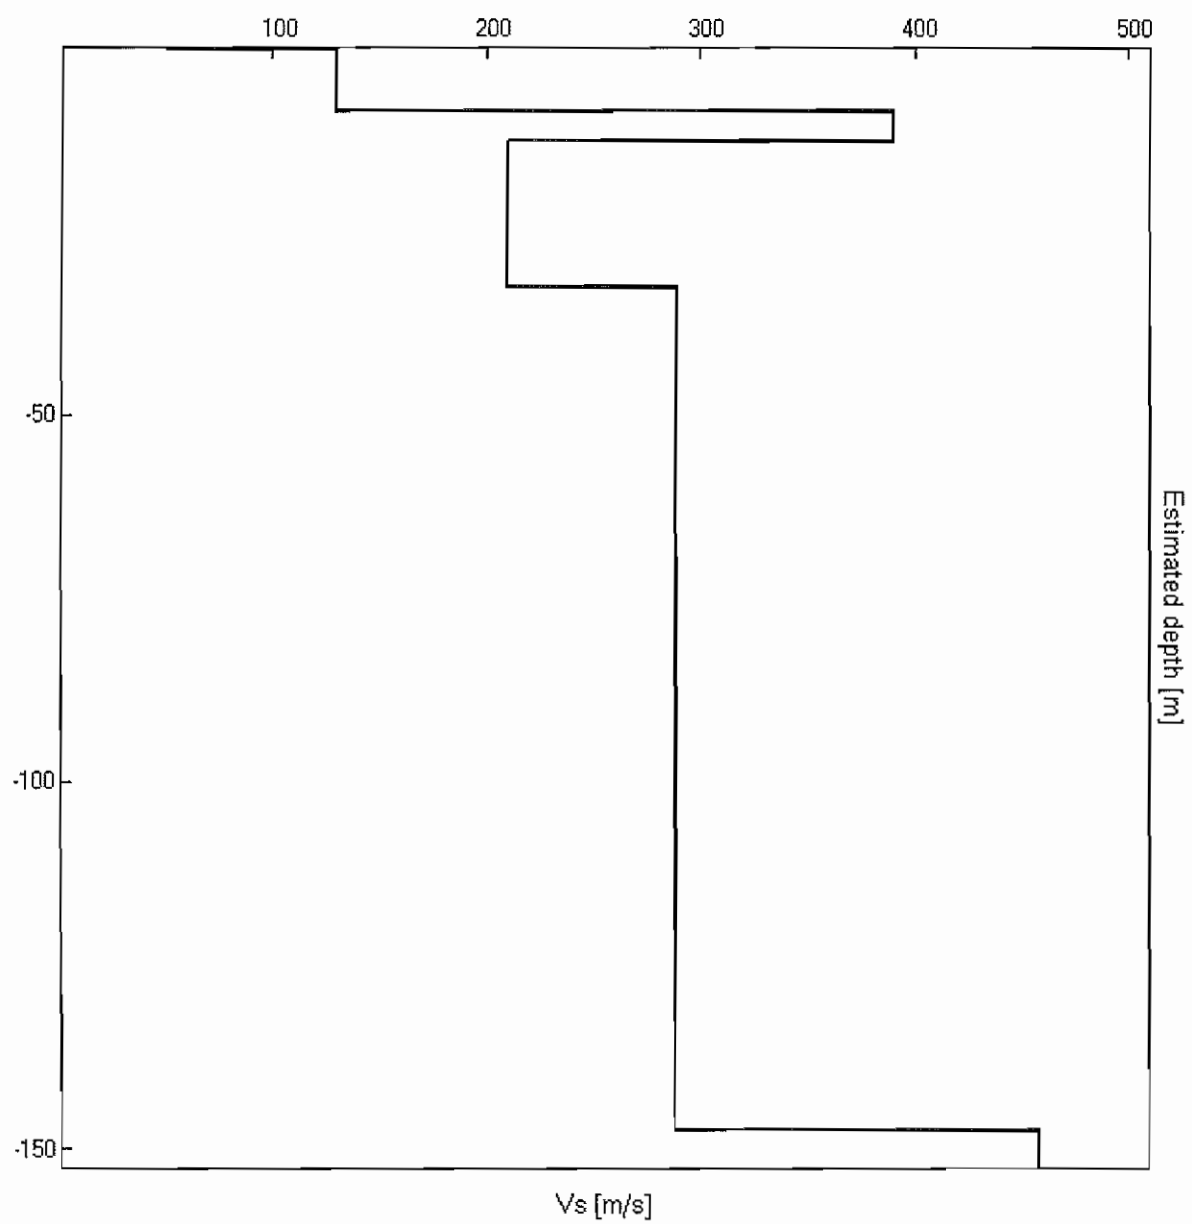

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 4.59 ± 0.82 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$4.59 > 0.50$	OK	
$n_c(f_0) > 200$	$4593.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 222 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	2.563 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	5.969 Hz	OK	
$A_0 > 2$	$1.25 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.08754 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.40213 < 0.22969$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.0389 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


RAVENNA – n. 20

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available


Trace length: 0h16'00". Analyzed 75% trace (manual window selection)
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 5%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 2.25 ± 1.83 Hz (in the range 0.0 - 64.0 Hz)

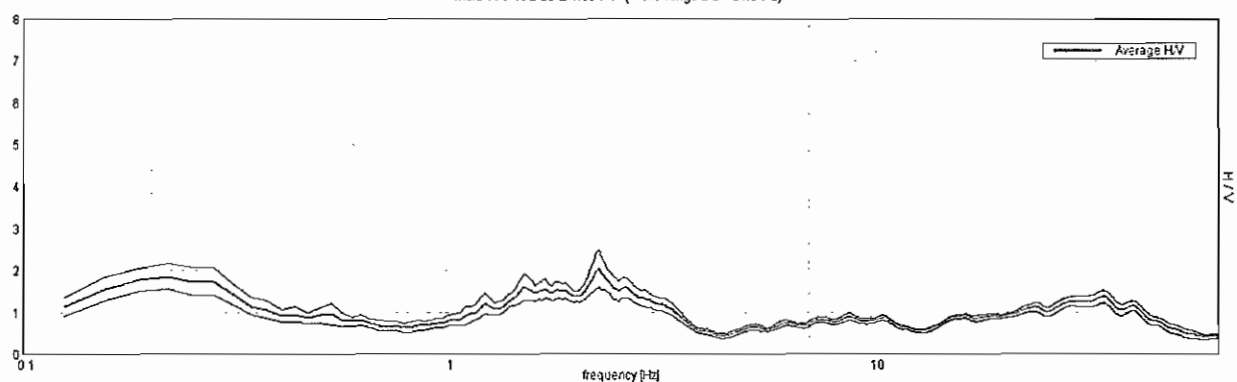


H/V TIME HISTORY

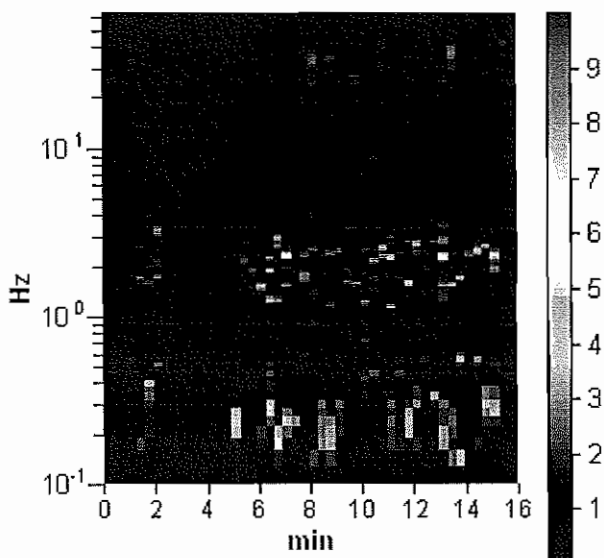


DIRECTIONAL H/V

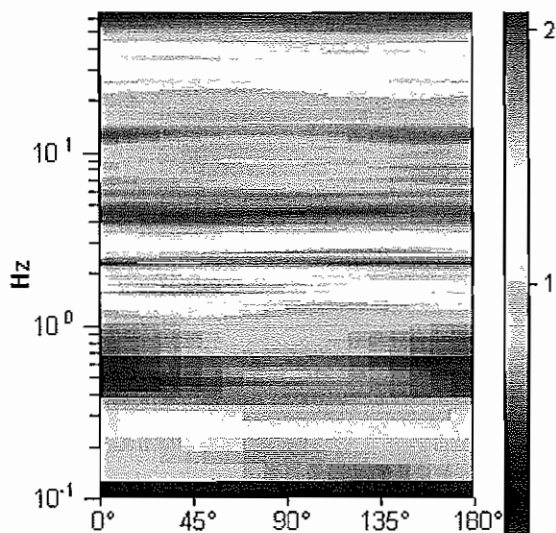

SINGLE COMPONENT SPECTRA

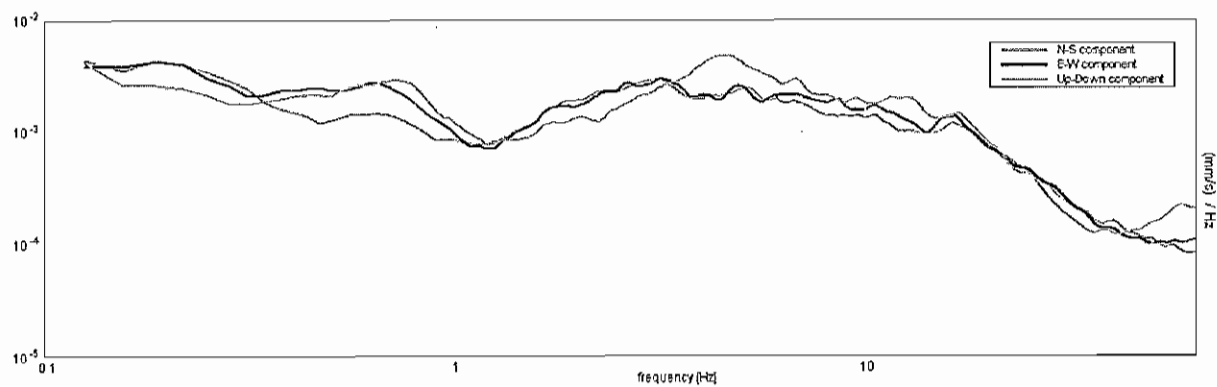

EXPERIMENTAL VS. SYNTHETIC H/V

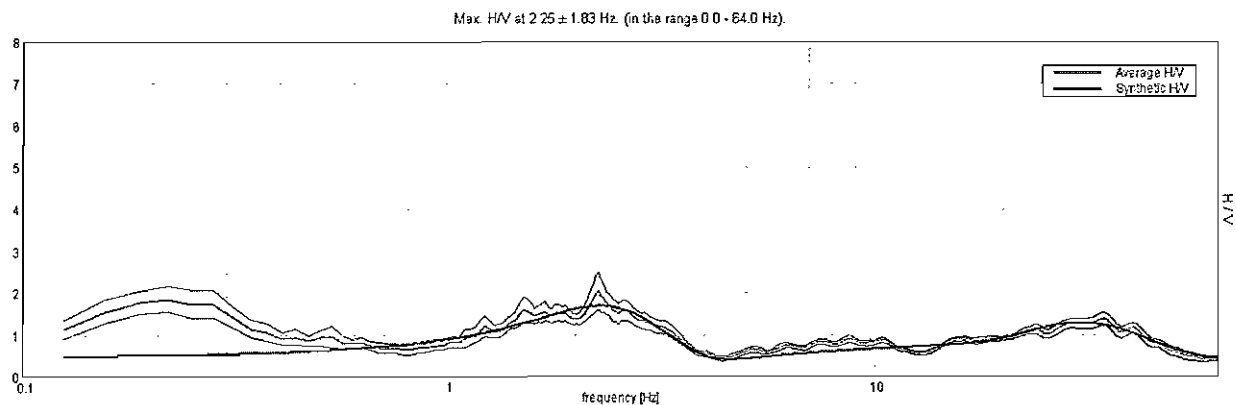

Depth at the bottom of the layer
[m]

Thickness [m]


Vs [m/s]

0.45
0.95
3.95
11.95
21.95
36.95
inf.

0.45
0.50
3.00
8.00
10.00
15.00
inf.

75
125
145
130
255
260
310

$V_s(2.0-32.0)=196\text{m/s}$

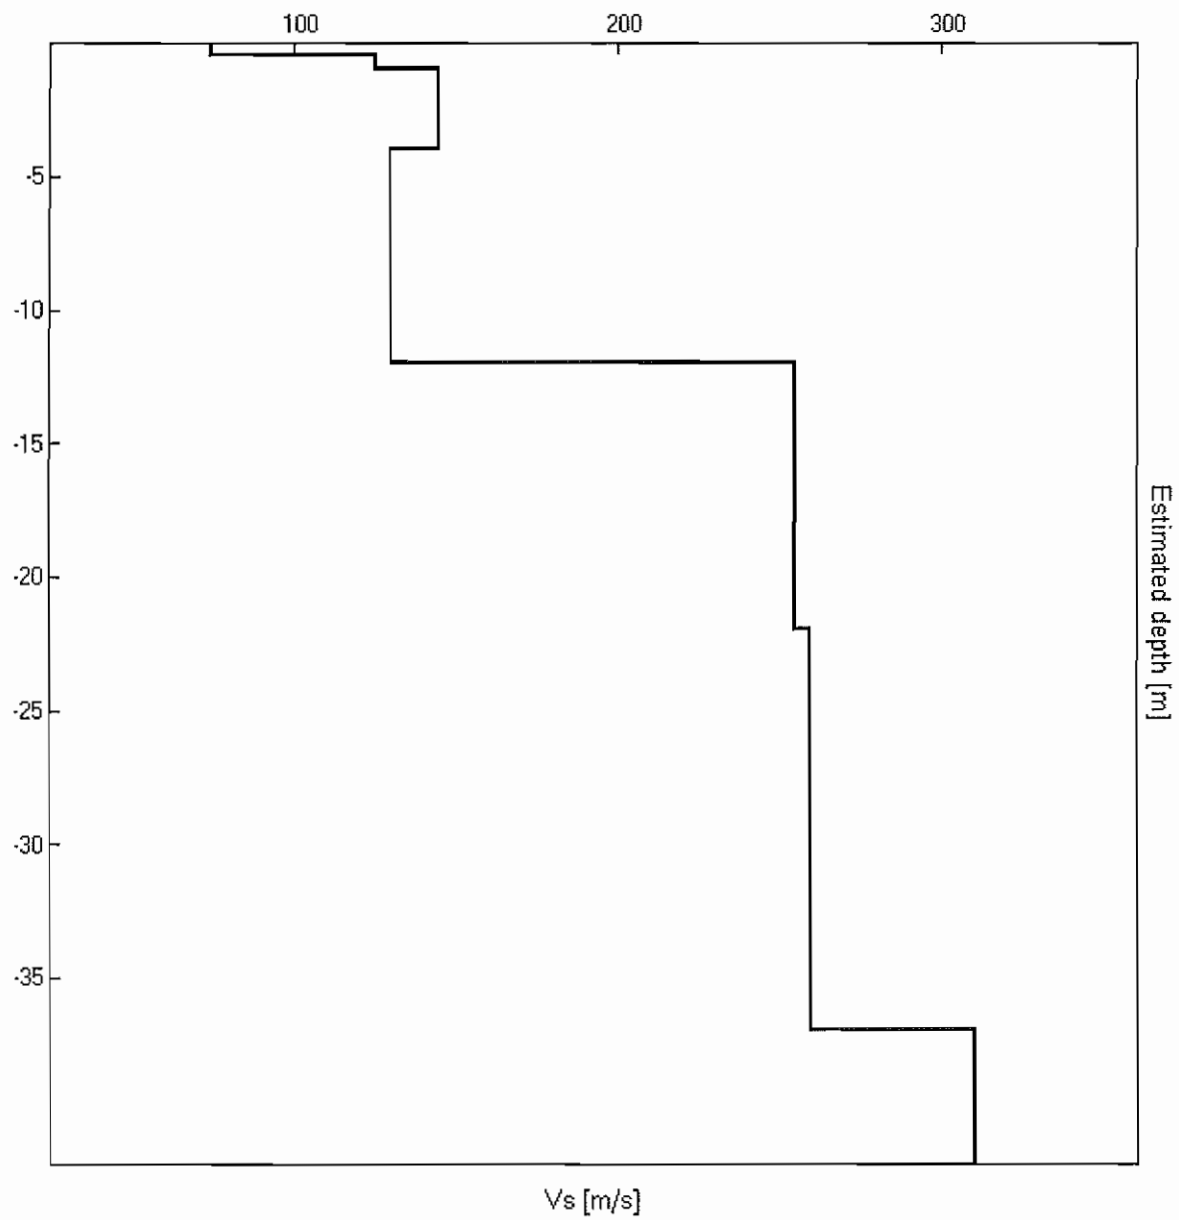

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 2.25 ± 1.83 Hz. (in the range 0.0 - 64.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$2.25 > 0.50$	OK	
$n_c(f_0) > 200$	$1620.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 109 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	1.156 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	3.406 Hz	OK	
$A_0 > 2$	$2.06 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.39422 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.887 < 0.1125$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.2135 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


RAVENNA – n. 34

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available


Trace length: 0h20'00". Analyzed 88% trace (manual window selection)
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max H/V at 29.0 ± 4.06 Hz (in the range 0.0 - 64.0 Hz)

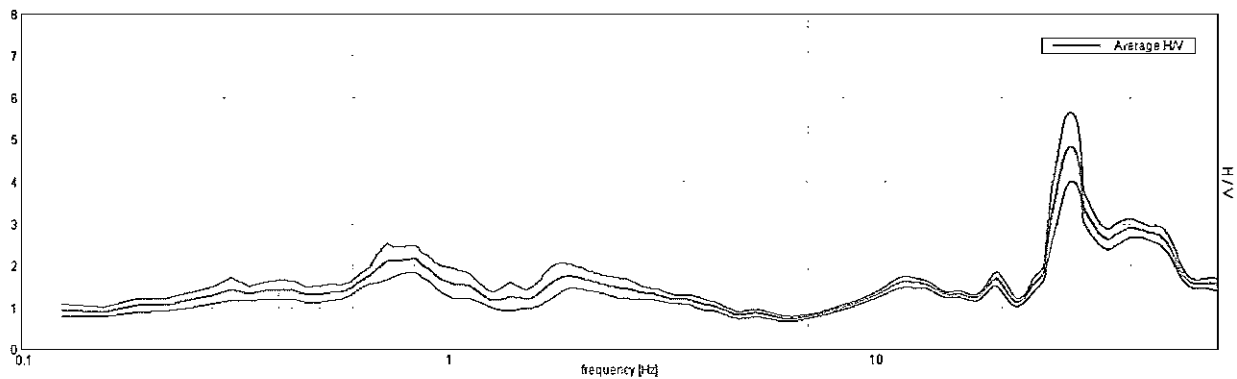


H/V TIME HISTORY

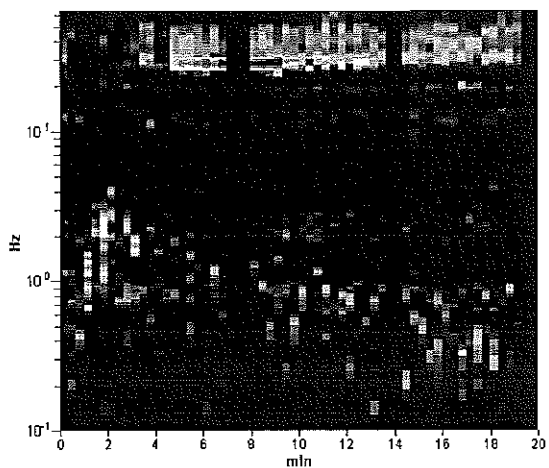


DIRECTIONAL H/V

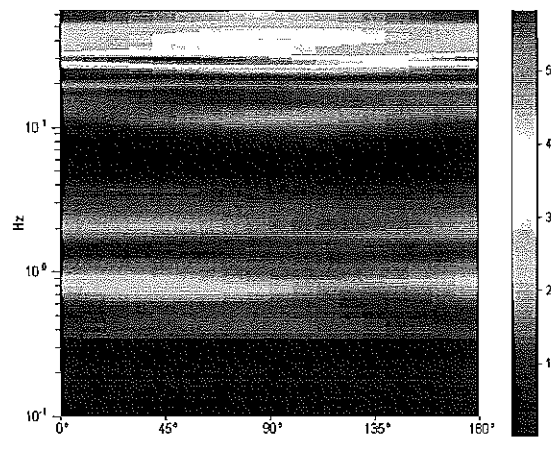

SINGLE COMPONENT SPECTRA

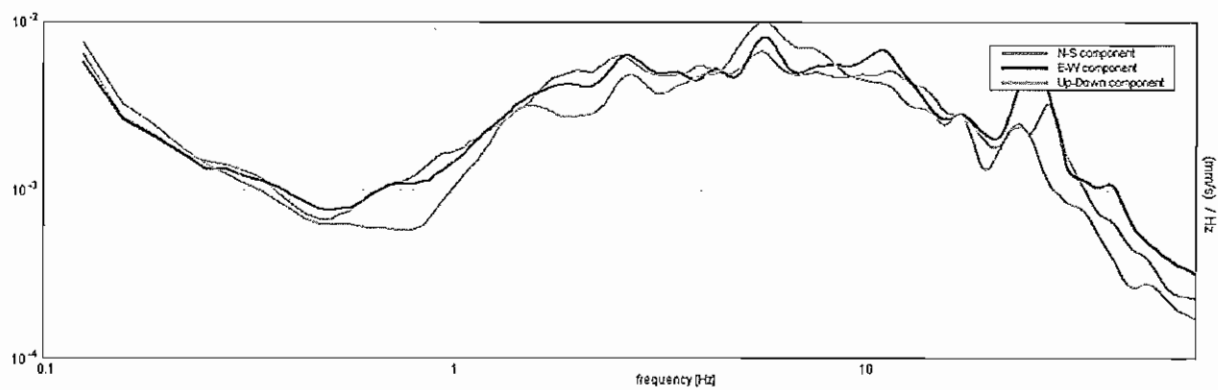

EXPERIMENTAL VS. SYNTHETIC H/V

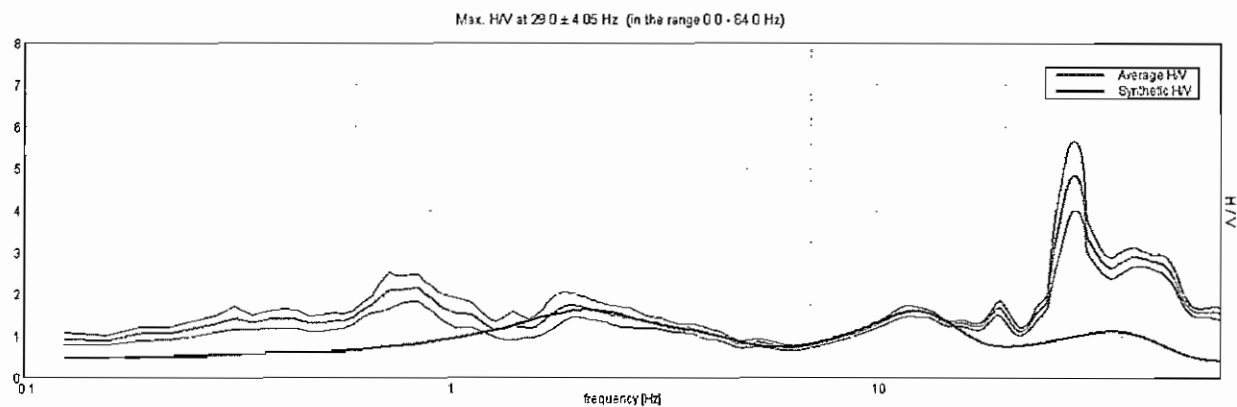

Depth at the bottom of the layer

Thickness [m]

Vs [m/s]

[m]

0.30

0.30

45

1.70

1.40

80

4.60

2.90

140

8.10

3.50

120

20.10

12.00

205

29.10

9.00


230

inf.

inf.

300

Vs(0.0-30.0)=172m/s

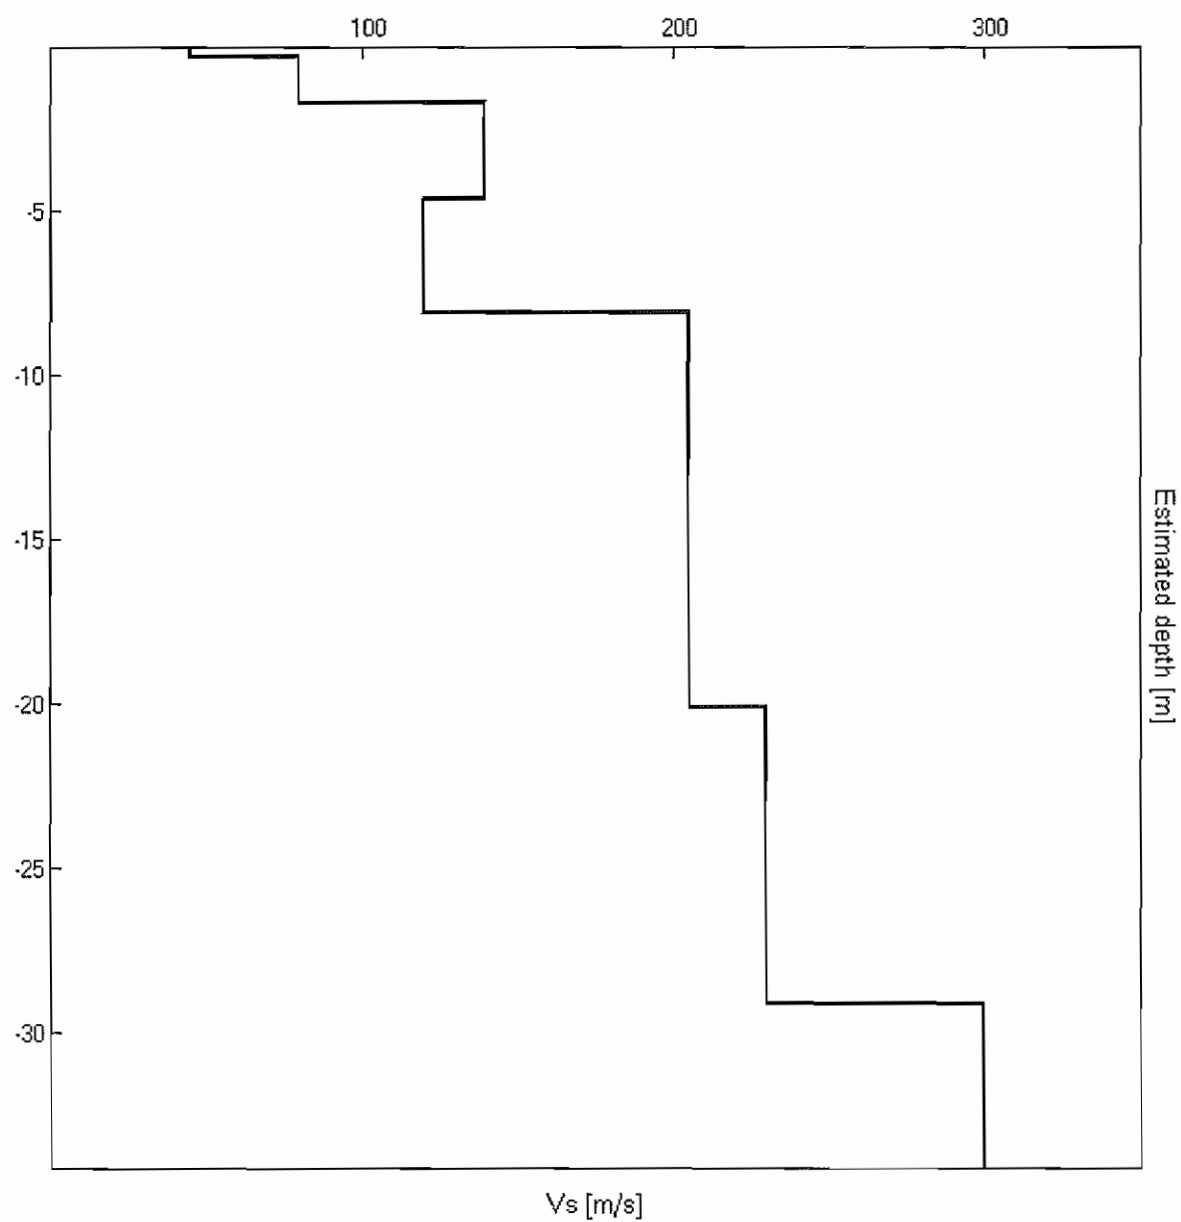

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 29.0 ± 4.05 Hz. (in the range 0.0 - 64.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$29.00 > 0.50$	OK	
$n_c(f_0) > 200$	$30740.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 1393 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	25.469 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	49.531 Hz	OK	
$A_0 > 2$	$4.83 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.06886 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$1.99686 < 1.45$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.4047 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 18

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available

Trace length: 0h20'00". Analyzed 92% trace (manual window selection)

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 5%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 0.75 ± 0.03 Hz (in the range 0.0 - 20.0 Hz)

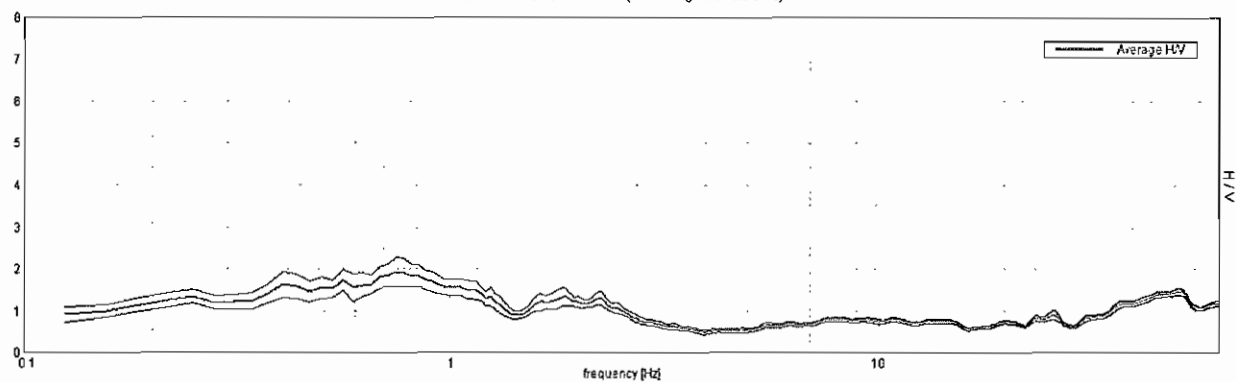


H/V TIME HISTORY

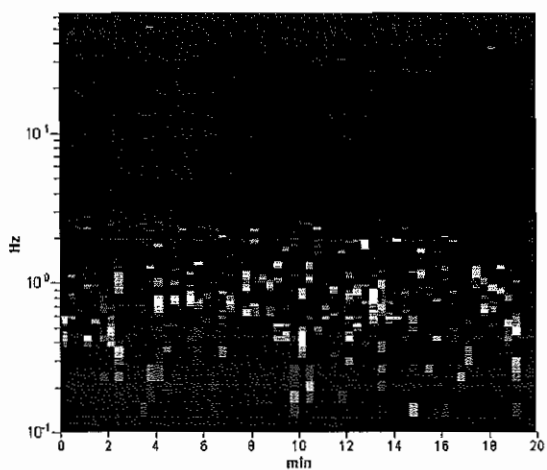


DIRECTIONAL H/V

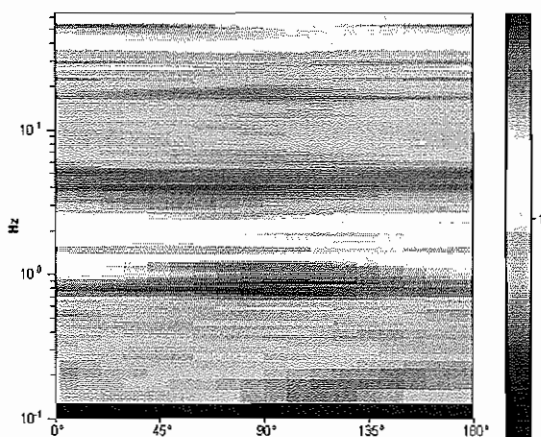

SINGLE COMPONENT SPECTRA

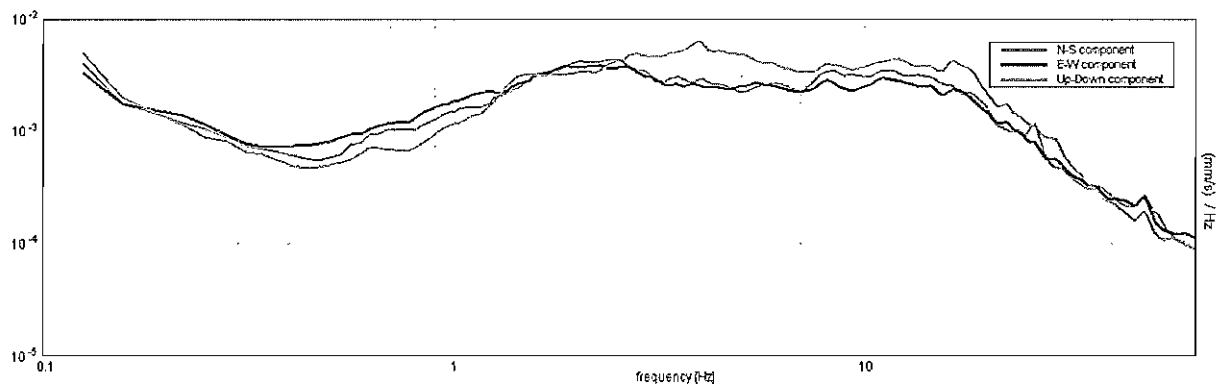

EXPERIMENTAL VS. SYNTHETIC H/V

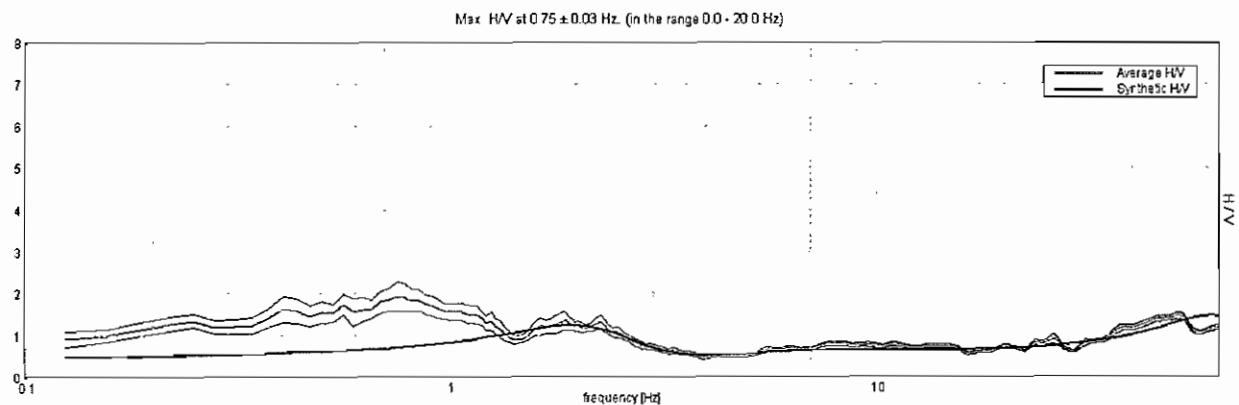

Depth at the bottom of the layer

Thickness [m]

Vs [m/s]

[m]

0.30

0.30

80

3.30

3.00

155

19.30

16.00

180

31.30

12.00


270

inf.

inf.

305

Vs(0.0-30.0)=198m/s

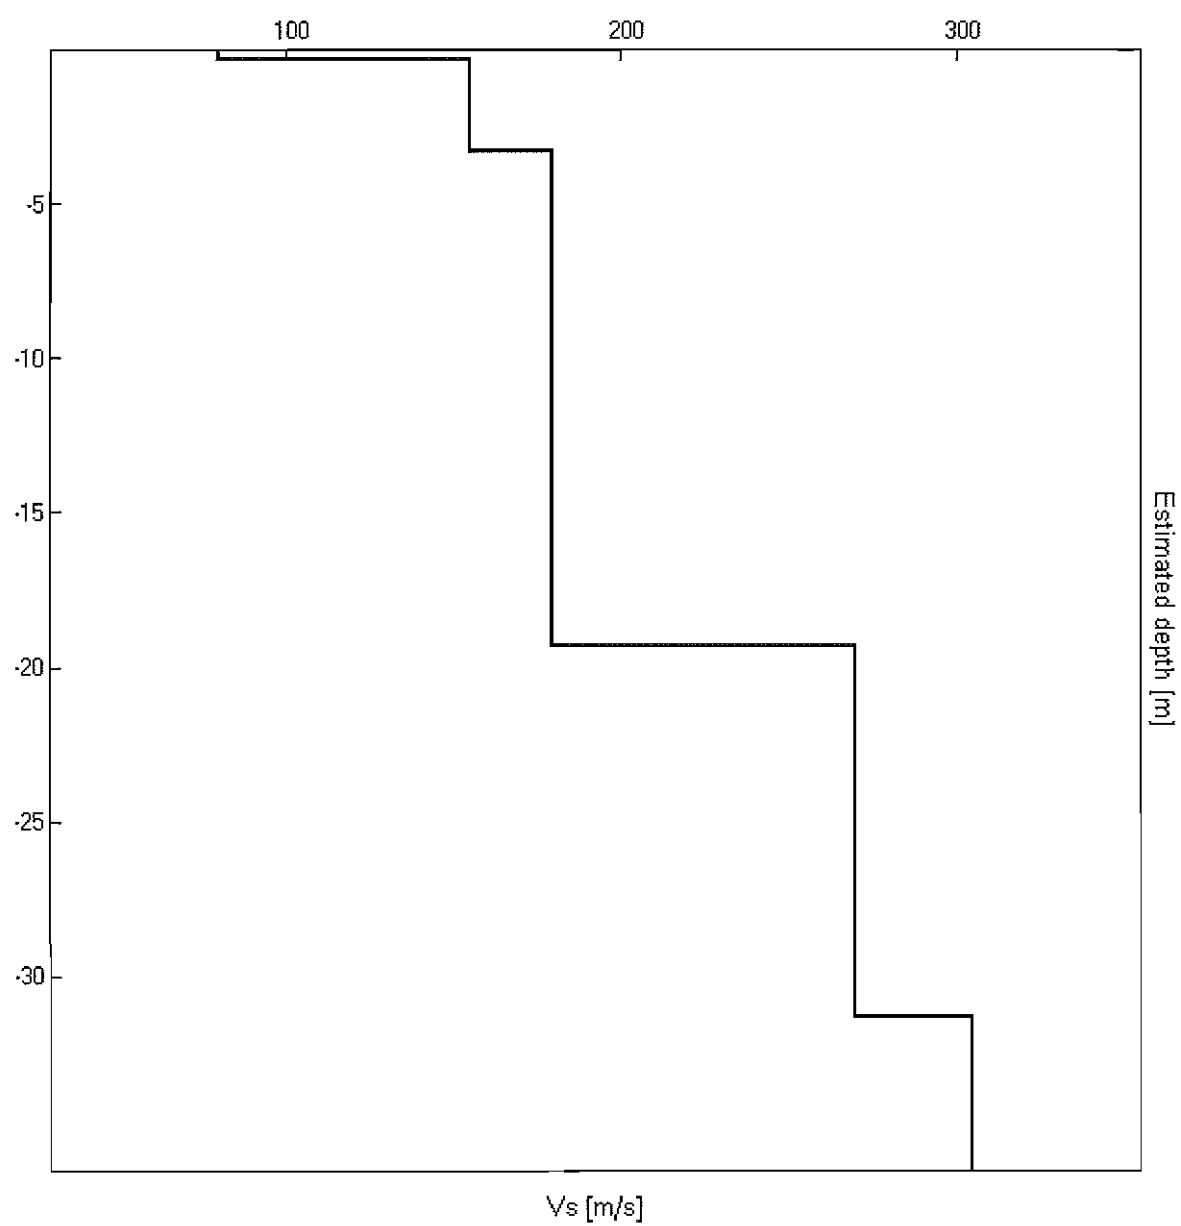

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 0.75 ± 0.03 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.75 > 0.50$	OK	
$n_c(f_0) > 200$	$825.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 37 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	1.406 Hz	OK	
$A_0 > 2$	$1.93 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.02299 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.01724 < 0.1125$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.1696 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq. range [Hz]	< 0.2	0.2 - 0.5	0.5 - 1.0	1.0 - 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


RAVENNA – n. 23

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available


Trace length: 0h09'48". Analyzed 86% trace (manual window selection)
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. HV at 19.69 ± 0.87 Hz (in the range 0.0 - 20.0 Hz)

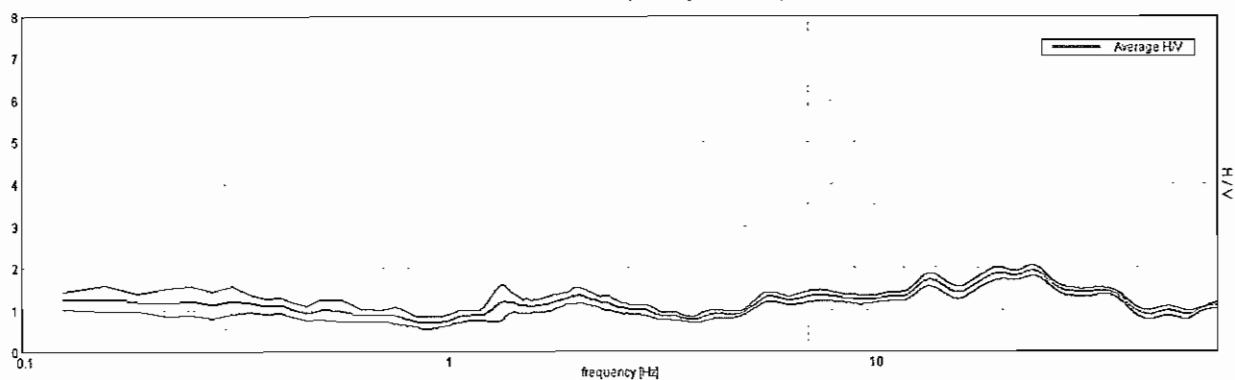


H/V TIME HISTORY

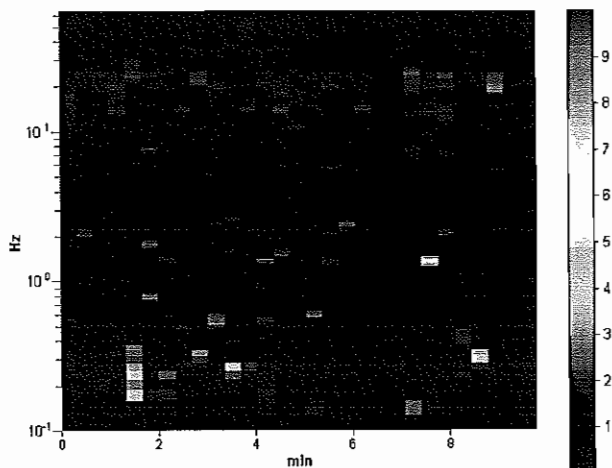


DIRECTIONAL H/V

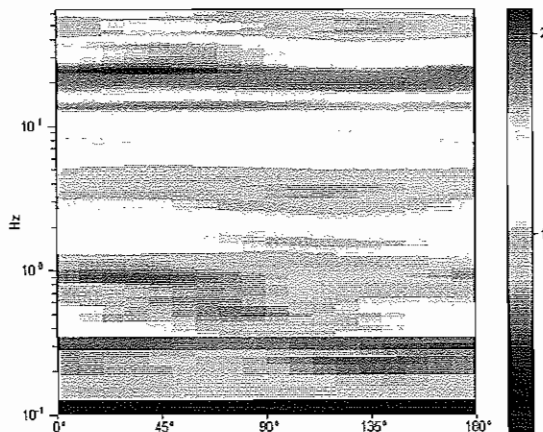

SINGLE COMPONENT SPECTRA

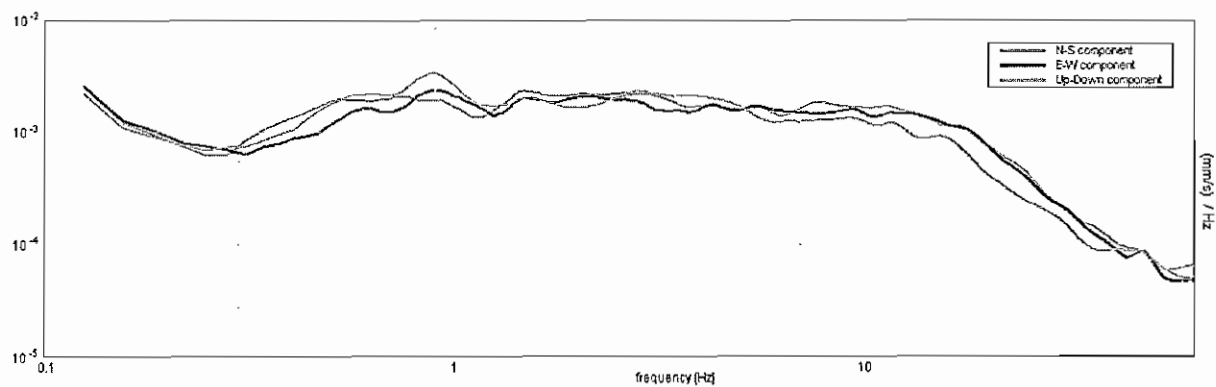

EXPERIMENTAL VS. SYNTHETIC H/V

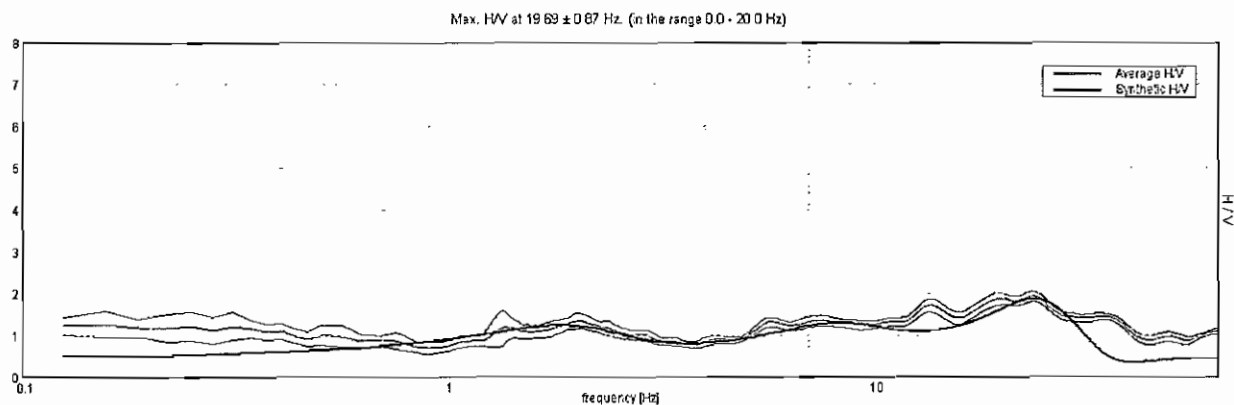

Depth at the bottom of the layer

[m]

0.55

2.55

4.55

19.55

39.55

inf.

Thickness [m]

0.55

2.00

2.00

15.00

20.00

inf.

Vs [m/s]

52

115


145

185

260

300

Vs(0.0-30.0)=184m/s

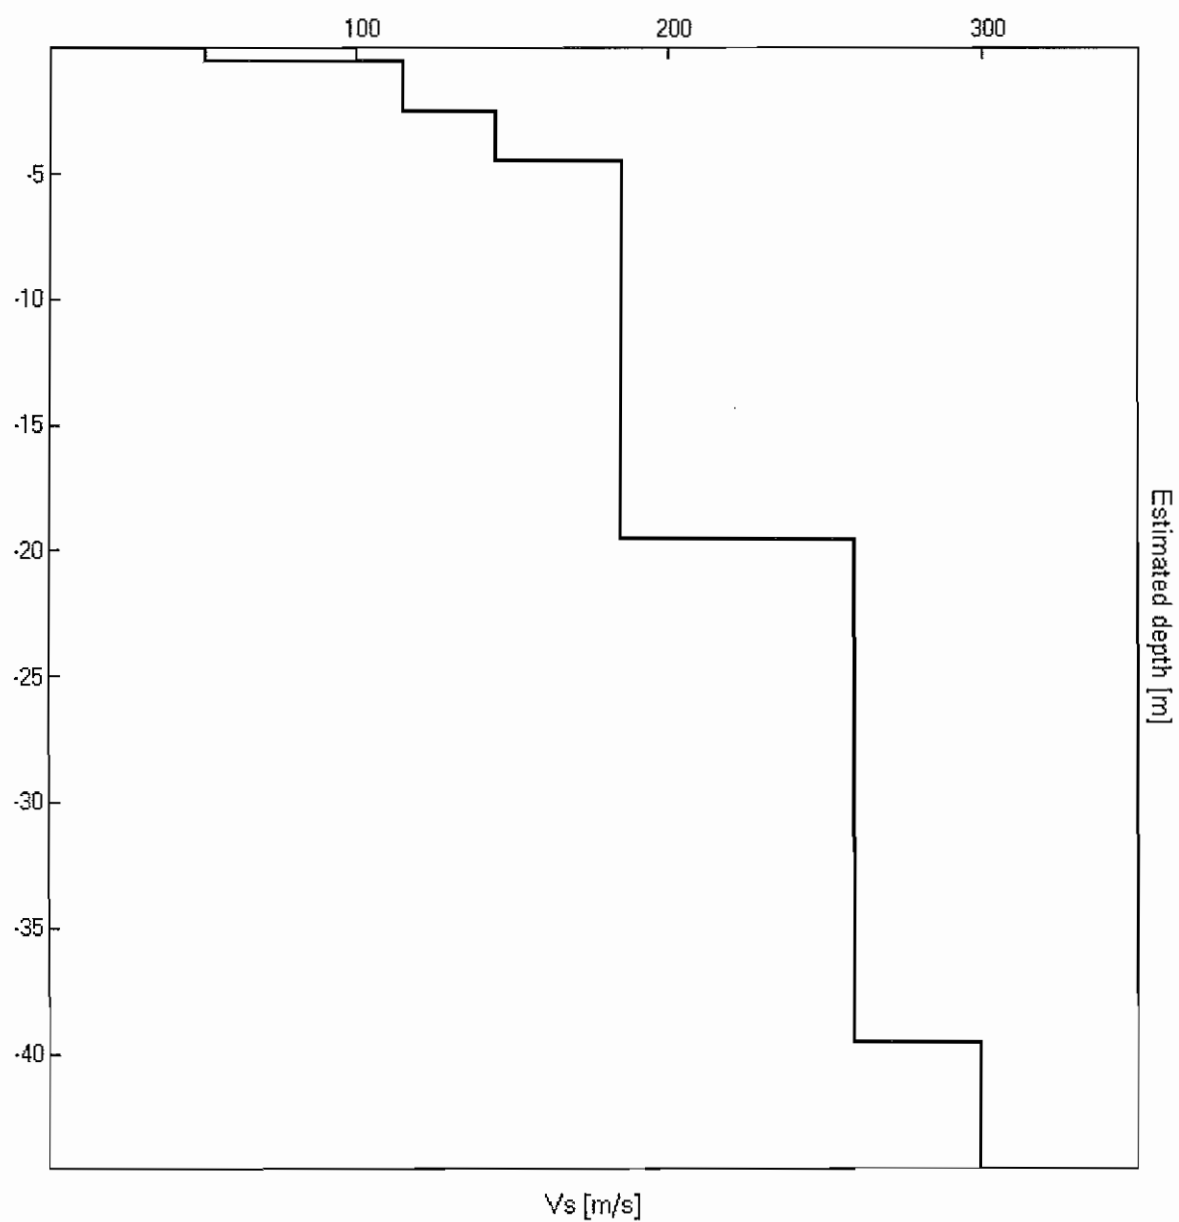

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 19.69 ± 0.87 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$19.69 > 0.50$	OK	
$n_c(f_0) > 200$	$9843.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 946 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	41.813 Hz	OK	
$A_0 > 2$	$1.87 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.02105 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.41434 < 0.98438$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.0685 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq.range [Hz]	< 0.2	0.2 - 0.5	0.5 - 1.0	1.0 - 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 23


GPS data not available

Trace length: 0h20'00". Analyzed 85% trace (manual window selection)
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

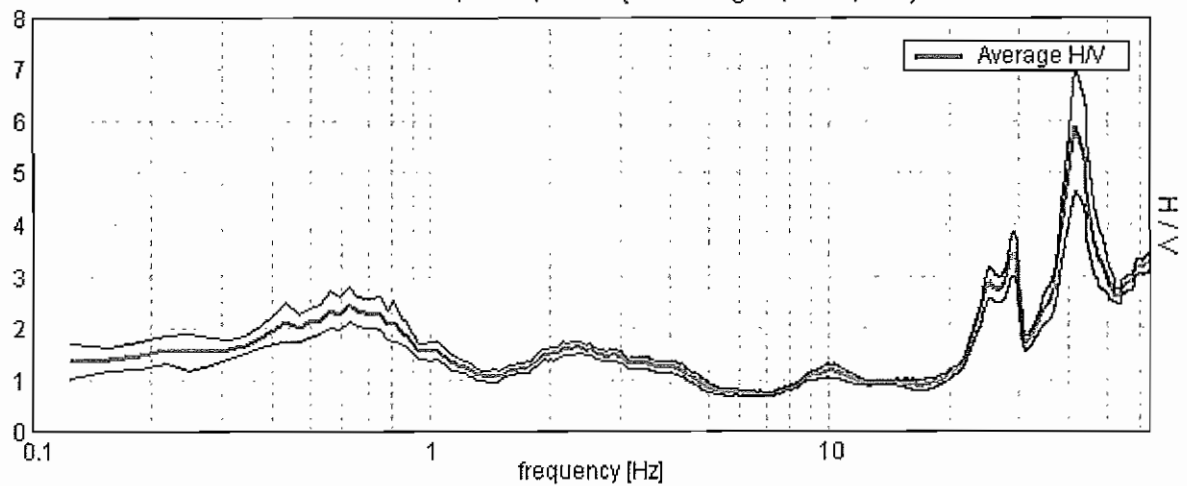Max. HVSR at $41,47 \pm 0,33$ Hz. (in the range 0,0 - 64,0 Hz).


H/V TIME HISTORY

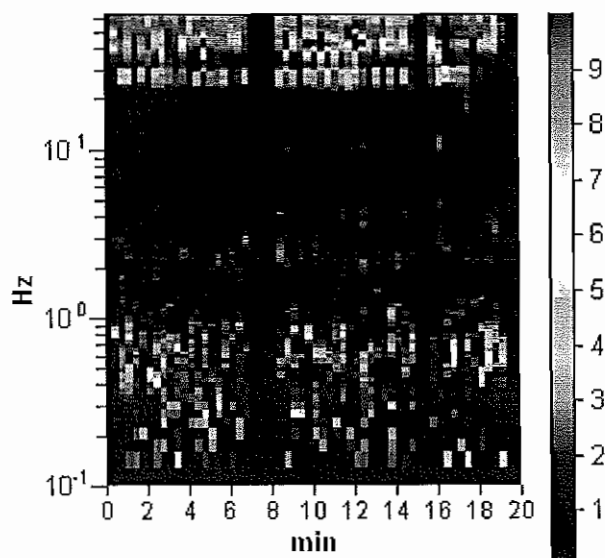

DIRECTIONAL H/V

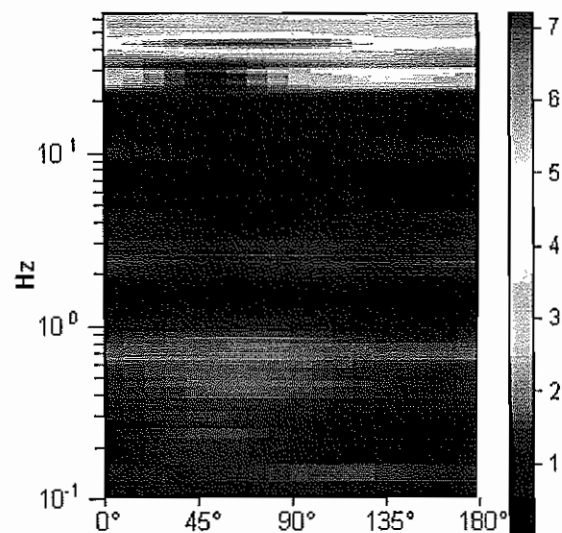


SINGLE COMPONENT SPECTRA

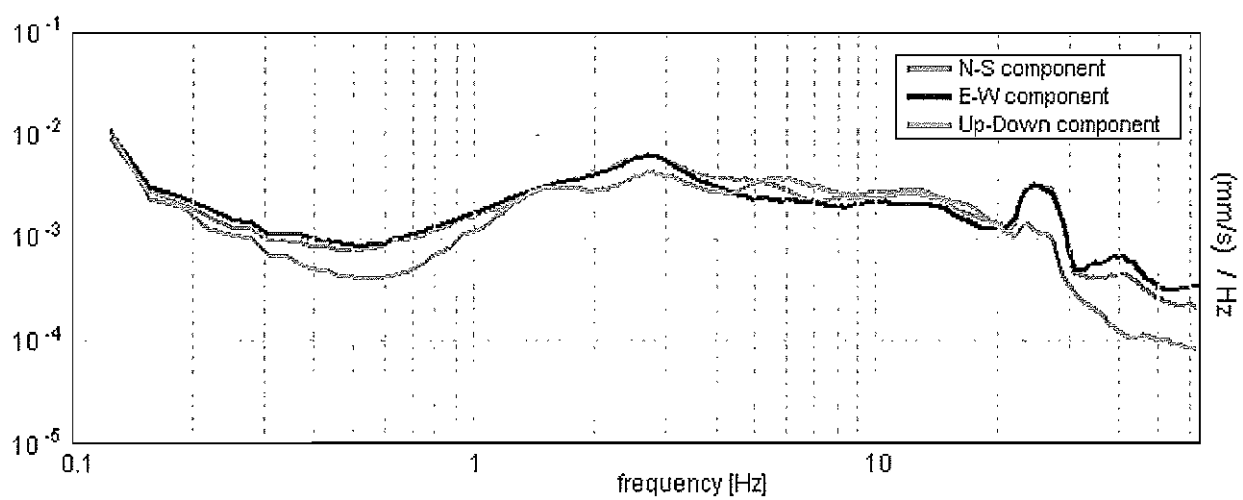

EXPERIMENTAL VS. SYNTHETIC H/V

Max. HVSR at $41,47 \pm 0,33$ Hz. (in the range 0,0 - 64,0 Hz).

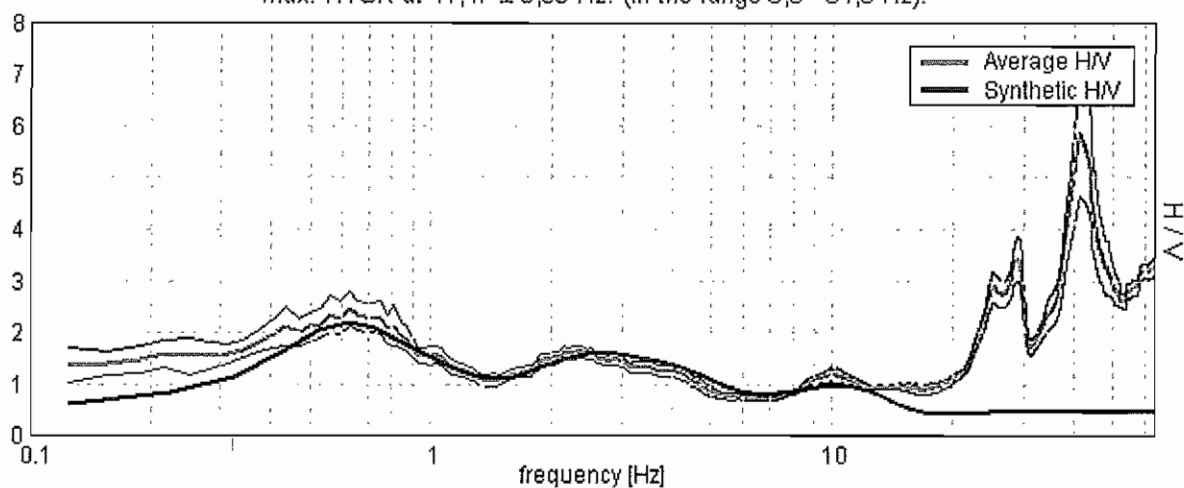


Depth at the bottom of the layer
[m]

Thickness [m]

Vs [m/s]

1.50	1.50	65
7.00	5.50	110
17.00	10.00	180
27.00	10.00	230
39.00	12.00	260
77.00	38.00	270
197.00	120.00	440
inf.	inf.	590

Vs(0.0-30.0)=163m/s

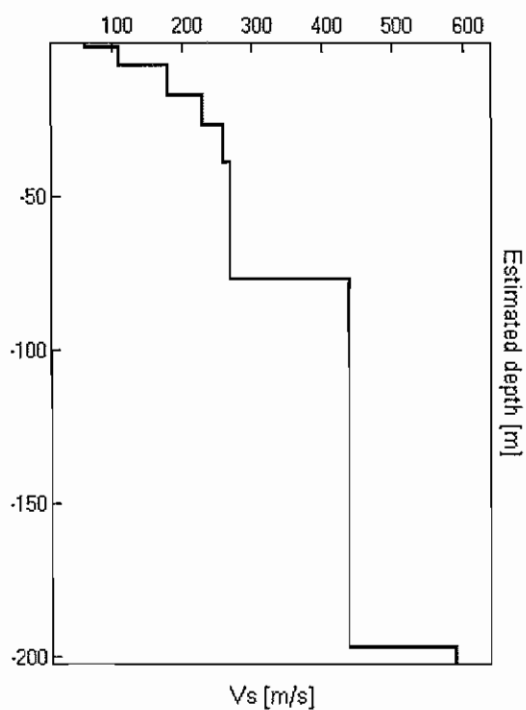

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. HVSR at $41,47 \pm 0,33$ Hz. (in the range 0,0 - 64,0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$41.47 > 0.50$	OK	
$n_c(f_0) > 200$	$42298.1 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 1386 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	37.031 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	50.25 Hz	OK	
$A_0 > 2$	$5.86 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.00394 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.16319 < 2.07344$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.6008 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 25

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h20'00". Analyzed 90% trace (manual window selection)


Sampling frequency: 128 Hz

Window size: 20 s


Smoothing window: Triangular window

Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

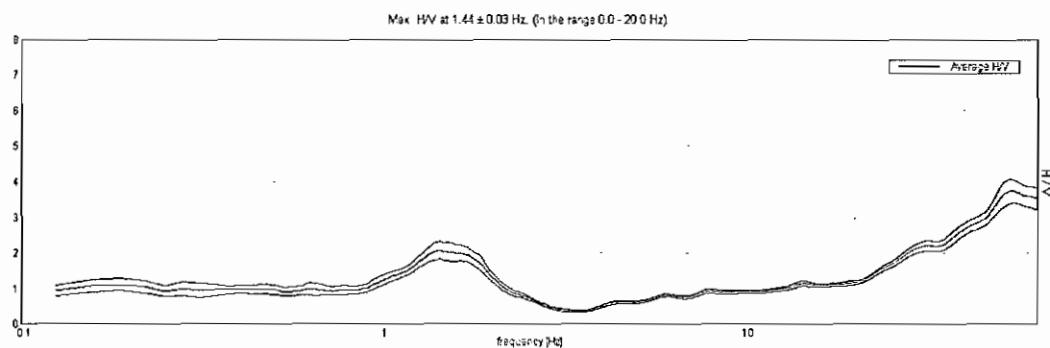


H/V TIME HISTORY

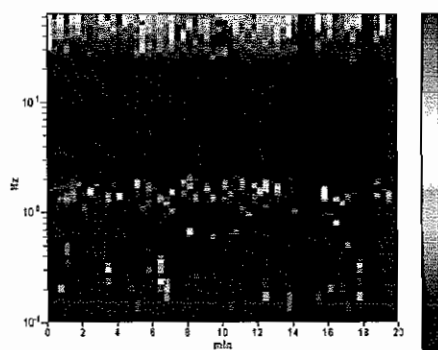


DIRECTIONAL H/V

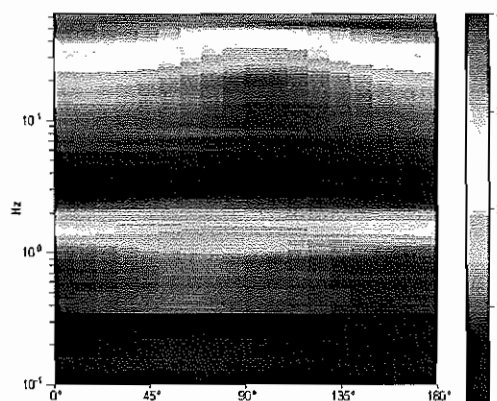

SINGLE COMPONENT SPECTRA

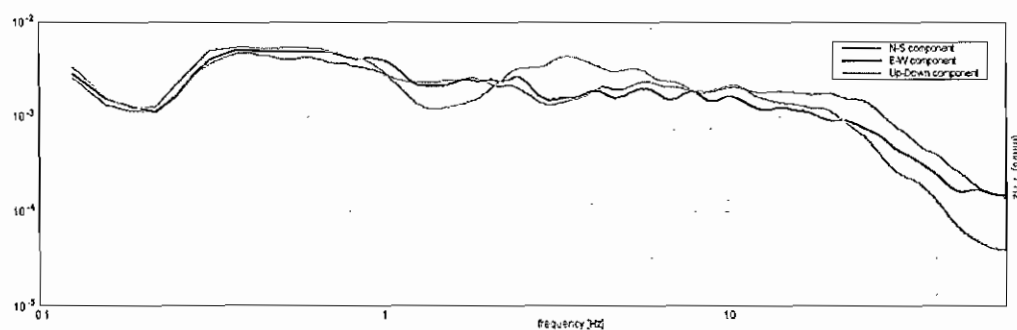

EXPERIMENTAL VS. SYNTHETIC H/V

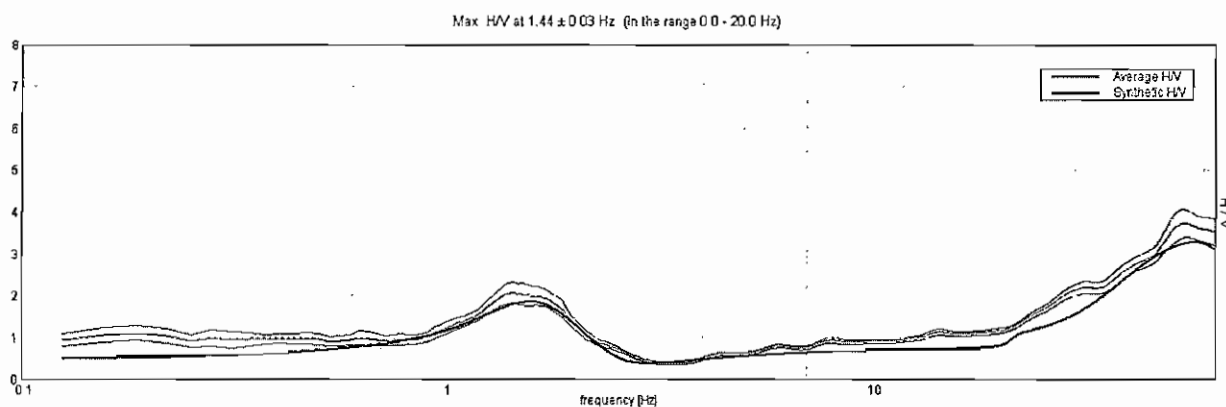

Depth at the bottom of the layer

[m]

0.18
0.68
2.68
5.68
16.68
31.68
inf.


Thickness [m]

0.18
0.50
2.00
3.00
11.00
15.00
inf.

Vs [m/s]

42
105
140
160
130
220
290

Vs(0.0-30.0)=160m/s

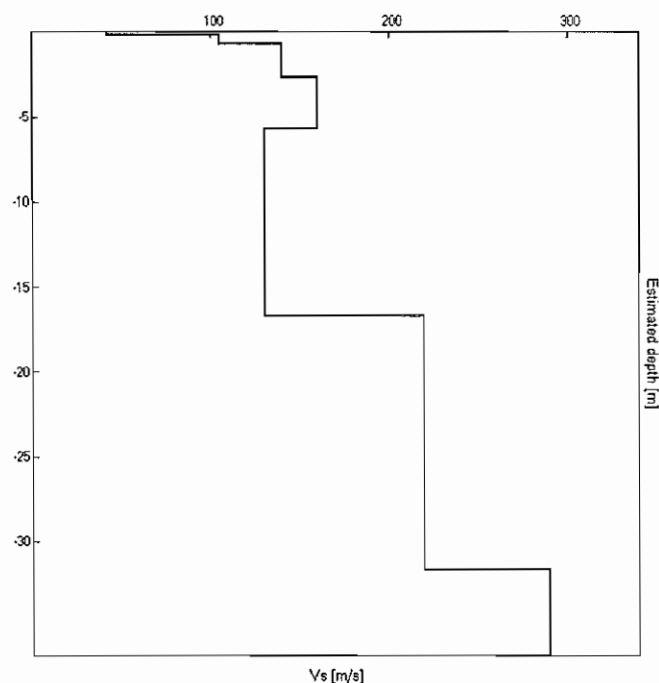

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 1.44 ± 0.03 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$1.44 > 0.50$	OK	
$n_c(f_0) > 200$	$1552.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 70 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	0.906 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	2.156 Hz	OK	
$A_0 > 2$	$2.07 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.01165 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.01675 < 0.14375$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.1203 < 1.78$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20


RAVENNA – n. 24

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available


Trace length: 0h20'00". Analyzed 82% trace (manual window selection)
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. H/V at 6.68 ± 0.6 Hz (in the range 0.0 - 20.0 Hz)

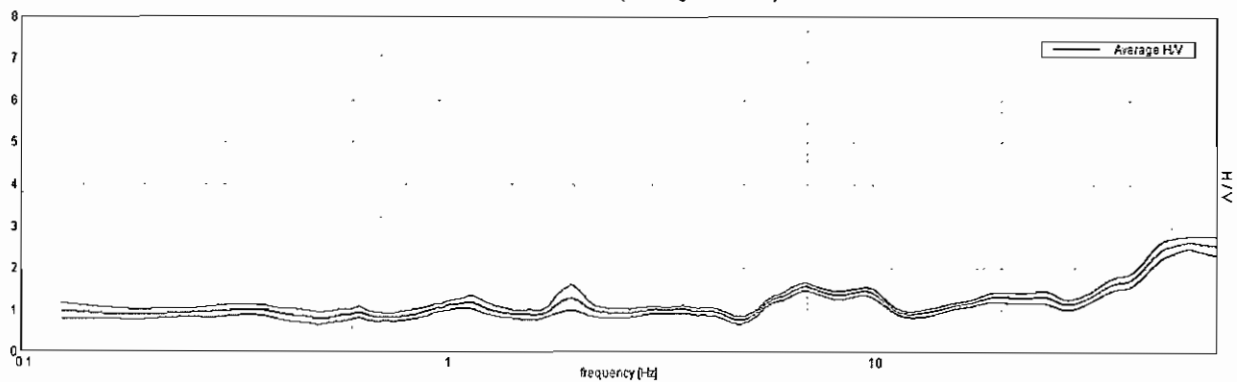


H/V TIME HISTORY

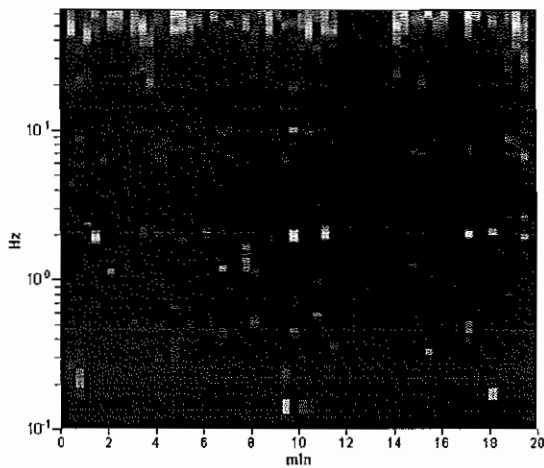


DIRECTIONAL H/V

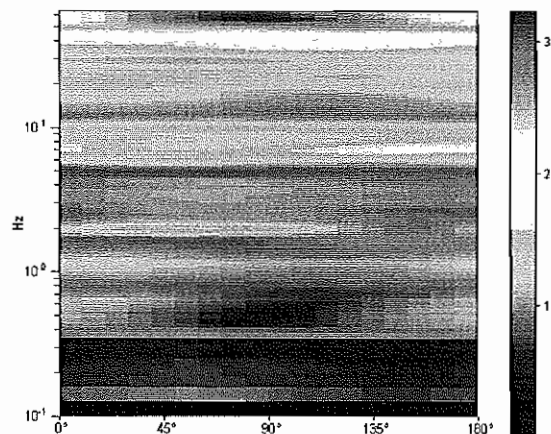

SINGLE COMPONENT SPECTRA

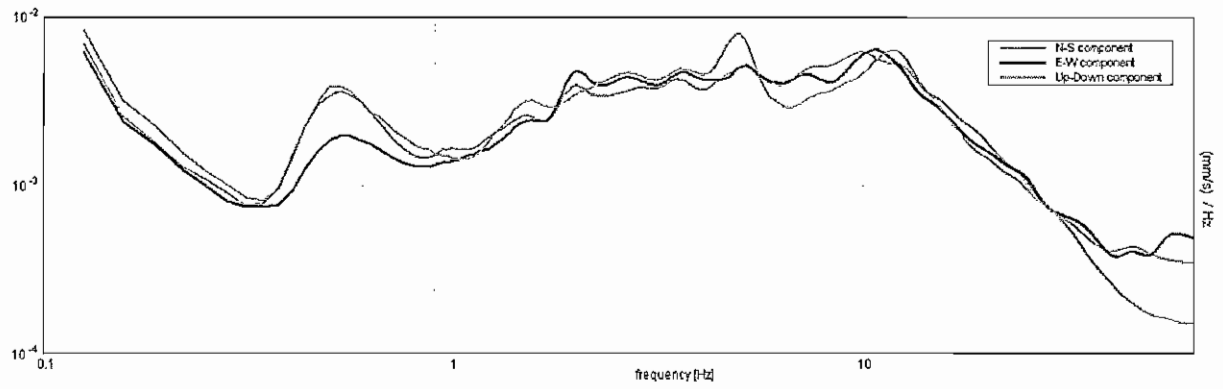

EXPERIMENTAL VS. SYNTHETIC H/V

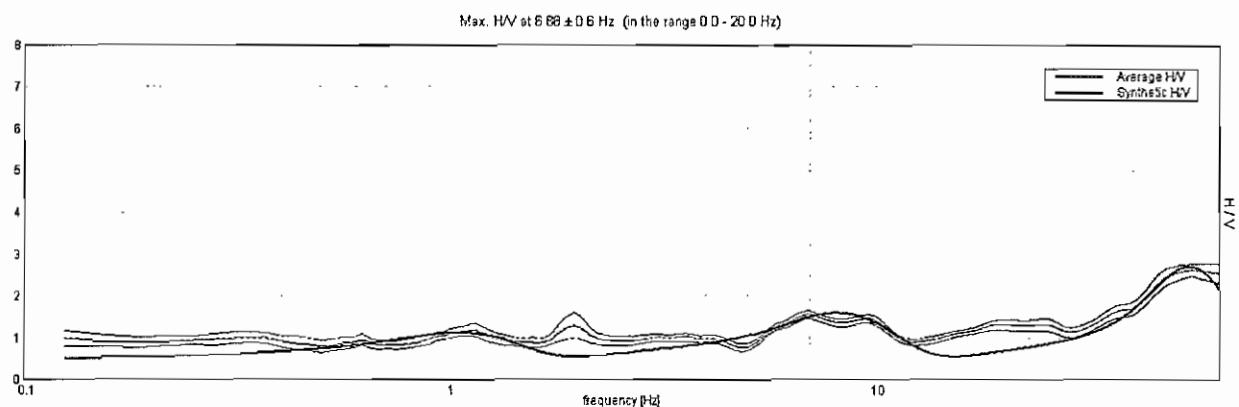

Depth at the bottom of the layer
[m]

Thickness [m]


Vs [m/s]

0.23
3.23
10.23
22.23
28.23
46.23
inf.

0.23
3.00
7.00
12.00
6.00
18.00
inf.

50
118
220
230
200
220
360

Vs(0.0-30.0)=197m/s

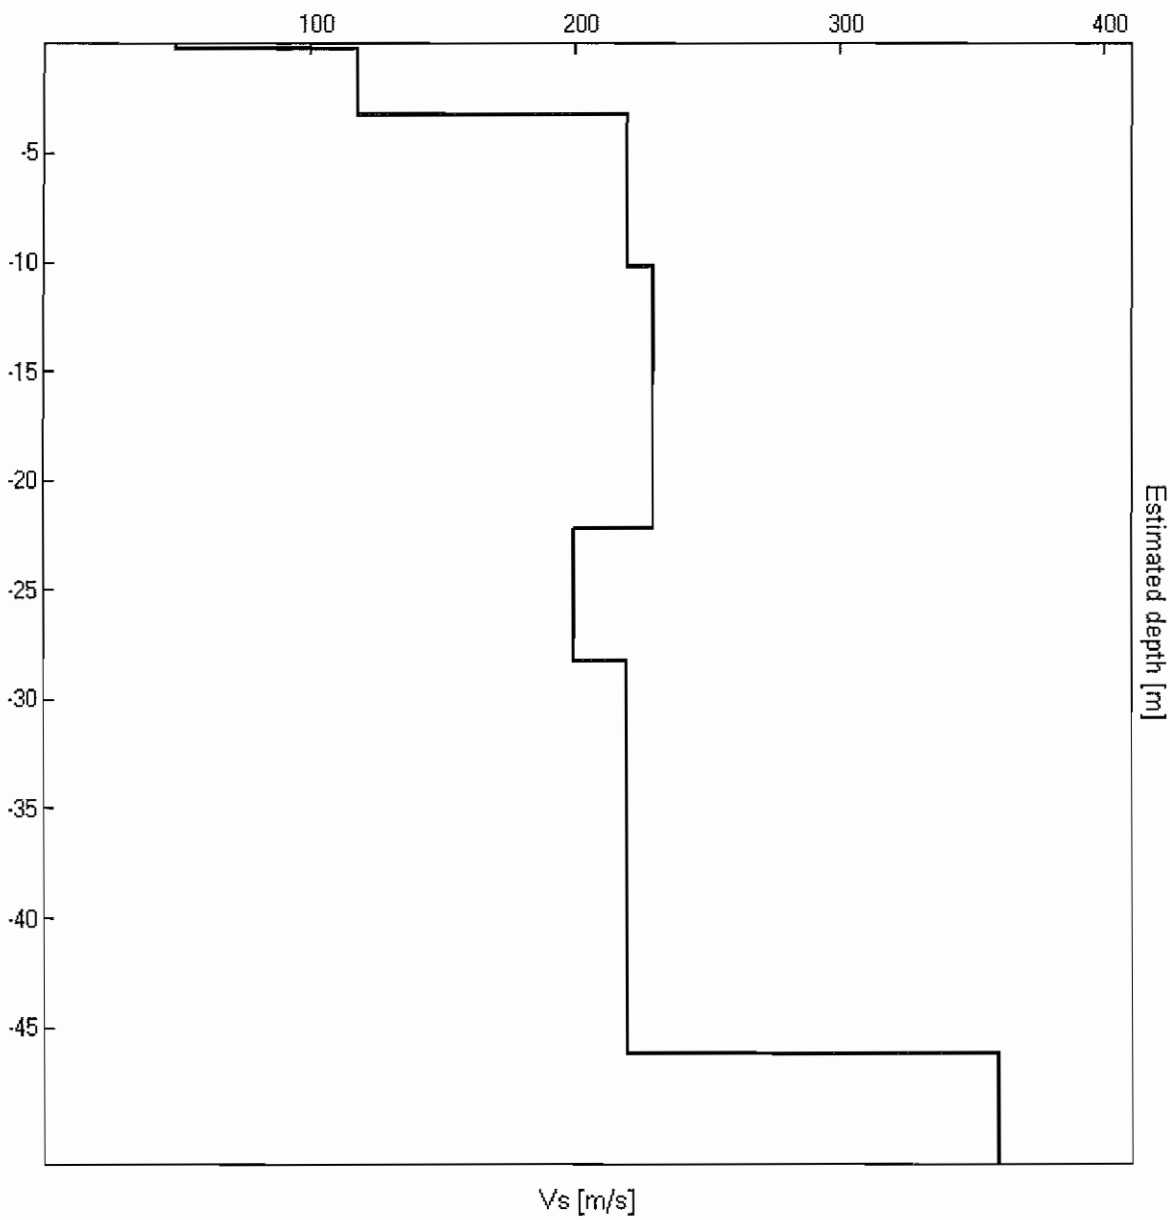

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 6.88 ± 0.6 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$6.88 > 0.50$	OK	
$n_c(f_0) > 200$	$6737.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 331 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	4.969 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$1.56 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.04274 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.29383 < 0.34375$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.0469 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 13

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h16'00". Analyzed 77% trace (manual window selection)

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. HV at 29.69 ± 2.76 Hz. (in the range 0.0 - 64.0 Hz)

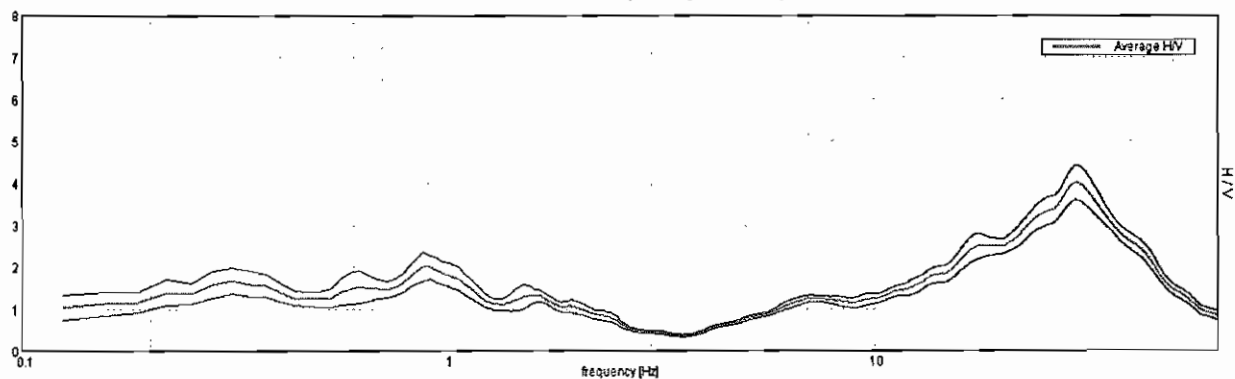


H/V TIME HISTORY

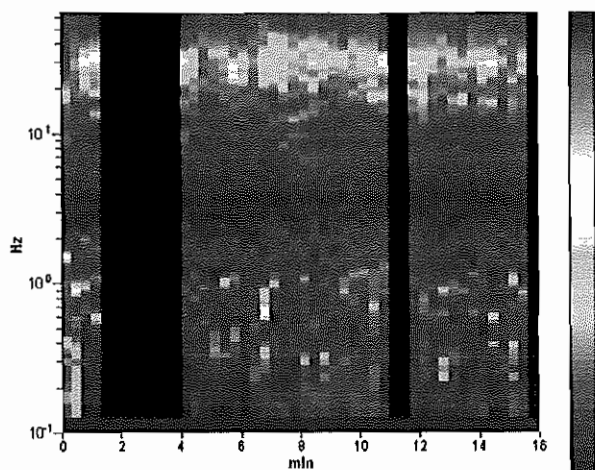


DIRECTIONAL H/V

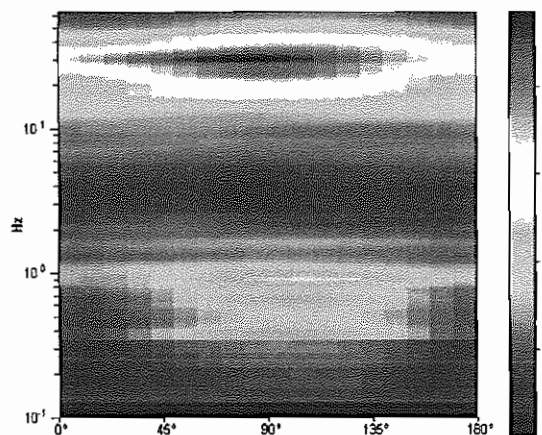

SINGLE COMPONENT SPECTRA

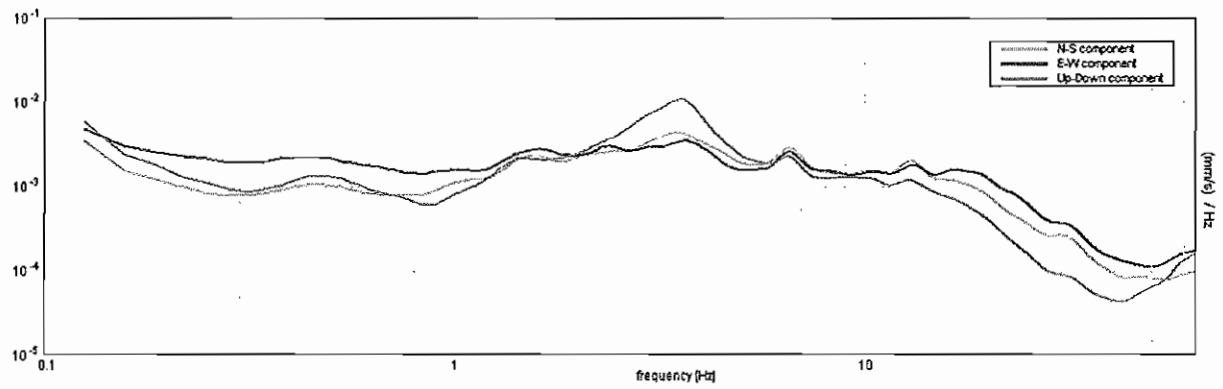

EXPERIMENTAL VS. SYNTHETIC H/V

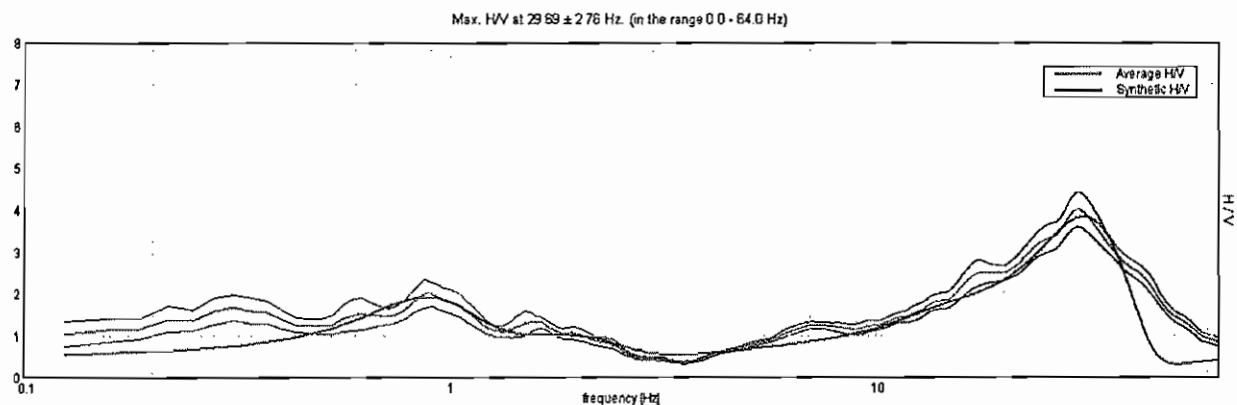


Depth at the bottom of the layer
[m]

Thickness [m]

Vs [m/s]

0.47	0.47	60
0.77	0.30	120
1.57	0.80	145
2.07	0.50	150
4.07	2.00	190
8.07	4.00	210
10.07	2.00	220
17.07	7.00	180
32.07	15.00	250
102.07	70.00	360
inf.	inf.	570

Vs(0.0-30.0)=202m/s

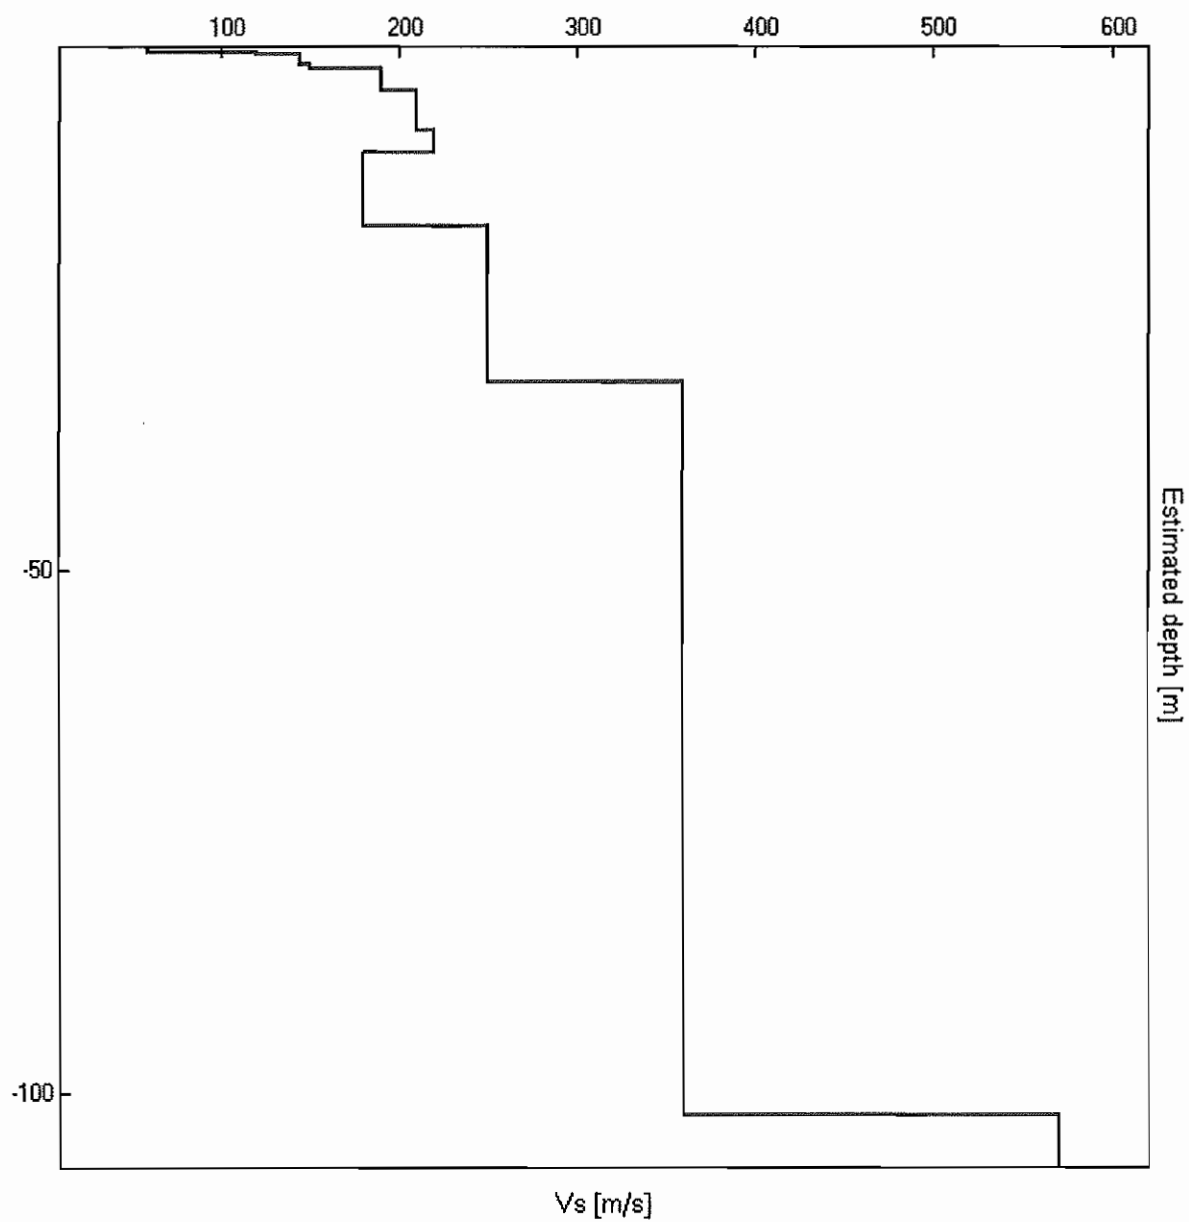

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 29.69 ± 2.76 Hz. (in the range 0.0 - 64.0 Hz).

Criteria for a reliable HVSr curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$29.69 > 0.50$	OK	
$n_c(f_0) > 200$	$21968.8 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 1426 times	OK	

Criteria for a clear HVSr peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	15.375 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	45.594 Hz	OK	
$A_0 > 2$	$4.01 > 2$	OK	
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.04516 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$1.34074 < 1.48438$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.2003 < 1.58$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$


Freq.range [Hz]	< 0.2	0.2 - 0.5	0.5 - 1.0	1.0 - 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA - n. 35


Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN
GPS data not available

Trace length: 0h20'00". Analysis performed on the entire trace.
Sampling frequency: 128 Hz
Window size: 20 s
Smoothing window: Triangular window
Smoothing: 10%


HORIZONTAL TO VERTICAL SPECTRAL RATIO

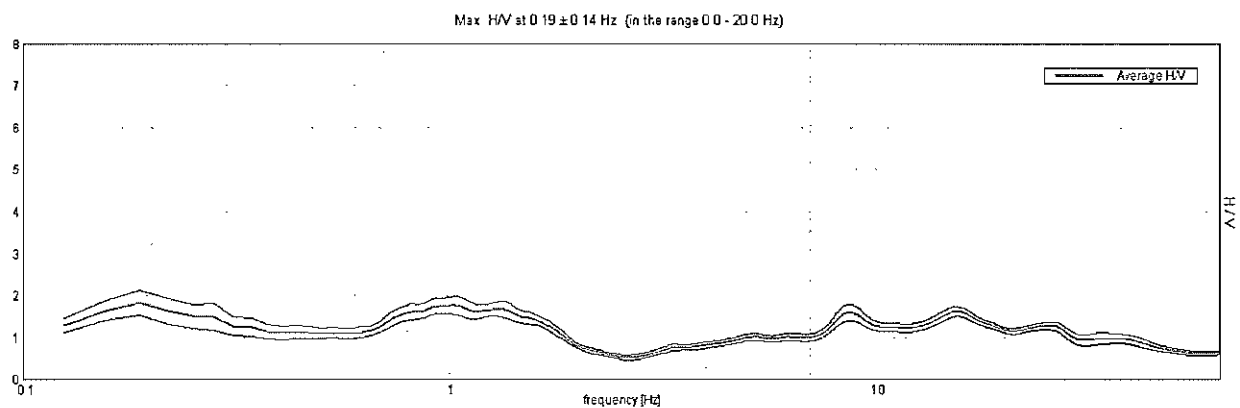


H/V TIME HISTORY

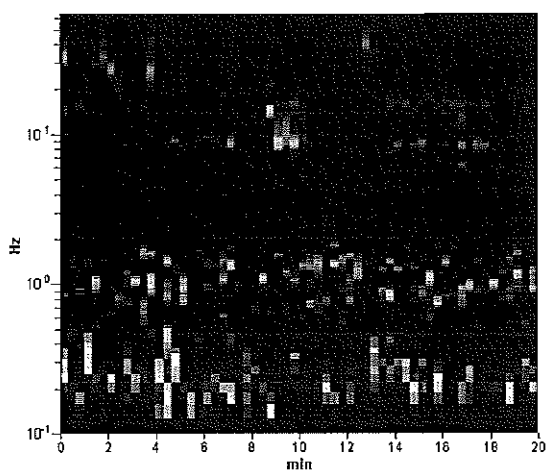


DIRECTIONAL H/V

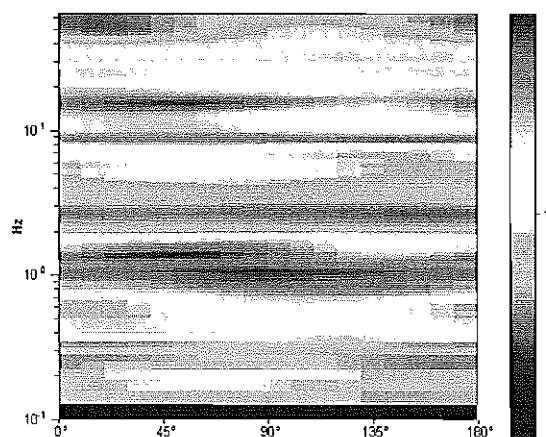

SINGLE COMPONENT SPECTRA

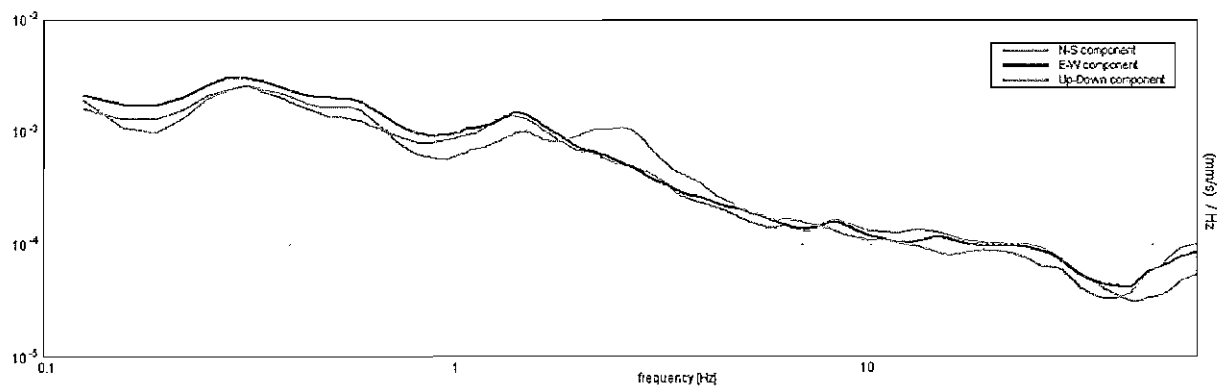

EXPERIMENTAL VS. SYNTHETIC H/V

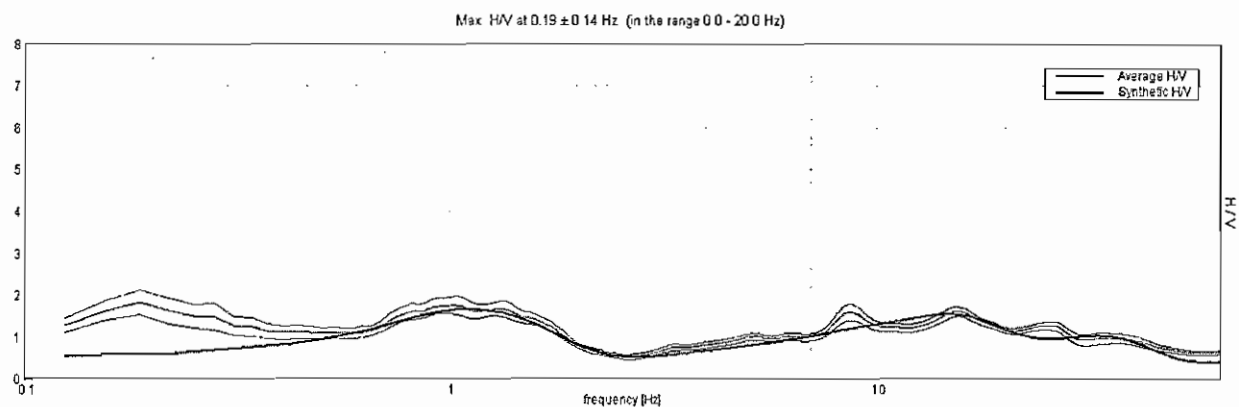


Depth at the bottom of the layer
[m]

Thickness [m]

Vs [m/s]

0.40	0.40	55
1.70	1.30	100
6.70	5.00	160
10.70	4.00	190
20.70	10.00	155
41.70	21.00	250
69.70	28.00	325
101.70	32.00	350
inf.	inf.	400

Vs(0.0-30.0)=172m/s

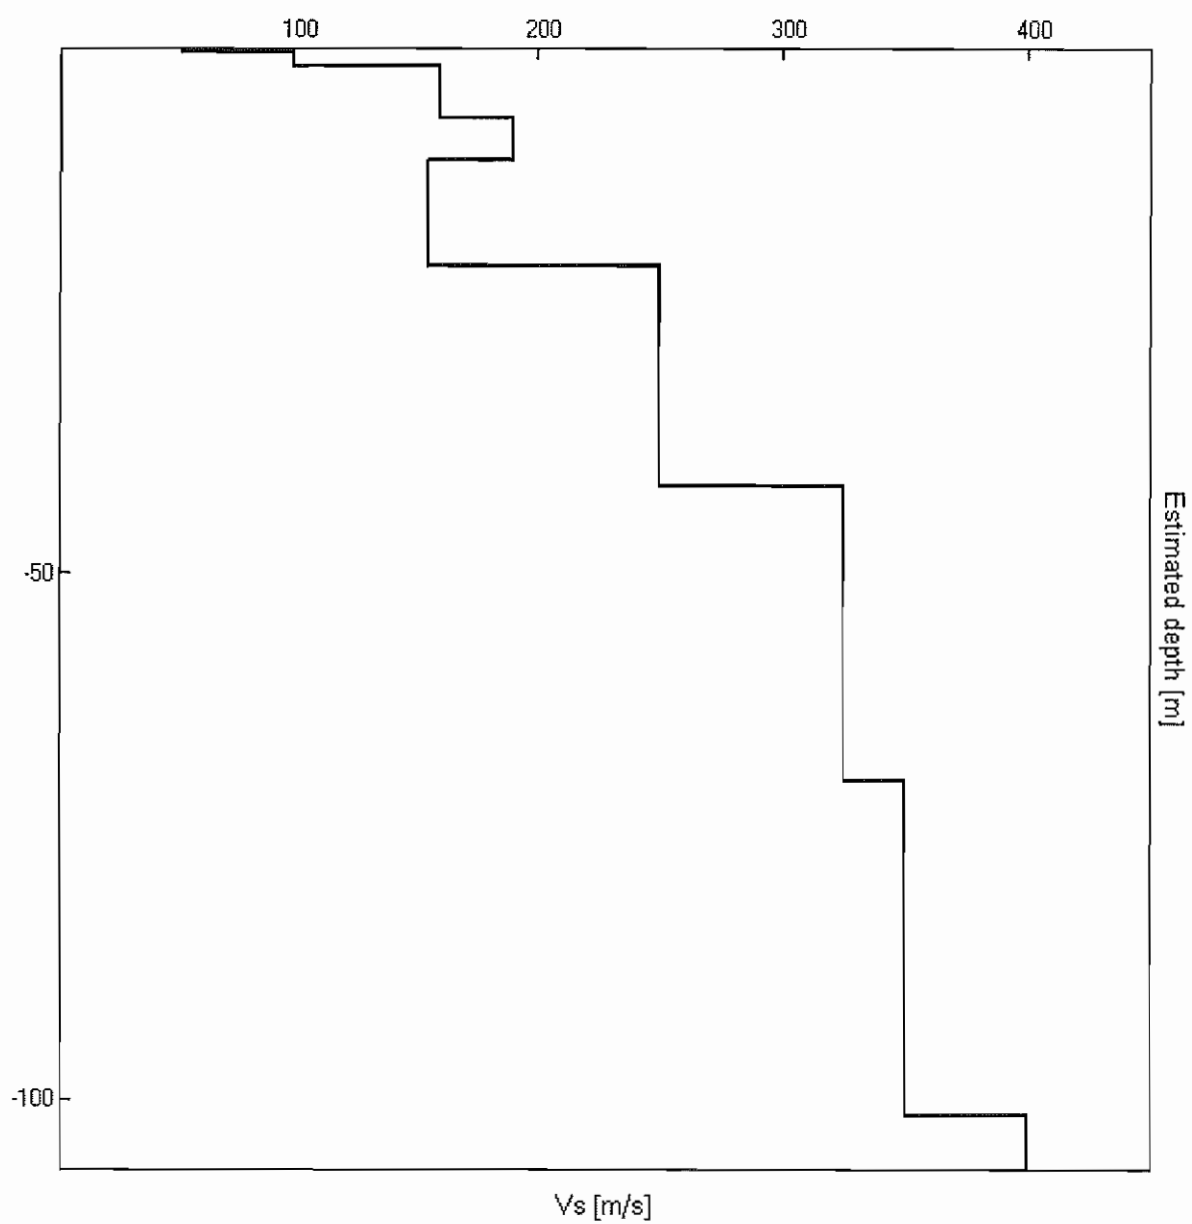

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 0.19 ± 0.14 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.19 > 0.50$		NO
$n_c(f_0) > 200$	$225.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 10 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$	0.094 Hz	OK	
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$			NO
$A_0 > 2$	$1.83 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$0.36701 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.06882 < 0.04688$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.142 < 3.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 12

Start recording: 23/09/10 16:06:14 End recording: 23/09/10 16:26:15

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available

Trace length: 0h20'00". Analyzed 73% trace (manual window selection)

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. HV at 0.84 ± 0.60 Hz. (in the range 0.0 - 20.0 Hz).

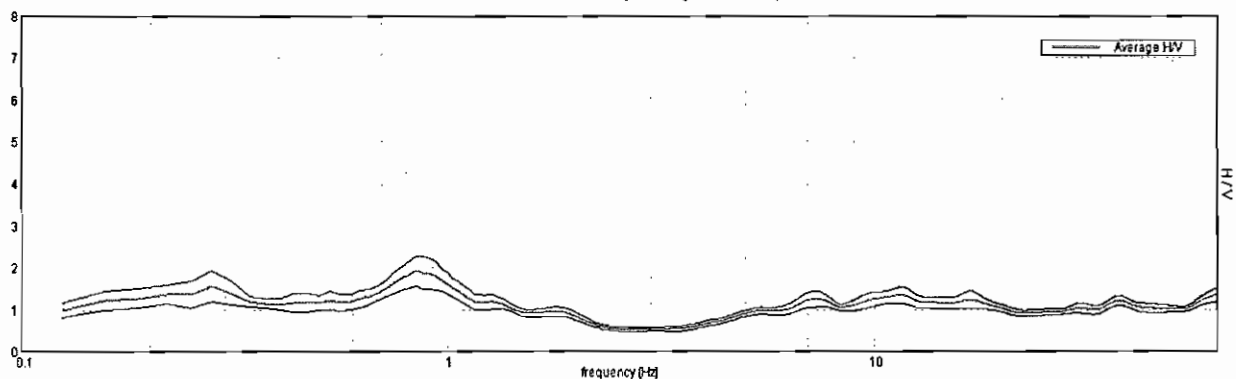


H/V TIME HISTORY

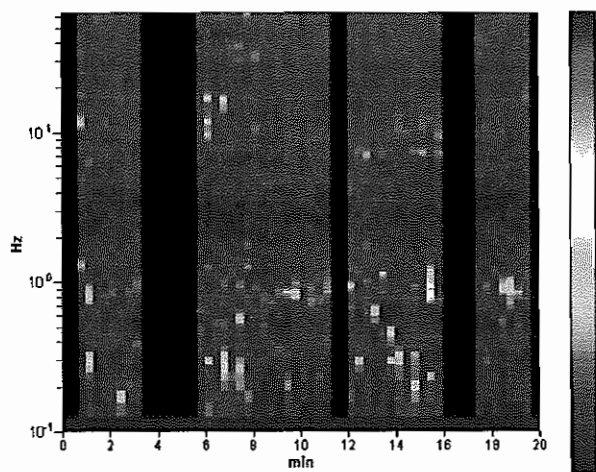


DIRECTIONAL H/V

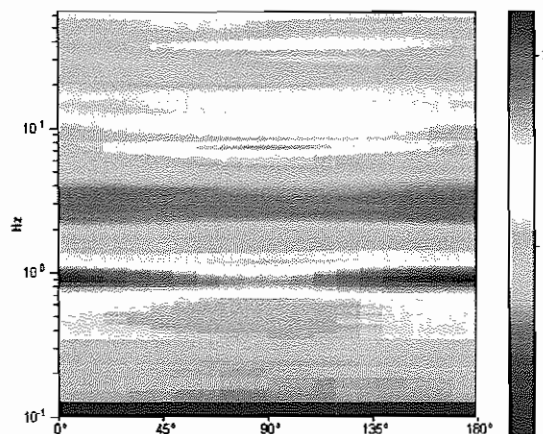

SINGLE COMPONENT SPECTRA

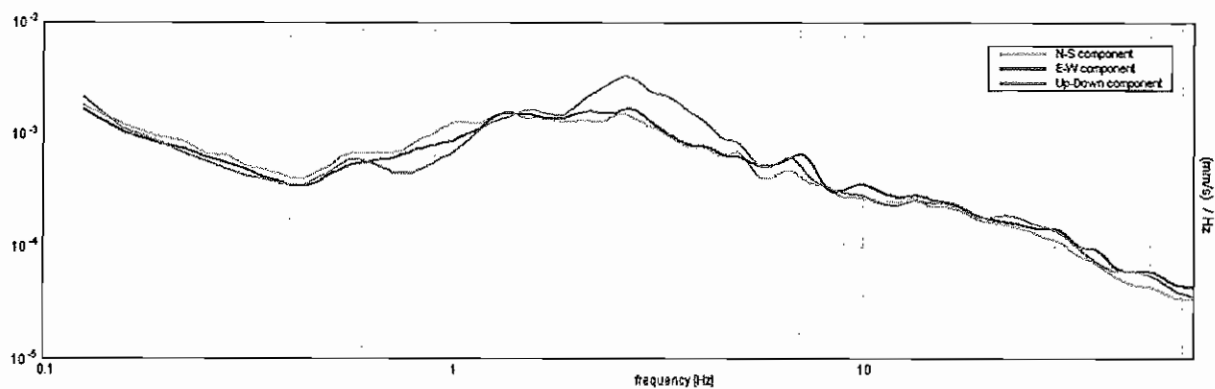

EXPERIMENTAL VS. SYNTHETIC H/V

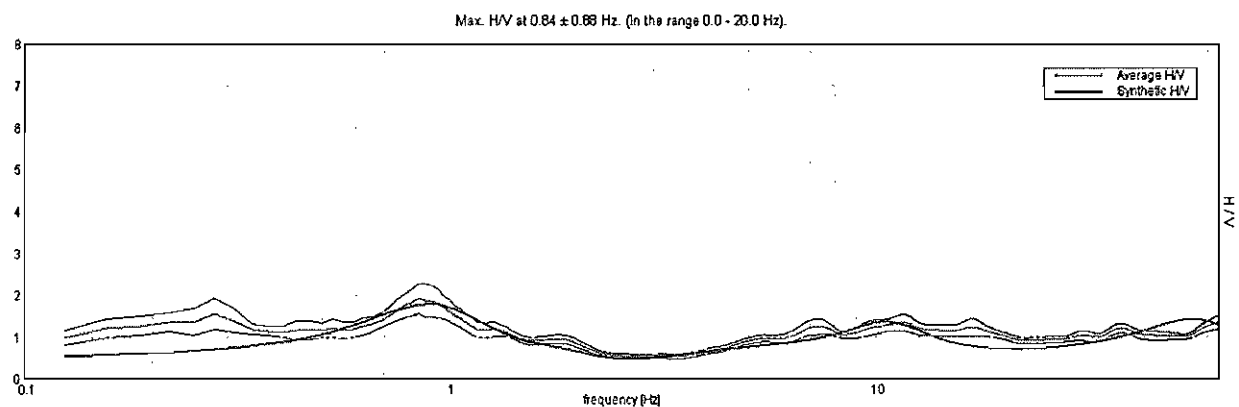

Depth at the bottom of the layer

[m]

Thickness [m]


Vs [m/s]

0.30
2.30
5.30
10.30
28.30
93.30
inf.

0.30
2.00
3.00
5.00
18.00
65.00
inf.

70
130
190
240
185
340
520

Vs(0.0-30.0)=189m/s

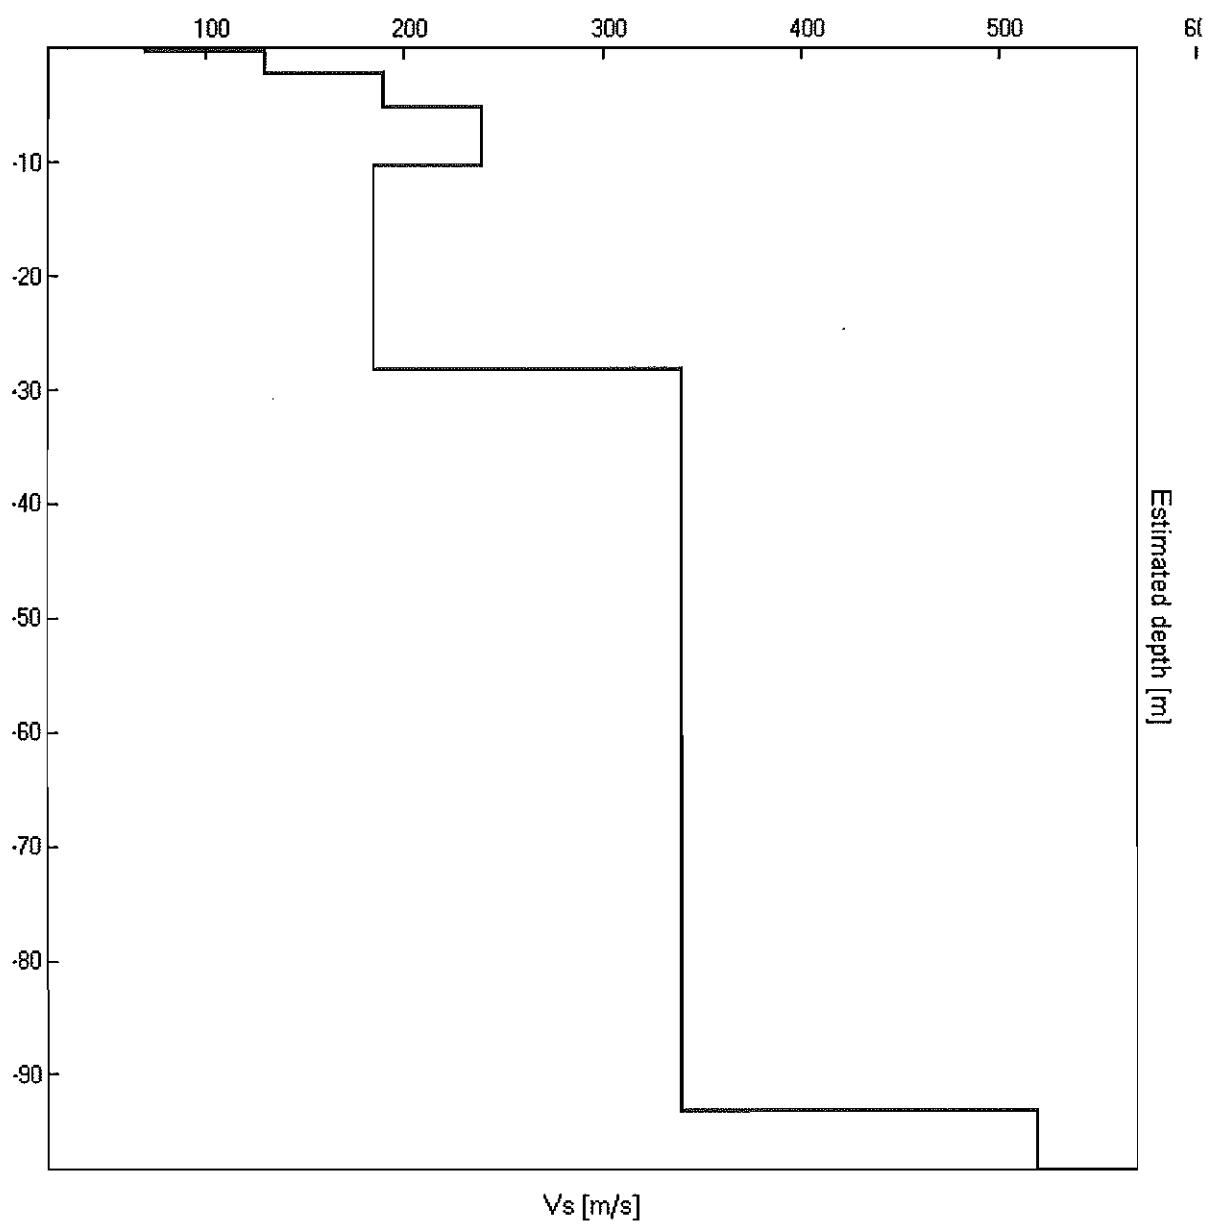

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 0.84 ± 0.88 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.84 > 0.50$	OK	
$n_c(f_0) > 200$	$742.5 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 42 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0]$ $A_{H/V}(f^-) < A_0 / 2$			NO
Exists f^+ in $[f_0, 4f_0]$ $A_{H/V}(f^+) < A_0 / 2$	1.5 Hz	OK	
$A_0 > 2$	$1.92 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.50947 < 0.05$		NO
$\sigma_f < \varepsilon(f_0)$	$0.42987 < 0.12656$		NO
$\sigma_A(f_0) < \theta(f_0)$	$0.1784 < 2.0$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20

RAVENNA – n. 17

Channel labels: NORTH SOUTH; EAST WEST ; UP DOWN

GPS data not available

Trace length: 0h20'00". Analyzed 85% trace (manual window selection)

Sampling frequency: 128 Hz


Window size: 20 s

Smoothing window: Triangular window


Smoothing: 10%

HORIZONTAL TO VERTICAL SPECTRAL RATIO


Max. HV at 0.25 ± 0.02 Hz (in the range 0.0 - 20.0 Hz).

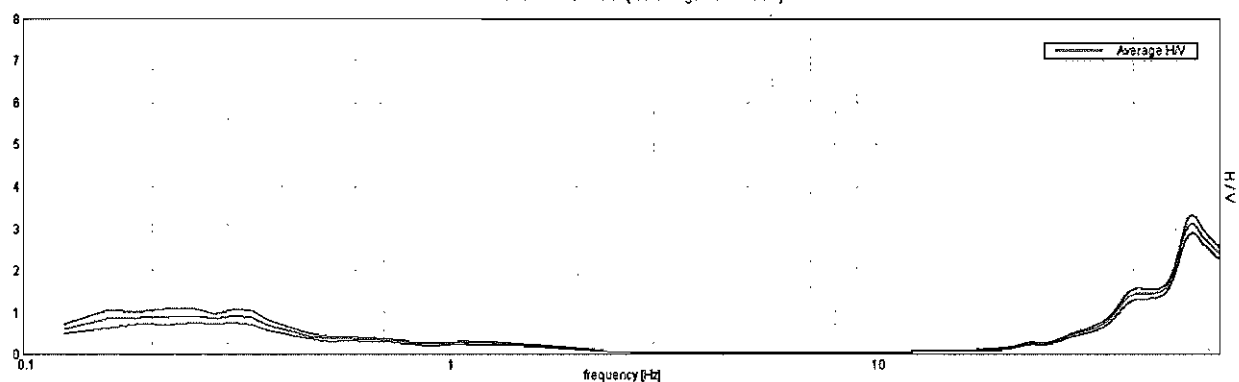


H/V TIME HISTORY

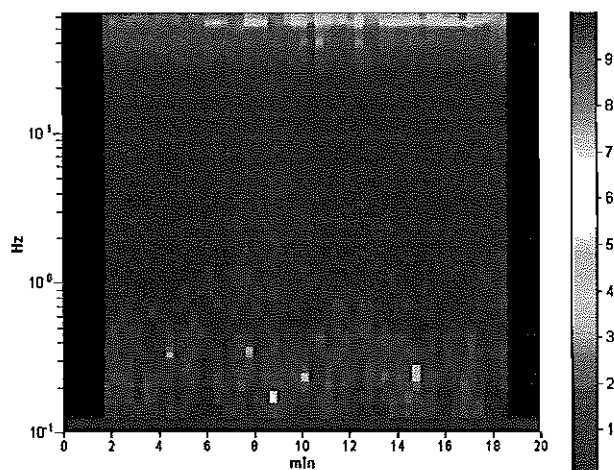


DIRECTIONAL H/V

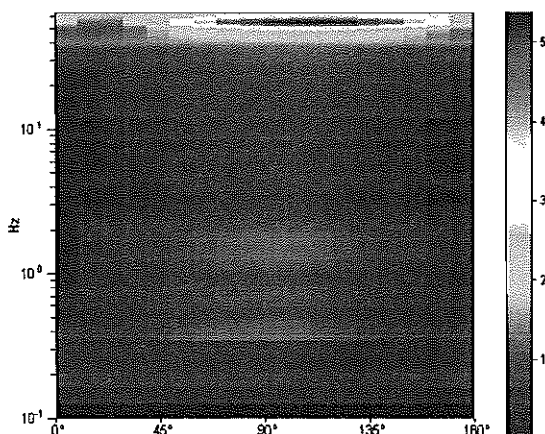

SINGLE COMPONENT SPECTRA

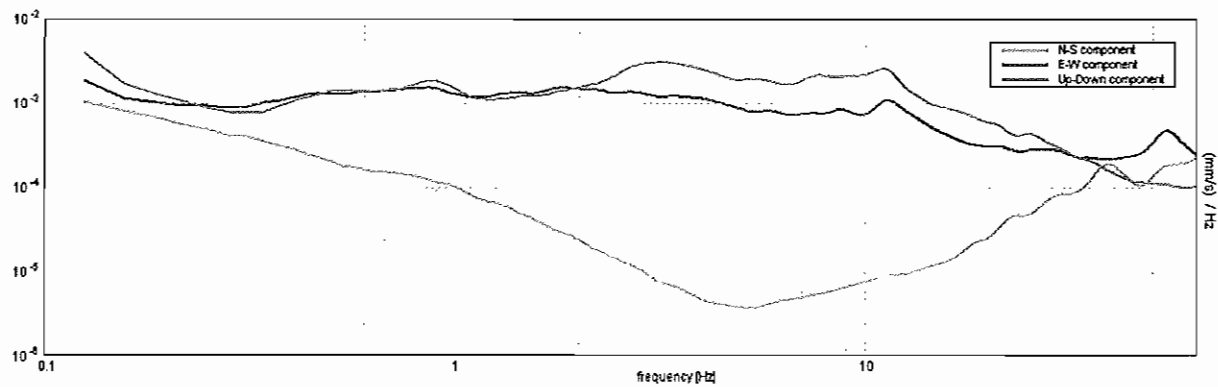

EXPERIMENTAL VS. SYNTHETIC H/V

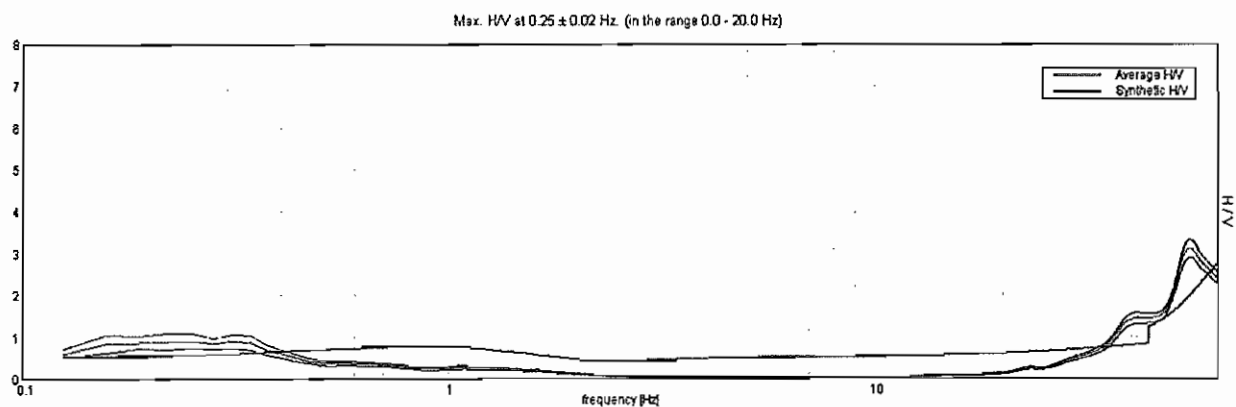

Depth at the bottom of the layer

[m]

Thickness [m]

Vs [m/s]

0.25

0.25

70

10.25

10.00

163

24.25

14.00

150

69.25

45.00


220

inf.

inf.

250

Vs(0.0-30.0)=163m/s

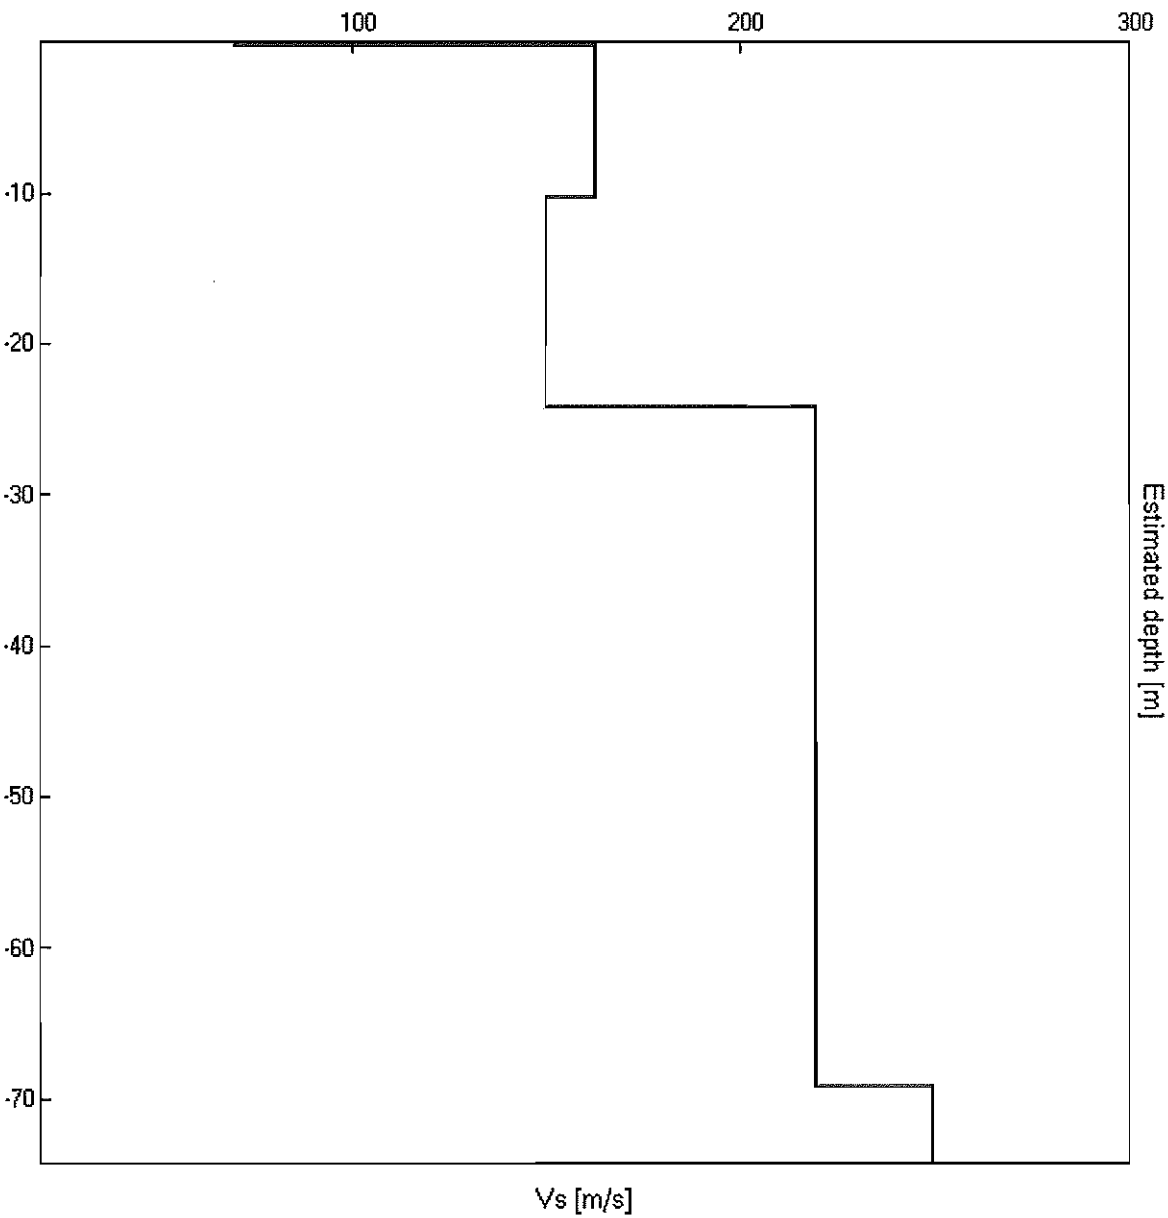

[According to the Sesame, 2005 guidelines. Please read carefully the Grilla manual before interpreting the following tables.]

Max. H/V at 0.25 ± 0.02 Hz. (in the range 0.0 - 20.0 Hz).

Criteria for a reliable HVSR curve

[All 3 should be fulfilled]

$f_0 > 10 / L_w$	$0.25 > 0.50$		NO
$n_c(f_0) > 200$	$255.0 > 200$	OK	
$\sigma_A(f) < 2$ for $0.5f_0 < f < 2f_0$ if $f_0 > 0.5\text{Hz}$ $\sigma_A(f) < 3$ for $0.5f_0 < f < 2f_0$ if $f_0 < 0.5\text{Hz}$	Exceeded 0 out of 13 times	OK	

Criteria for a clear HVSR peak

[At least 5 out of 6 should be fulfilled]

Exists f^- in $[f_0/4, f_0] \mid A_{H/V}(f^-) < A_0 / 2$	0.094 Hz	OK	
Exists f^+ in $[f_0, 4f_0] \mid A_{H/V}(f^+) < A_0 / 2$	0.469 Hz	OK	
$A_0 > 2$	$0.92 > 2$		NO
$f_{\text{peak}}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	$ 0.03279 < 0.05$	OK	
$\sigma_f < \varepsilon(f_0)$	$0.0082 < 0.05$	OK	
$\sigma_A(f_0) < \theta(f_0)$	$0.0854 < 2.5$	OK	

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20